



**IMiS<sup>®</sup>/Storage Connector  
Manual**

Version 9.9.1810

**IMAGING  
SYSTEMS**

Imaging Systems Inc.  
Brnciceva 41 G  
Ljubljana  
Slovenia

## TABLE OF CONTENTS

1	INTRODUCTION.....	5
1.1	About this guide .....	5
1.2	Target audience.....	5
1.3	Abbreviations .....	5
2	GENERAL.....	7
2.1	Integration with Java and .NET applications .....	7
2.2	Objects on different archive servers .....	8
2.3	Security and high availability .....	8
2.4	Advanced features .....	9
2.5	Use in SOA architecture .....	9
2.6	Versions.....	9
3	SYSTEM REQUIREMENTS.....	11
3.1	Hardware .....	11
3.1.1	Minimum requirements .....	11
3.1.2	Recommended requirements.....	12
3.2	Software.....	13
4	ADMINISTRATION.....	14
4.1	Installation .....	14
4.1.1	Installation process for the .NET version.....	15
4.1.2	Installation process for the Java version.....	25
4.2	Start up and shut down.....	26
4.3	Upgrading.....	26
4.3.1	Upgrading process for the .NET version .....	26
4.3.2	Upgrading process for the Java version .....	27
4.4	Removal.....	27
4.4.1	Removal process for the .NET version.....	27
4.4.2	Removal process for the Java version.....	31
5	RUNNING THE PRODUCT .....	32
5.1	Components.....	32
5.2	Interface for IMiS®/ARChive Server 7 .....	33
5.2.1	“StorageConnector” .....	33
5.2.2	“Storage” .....	36
5.2.3	“Document” .....	38
5.2.4	“AuditLog” .....	39
5.3	Interface for IMiS®/ARChive Server 9 .....	40
5.3.1	“StorageConnector” .....	47

5.3.2	“IArchive” .....	50
5.3.3	“IDirectory”, “IDirectoryEntity” and “IUserProfile” .....	53
5.3.4	“IEntityStub” .....	55
5.3.5	“IEntity”, “IClass”, “IFolder” and “IDocument” .....	59
5.3.6	“IReadOnlyProperty” and “IProperty” .....	64
5.3.7	“IReadOnlyContent”, “IContent” and “IContentPart” .....	66
5.3.8	“IRetention”, “IRetentionPolicyEntry”, “IRetentionPolicyContext” and “IDispositionHoldEntry” .....	68
5.3.9	“IReviewStub” .....	71
5.3.10	“IReview” .....	73
5.3.11	“AuditLog” .....	76
5.3.12	“AuditQuery” .....	77
5.4	Examples of use .....	79
5.4.1	Initializing IMiS®/Storage Connector.....	80
5.4.2	Finalizing IMiS®/Storage Connector .....	80
5.4.3	Examples for IMiS®/ARChive Server version 7 .....	81
5.4.4	Examples for IMiS®/ARChive Server version 9.....	85
5.4.5	Logging IMiS®/Storage Connector.....	109
6	TROUBLESHOOTING.....	114
6.1	Problems using IMiS®/Storage Connector .NET version.....	114
6.1.1	Issues with references in a development project .....	114
6.2	Problems using IMiS®/Storage Connector Java version.....	115
6.2.1	Issues with references in a development project .....	115
6.2.2	Issues with unhandled errors .....	116
6.2.3	Problems opening a session between the server and a client.....	117
6.2.4	Problems with log editing rights.....	118
6.3	List of errors that may occur when using IMiS®/Storage Connector .....	119
6.3.1	Errors in IMiS®/ARChive Server 7.....	119
6.3.2	Errors for IMiS®/ARChive Server 9.....	124

## TABLE OF IMAGES

Table of images appearing in the manual

Image 1: IMiS®/Storage Connector architecture .....	8
Image 2: Preparing to install.....	15
Image 3: Beginning the IMiS®/Storage Connector installation procedure .....	16
Image 4: Cancelling the IMiS®/Storage Connector installation procedure .....	16
Image 5: Reviewing and accepting the license agreement .....	17
Image 6: Customer information dialog box .....	17
Image 7: Choice between complete and custom installation.....	18
Image 8: Selecting the elements and location of IMiS®/Storage Connector installation .....	18
Image 9: Description of the installation element icons.....	19
Image 10: Selecting the destination folder .....	19
Image 11: Available disk space.....	20
Image 12: Selecting the elements of IMiS®/Storage Connector .NET Developer Edition installation.....	21
Image 13: Confirming settings to begin installation .....	21
Image 14: Installation progress bar .....	22
Image 15: Installation complete message .....	22
Image 16: Silent installation using msixex.exe program .....	23
Image 17: Uninstalling IMiS®/ StorageConnector using Add/Remove Programs .....	28
Image 18: Confirming uninstallation.....	28
Image 19: Uninstallation progress bar .....	28
Image 20: Opening the IMiS®/Storage Connector program maintenance .....	29
Image 21: Selecting a program maintenance action for the IMiS®/Storage Connector .....	29
Image 22: Confirming IMiS®/Storage Connector uninstallation.....	30
Image 23: Uninstallation complete message.....	30

# 1 INTRODUCTION

## 1.1 About this guide

The manual IMiS®/Storage Connector describes the application programming interface (API) of the software IMiS®/Storage Connector in development environments .NET and Java, its objects, installation and implementation, and provides possible solutions for some common problems with the interface use.

## 1.2 Target audience

This IMiS®/Storage Connector guide is intended for administrators and application developers with adequate prior knowledge who require information about installing, configuring and administering the IMiS®/Storage Connector interface. It is also intended for integrating applications with IMiS®/ARChive Server.

To better understand how the software works, and to achieve a more in-depth overview of archive server functionalities, administrators, application developers and users can also consult our guides for IMiS®/Client and IMiS®/ARChive Server.

Application developers have at their disposal development documentation with a detailed description of the IMiS®/Storage Connector interface, which is a part of the *Developer Edition* installation package.

## 1.3 Abbreviations

The table below describes abbreviations used in the texts and illustrations:

Abbreviation	Description
ACL	Access Control List (a list of access rights)
AES	Advanced Encryption Standard (an advanced encryption algorithm)
AIP	Archival Information Package (A content and metadata “summary” of an entity merged into an XML document)

<b>Abbreviation</b>	<b>Description</b>
API	Application Programming Interface (set of subroutine definitions, protocols and tools for building application software)
BPM	Business Process Management (improving business performance outcomes and operational agility)
CRM	Customer Relationship Management (a system for customer relationship management)
DLL	Dynamic-Link Library (program library in Windows environment)
DMS	Document Management System (a system for document management)
ERP	Enterprise Resource Planning (a business information system)
GAC	Global Assembly Cache (global cache for .NET library)
IPv4	Internet Protocol version 4 (communication protocol version 4)
IPv6	Internet Protocol version 6 (communication protocol version 6)
J2EE	Java 2 platform, Enterprise Edition (computing platform for enterprise software)
JAR	Java ARChive file (.jar file to distribute application software or libraries on the Java platform)
Java	JAVA programming language (object-oriented computer programming language)
KRB5TGS	Kerberos 5 Ticket Granting Service (computer network authentication protocol)
LDAP	Lightweight Directory Access Protocol (internet protocol for accessing and maintaining distributed directory information services)
MIME	Multipurpose Internet Mail Extensions
.NET	Microsoft .NET Framework (computer programming environment)
RAM	Random Access Memory (computer data storage)

<b>Abbreviation</b>	<b>Description</b>
SOAP	Simple Object Access Protocol (protocol specification for exchanging structured information in the implementation of web services)
SRP-6a	Secure Remote Password revision 6a (password-authenticated key agreement (PAKE) protocol)
TCP/IP	Transmission Control Protocol / Internet Protocol (a family of network protocols)
XML	Extensible Markup Language (a markup language for hierarchically structuring data in the form of text files)
ZIP	ZIP file format (.zip archive file format)

Table 1: Abbreviation usage in the documentation

## 2 GENERAL

IMiS®/Storage Connector is an application program interface (API) for transferring objects (scanned documents and other files) between application servers and IMiS®/ARChive Server. Objects are delivered at the request of the application for saving and viewing archived objects to/from the archive server. The interface facilitates fast response times and high throughput even when large numbers of objects are interchanged simultaneously.

### 2.1 Integration with Java and .NET applications

IMiS®/Storage Connector is built around the widely-used .NET and Java software environments.

It contains a wealth of programming objects with an easy-to-use interface (API).

This makes it possible to quickly design functionally advanced applications for accessing IMiS®/ARChive Server.

A binary protocol is used for communication with the archive server, which essentially speeds up communication and ensures high responsiveness and throughput. Users of applications (DMS, ERP, CRM, BPM ...) view the delivered objects in these applications' integrated browsers.

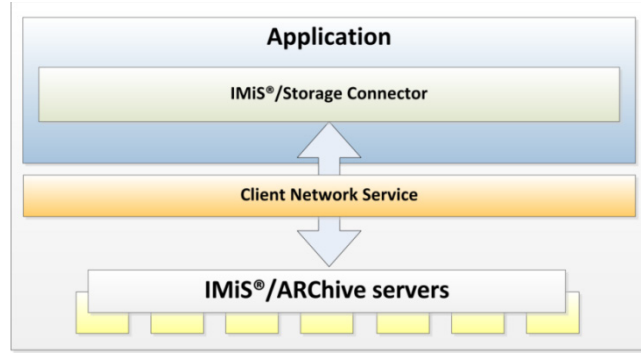


Image 1: IMiS®/Storage Connector architecture

IMiS®/Storage Connector .NET version is intended for integration with applications on .NET Framework 2.0, 3.5 and 4.0.

IMiS®/Storage Connector Java version is intended for integration with applications on J2EE 1.5.0\_22 (or newer).

## 2.2 Objects on different archive servers

If a configuration with multiple IMiS®/ARChive Servers located at different locations is being used, users can access objects saved on multiple archive servers through a single application.

## 2.3 Security and high availability

IMiS®/Storage Connector uses an encrypted communications protocol and algorithms to communicate with different information systems. This prevents potential eavesdroppers without proper authorizations from accessing the information. It can also function in highly restrictive application environments which prevent access to the file system and which exclusively use executable memory (RAM) for their operations.

The use of automatic toggling between nodes provides IMiS®/ARChive Server with high availability in the event that problems occur. This ensures the 100% accessibility of archived content.



## 2.4 Advanced features

IMiS®/Storage Connector uses advanced algorithms for session pooling to ensure responsiveness and throughput for application servers with large workloads.

For application solutions that require content streaming, the object model ensures all necessary components for these processes.

By using advanced caching algorithms, it reduces the need for communication between application servers and the archive server and therefore provides the system with greater throughput.

## 2.5 Use in SOA architecture

IMiS®/Storage Connector can also be used with IMiS®/Storage Connector SOAP Service. This enables access to objects on IMiS®/ARChive Server through an online server as a web service. Communications between the interface and the archive server take place using a binary protocol, while communications with the application use a standardized service-oriented architecture (SOAP) protocol.

IMiS®/Storage Connector SOAP Service is used when support for an SOA communications protocol is needed (in terms of architecture or technology) to save and read objects on the archive server or to read object properties (time of creation, last edited, and other metadata about an object). It is currently only available for the Java environment and enables a web service to be set up on systems with J2EE 1.5.0\_22 (or newer).

## 2.6 Versions

Product version labeling is based on a scheme that includes the following:

- An identifier of the installation platform (PLATFORM).
- An optional identifier of the processor architecture (ARCHITECTURE).
- Four separate numerical identifiers (MAJOR, MINOR, RELEASE, BUILD).
- An identifier for the installation package edition (EDITION).
- An installation package extension (EXTENSION) that changes based on the installation platform.

This is what the scheme looks like:

*IMiS.StorageConnector.PLATFORM.ARCHITECTURE.MAJOR.MINOR.RELEASE.BUILD.EDITION.EXTENSION*

The examples of installation package names for the .NET and Java platforms:

*IMiS.StorageConnector.NET.x86.9.9.1810.Developer.Edition.msi*

*IMiS.StorageConnector.Java.9.9.1810.Runtime.zip*

The scheme consists of the name of the IMiS®/Storage Connector module and the following elements:

- **PLATFORM:** This identifier represents the type of platform for which the installation package is intended. The possible values are *NET* and *Java*. *NET* represents an installation package intended for installation on the .NET platform, and *Java* represents an installation package intended for installation on the Java platform.
- **ARCHITECTURE:** This identifier represents the target processor architecture. The possible values are *x86* and *x64*. *x86* represents a 32-bit processor architecture, and *x64* represents a 64-bit processor architecture.
- **MAJOR:** This identifier represents the major product version or product generation. It rarely changes in terms of changes in the system and features. A change indicates a considerable difference in the product compared to the previously released version. This identifier has a range of values from 1 to n; it is continuous and the values can only increase.
- **MINOR:** This identifier indicates a minor version of the product. It changes more frequently than the main version in terms of changes to the system, features and fixes. A change in the minor version represents smaller changes and fixes in the framework of the same product generation (indicated by the main or major version). The range of values is from 1 to n. This number is not continuous. It resets to its base value (1) with each new MAJOR version.
- **RELEASE:** This identifier represents the time component of the product release in accordance with the YYMM scheme. MM indicates the month of the release (range of values from 01 to 12), and YY indicates the last two digits of the year.

*Example: The RELEASE identifier for a product released in October of 2018 will read 1810.*

- **BUILD:** The identifier in this position indicates the unique serial number of the product build; this number never repeats. If smaller changes are made to the product within a single month, this identifier may change. In this case, all other identifiers remain the same. The range of values is from 1 to n. This number is not continuous and can only increase.
- **EDITION:** This identifier represents the type of installation package based on the target users.

*Developer.Edition* represents an installation package intended for developers.

Besides libraries, this package also contains everything needed to develop applications that use the interface (development documentation, examples, etc.)

*Runtime* indicates the installation package installed by an administrator. It contains the product libraries needed to run applications that use the product.

## 3 SYSTEM REQUIREMENTS

For successful installation and execution, the IMiS®/Storage Connector interface has the following hardware and software requirements.

### 3.1 Hardware

Practically all computers currently available on the market meet the hardware requirements for running IMiS®/Storage Connector.

Minimum and recommended requirements are listed below.

#### 3.1.1 Minimum requirements

Minimum requirements for IMiS®/Storage Connector .NET:

- 400 MHz (.NET 2.0, 3.5) / 1 GHz (.NET 4.0) Intel Pentium 32-bit (x86) or 64-bit (x64) processor or another compatible processor. \*
- 96 MB (.NET 2.0, 3.5) / 512 MB RAM (.NET 4.0) of RAM. \*
- 5 MB (Runtime) / 650 MB (Developer Edition) of unused hard disk space. \*\*

- Network access using the TCP/IP protocol (IPv4 or IPv6).

*Notes:*

\* This is a brief summary of the minimum hardware requirements for .NET Framework 2.0, 3.5 and 4.0 as listed on Microsoft's website: <http://msdn.microsoft.com/en-us/library/8z6watww%28v=vs.100%29.aspx>

\*\* The amount of unused space listed here is the space required for installation.

The IMiS®/Storage Connector .NET Developer Edition installation package includes installation packages for .NET Framework 2.0, 3.5 and 4.0. In case packages are not installed, additional amount of space is needed for installation (see the link under note \*). Following installation, some of the space is freed up.

#### Minimum requirements for IMiS®/Storage Connector Java:

- Intel Pentium 166 MHz processor. \*
- 32 MB RAM. \*
- 5 MB (Runtime) / 650 MB (Developer Edition) of unused hard disk space. \*\*
- Network access using the TCP/IP protocol (IPv4 or IPv6).

*Notes:*

\* This is a brief summary of the minimum hardware requirements for Java 2 Runtime Environment 1.4.2 for Microsoft Windows as listed on Oracle's website:

<http://www.oracle.com/technetwork/java/javase/install-windows-137451.html>

\*\* The amount of unused space listed here is the space required for installation. Following installation, some of the space is freed up.

### 3.1.2 Recommended requirements

#### Recommended requirements for IMiS®/Storage Connector .NET:

- 800 MHz (.NET 2.0, 1) / 1 GHz (.NET 4.0) Intel Pentium 32-bit (x86) or 64-bit (x64) processor or another compatible processor (or faster). \*
- 256 MB (.NET 2.0, 3.5) / 512 MB (.NET 4.0) of RAM. \*
- 5 MB (Runtime) / 650 MB (Developer Edition) of unused hard disk space. \*\*
- Network access using the TCP/IP protocol (IPv4 or IPv6).

*Notes:*

\* This is a brief summary of the minimum hardware requirements for .NET Framework 2.0, 3.5 and 4.0 as listed on Microsoft's website: <http://msdn.microsoft.com/en-us/library/8z6watww%28v=vs.100%29.aspx>

\*\* The amount of unused space listed here is the space required for installation. The IMiS®/Storage Connector .NET Developer Edition installation package includes installation packages for .NET Framework 2.0, 3.5 and 4.0.

In case packages are not installed, additional amount of space is needed for installation (see the link under note \*). Following installation, some of the space is freed up.

Recommended requirements for IMiS®/Storage Connector Java:

- 166 MHz Intel Pentium processor or faster. \*
- 48 MB or more of RAM. \*
- 5 MB of unused hard disk space. \*\*
- Network access using the TCP/IP protocol (IPv4 or IPv6).

*Notes:*

\* This is a brief summary of the minimum hardware requirements for Java 2 Runtime Environment 1.4.2 for Microsoft Windows as listed on the website of the Oracle company:

<http://www.oracle.com/technetwork/java/javase/install-windows-137451.html>

\*\* The amount of unused space listed here is the space required for installation. Following installation, some of the space is freed up.

## 3.2 Software

Software requirements for IMiS®/Storage Connector differ depending on the platform being used - .NET or Java.

Requirements for IMiS®/Storage Connector .NET: \*

- Microsoft Windows 7 (32/64-bit), Windows Server 2003 (32/64-bit), Windows Server 2008 (32/64-bit).
- Microsoft .NET Framework 2.0, 3.5 or 4.0.

*Notes:*

\* This is a summary of the operation systems supported for .NET Framework 2.0, 3.5 and 4.0 as listed on Microsoft's website: <http://msdn.microsoft.com/en-us/library/Bz6watww%28v=vs.100%29.aspx>

Requirements for IMiS®/Storage Connector Java:

- Microsoft Windows 7 (32-bit), Windows Server 2003 (32/64-bit), Windows Server 2008 (32-bit).
- Solaris 8, 9, 10 OS (32-/64-bit).

- Oracle Enterprise Linux 4.8, 5.4, 5.5, 6.X; Red Hat Enterprise Linux AS 2.1 (32/64-bit), ES 2.1, WS 2.1, ES 3.0, AS 3.0 (32/64-bit), ES 4.0 (32/64-bit), AS 4.0 (32/64-bit), 5.X, 6.X; SUSE 8, 8.2, 9, 9.1, 9.2 (32/64-bit), 10, 11; SUSE Linux Enterprise Server 8, 9, 10, 11 (32/64-bit); TurboLinux 8.0, Sun Java™ Desktop System, Release 1, 2.
- Java 2 Runtime Environment version 1.5.0\_22

*Notes:*

\* This is a summary of the operating systems supported for Java 2 Platform 1.5 as listed on Oracle's website:

<http://www.oracle.com/technetwork/java/javase/system-configurations-139862.html>

## 4 ADMINISTRATION

The IMiS®/Storage Connector interface can be administered by administrators and/or application developers.

Administration encompasses installation, start up, shut down, upgrading and removal of the software.

### 4.1 Installation

Installation can be performed by an administrator in an environment that meets the minimum installation requirements. The minimum requirements can be upgraded if the need to do so is foreseen.

IMiS®/Storage Connector .NET is available in two different MSI installation packages:

- IMiS®/Storage Connector .NET Runtime contains interface libraries that are installed to the Global Assembly Cache (GAC).
- IMiS®/Storage Connector .NET Developer Edition contains everything needed for the development, distribution and execution of applications that use the interface: libraries, examples for developers and tools for application redistribution and the option of installing libraries to the Global Assembly Cache (GAC).

IMiS®/Storage Connector Java is currently only available as a ZIP package containing libraries and interface development documentation. Installation of the Java package is performed manually and requires the installation of libraries to the appropriate location.

#### 4.1.1 Installation process for the .NET version

IMiS®/Storage Connector .NET installation can be performed by an administrator using the installation package or manually. Installation with the installation package can be performed using a wizard or as a silent installation without a user interface. Installation using a wizard is performed in English.

##### 4.1.1.1 Installation with the installation wizard

The process for installing IMiS®/Storage Connector .NET using the installation wizard is described below. The installation wizard is a user interface found in the installation package. It guides the administrator through the installation process.

An example of an installation package name:

*IMiS.StorageConnector.NET.x86.9.9.1810.msi.*

Installation begins by running the installation package from the file system. A dialog box will appear informing the administrator that the installation package is being prepared for installation.

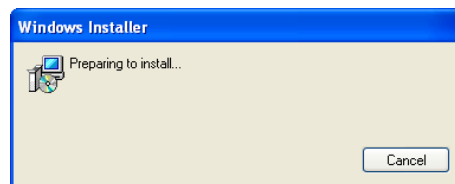


Image 2: Preparing to install

This is followed by the wizard's welcome screen, where the user can choose to continue or cancel the installation.



Image 3: Beginning the IMiS®/Storage Connector installation procedure

In each of the following steps, the user may perform the following actions:

- By clicking the Next button, they may continue the installation.
- By clicking the Back button, they may go back to the previous step.
- By clicking the Cancel button, they may cancel the installation.

If the installation process is cancelled using the *Cancel* button, a dialog box appears.

By selecting *Yes*, the user will cancel the installation; by selecting *No*, the user will continue with the installation process.

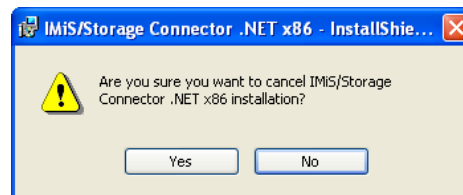


Image 4: Cancelling the IMiS®/Storage Connector installation procedure

If the installation process is cancelled, any installation files and settings installed in the Windows register are deleted.



In the following step, the administrator carefully reads the terms of the licensing agreement. If the administrator agrees with the terms, they select “*I accept the terms in the license agreement*” and accept the licensing terms in their entirety.

If the administrator does not agree with the terms, they select “*I do not accept the terms in the license agreement*” and click the *Cancel* button to cancel the installation process.

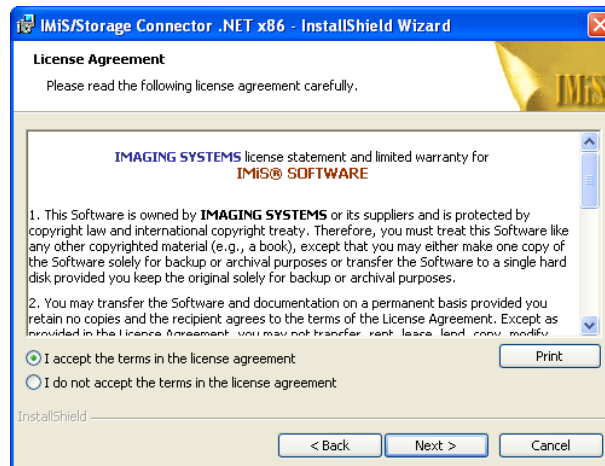


Image 5: Reviewing and accepting the license agreement

The installation process will then prompt the user to enter a user name in the *User Name* field and the name of the organization in the *Organization* field. They then select whether the application will only be installed for the current user - the “*Only for me*” option - or for all users on this computer - the “*Anyone who uses this computer*” option.

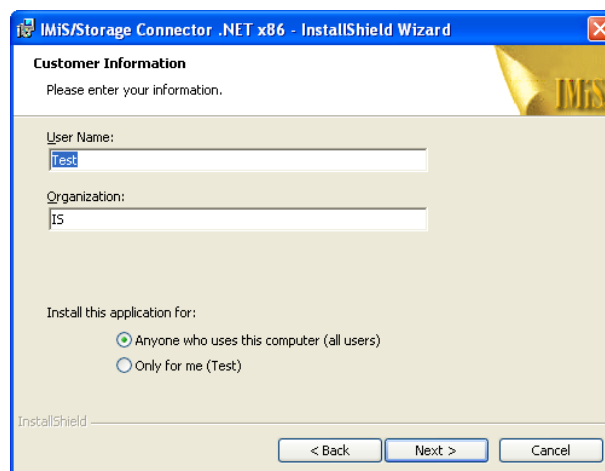


Image 6: Customer information dialog box

In the following step the user selects whether they would like to perform a complete installation (*the Complete option*) or a custom installation (*the Custom option*).

Complete installation will install all files from the installation package on the file system.

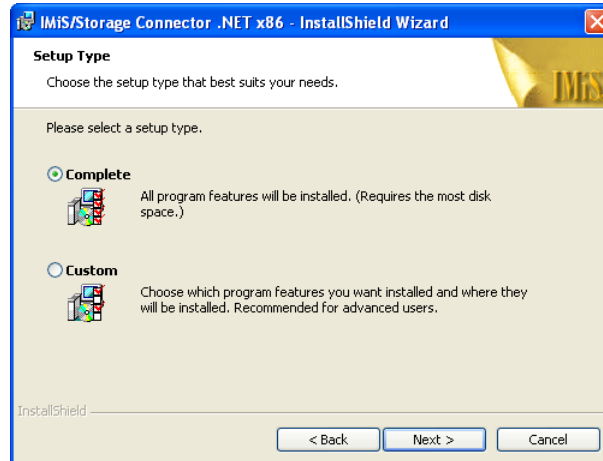


Image 7: Choice between complete and custom installation

If the user chooses custom installation, a dialog box will appear where they may select which IMiS®/Storage Connector .NET elements they would like to install and specify a destination.

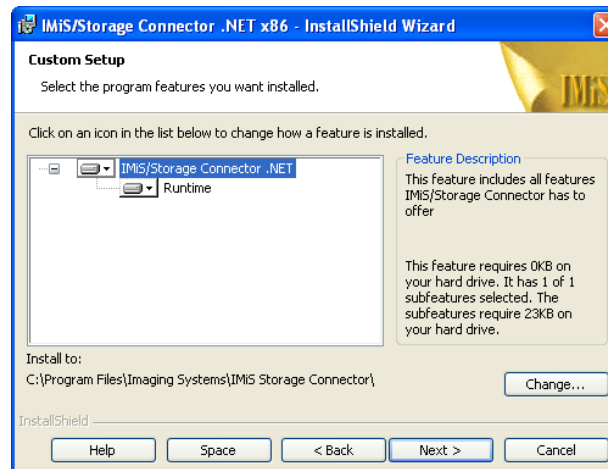


Image 8: Selecting the elements and location of IMiS®/Storage Connector installation

Clicking the *Help* button will open a window with information on the icons that appear in front of the names of the elements for installation.

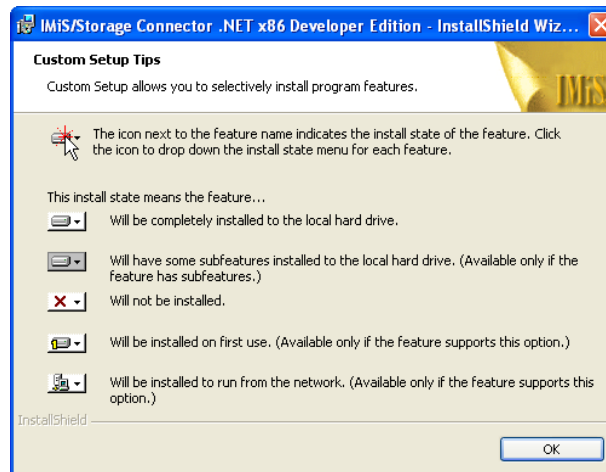


Image 9: Description of the installation element icons

By clicking the *Change* button, the administrator can change the installation location of IMiS®/Storage Connector .NET. A dialog will appear where they may select the destination folder; once selected, the selection is confirmed by pressing *OK*.

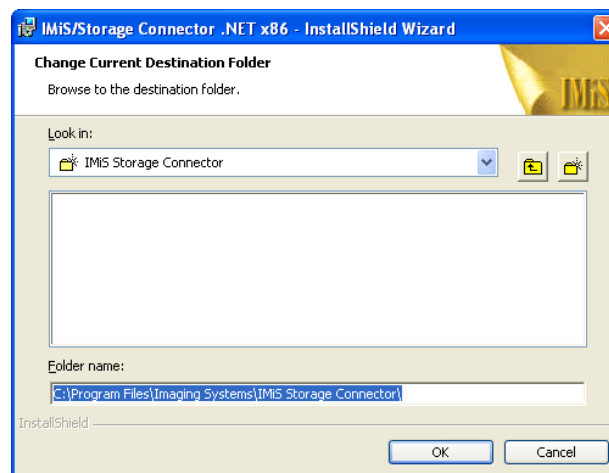


Image 10: Selecting the destination folder

Clicking the *Space* button will show whether there is enough space at the desired location. A dialog box will appear with a list of all available disks and information on their size and the space available on individual disks. Disks on which too little space is available for installation are highlighted.

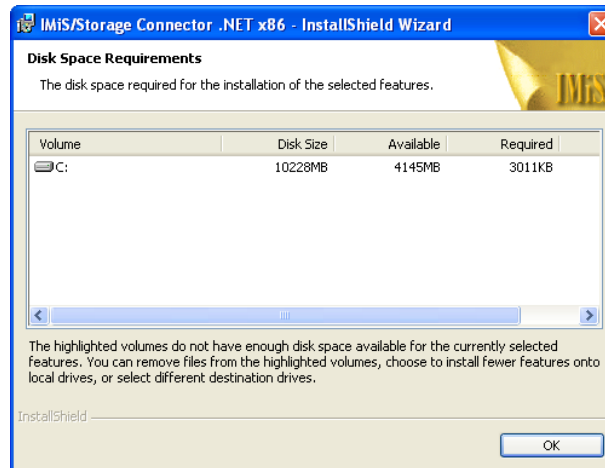


Image 11: Available disk space

The selection of elements available for installation depends on the version of the installation package. With the IMiS®/Storage Connector .NET Runtime version, only the Runtime element is available. This element will install IMiS®/Storage Connector .NET to the Global Assembly Cache (GAC).

With the IMiS®/Storage Connector .NET Developer Edition version of the installation package, the administrator can choose from the following elements:

- *Development for Microsoft .NET v2.0.* this will install the environment for developing application with the IMiS®/Storage Connector .NET interface for .NET Framework 2.0. The environment contains the appropriate libraries, development documentation and examples and the installation package for .NET Framework 2.0.
- *Development for Microsoft .NET v3.5.* this will install the environment for developing application with the IMiS®/Storage Connector .NET interface for .NET Framework 3.5. The environment contains the appropriate libraries, development documentation and examples and the installation package for .NET Framework 3.5.
- *Development for Microsoft .NET v4.0.* this will install the environment for developing application with the IMiS®/Storage Connector .NET interface for .NET Framework 4.0. The environment contains the appropriate libraries, development documentation and examples and the installation package for .NET Framework 4.0.

- *Redistributables*: this will install tools for the redistribution of applications that use the IMiS®/Storage Connector .NET interface.
- *Runtime*: this will install IMiS®/Storage Connector .NET to the Global Assembly Cache (GAC).

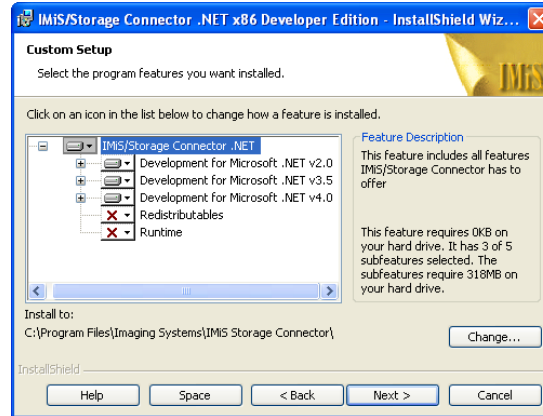


Image 12: Selecting the elements of IMiS®/Storage Connector .NET Developer Edition installation

In the following step of the installation wizard, the administrator will be asked to confirm the selected installation and can start the installation process by clicking the Install button.

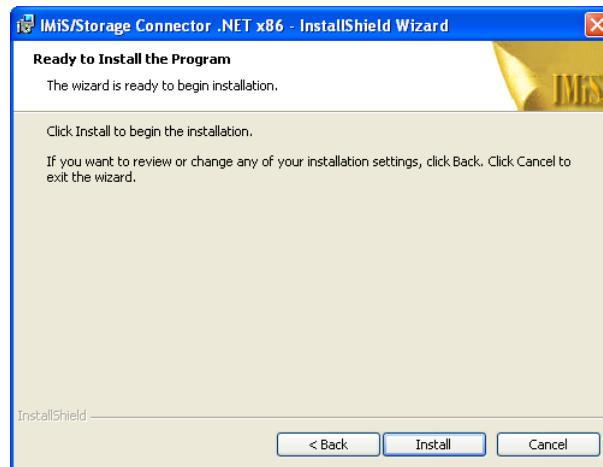


Image 13: Confirming settings to begin installation

This will start the process for installing IMiS®/Storage Connector .NET. The progress bar in the window shows how far along the process of transferring the files to the specified destination is. Installation can take from several seconds to several minutes, depending on the version of the installation package and the speed of the computer.

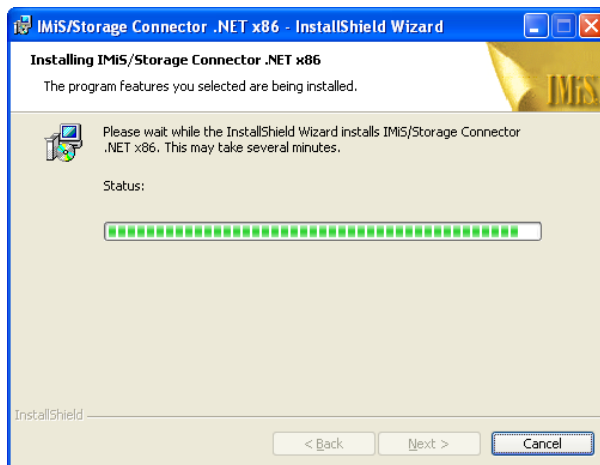


Image 14: Installation progress bar

Upon completion of installation, a dialog box will appear informing the administrator that installation has been successfully completed. To close the window, click the *Finish* button.



Image 15: Installation complete message

#### 4.1.1.2 Silent installation

IMiS®/Storage Connector .NET installation can also be performed without user guidance or an installation wizard. This type of installation is known as silent installation.

To perform silent installation, the administrator uses the *msiexec.exe* program, which can be found in the *System32* Windows system directory.

This tool forms part of Microsoft's installation product. It is used to perform various maintenance tasks on applications installed on the Windows operating system.

Additional information about *msiexec.exe* is available on Microsoft's website:

[http://msdn.microsoft.com/en-us/library/windows/desktop/aa367449\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/aa367449(v=vs.85).aspx)

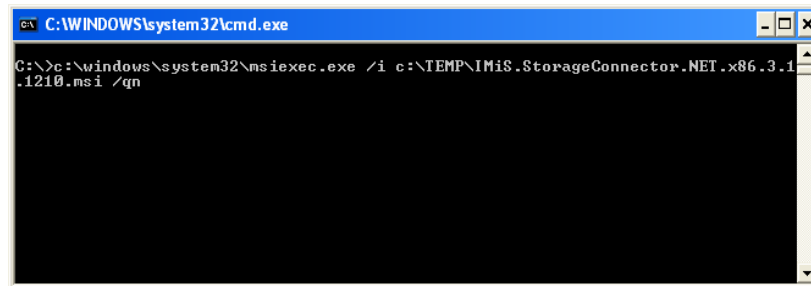


Image 16: Silent installation using msiexec.exe program

Silent installation of IMiS®/Storage Connector .NET can be launched using a command line in the *cmd.exe* command prompt, which is also located in the *System32* Windows system directory.

The command line consists of the *msiexec.exe* program, */i* parameters, which are used to specify the path to the installation package, and */q* and */qn* parameters, which are used to specify the installation method without the use of a user interface. Installation can take from several seconds to several minutes, depending on the version of the installation package and the speed of the computer.

An example of a command line for silent installation:

```
C:\>msiexec.exe /i c:\TEMP\IMiS.StorageConnector.NET.x64.9.9.1810.msi /qn
```

The table below lists common methods for installing with *msiexec.exe* which can be specified using the parameters. A list of all parameters is available on Microsoft's website:

[http://msdn.microsoft.com/en-us/library/windows/desktop/aa367988\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/aa367988(v=vs.85).aspx)

Parameters	Description
/q	Installation without the use of a user interface.
/qn	Installation without the use of a user interface. Same as /q.
/qn+	Installation without the use of a user interface, with a modal window upon completion of installation.
/qb	The basic user interface with a simplified progress bar. The /gb! parameter is used to hide the <i>Cancel</i> button.
/qr	A simplified user interface, without a modal window upon completion of installation.
/qf	The entire user interface, including all dialog boxes, a progress bar and a list of errors upon completion of installation.

The administrator can further customize silent installation of IMiS®/Storage Connector .NET using parameters specific to this installation. Parameters are added to the end of the command line in the following form: parameter=value.

An example of a command line for silent installation to the selected directory:

```
C:\>msiexec.exe /i c:\TEMP\IMiS.Scan.9.9.1810.Full.msi /qn INSTALLDIR=C:\IMIS\
```

The table below contains descriptions of the supported command line parameters:

Parameters	Value	Description
INSTALLDIR	<directory name>	This value contains the default installation directory (Default = "%PROGRAMFILES%\IS\IMiS Storage Connector\").
USERNAME	<user name>	The value contains the user name of the user performing the installation (the default value is taken from the system settings).
COMPANYNAME	<company name>	The value contains the name of the company performing the installation (the default value is taken from the system settings).

Logging of silent installation can be turned on with the log parameter.

An example of a command line for silent installation with logging:

```
C:\>msiexec.exe /i c:\TEMP\IMiS.StorageConnector.NET.x64.9.9.1810.msi /log c:\TEMP\setup.log /qn
```

Additional information about *msiexec.exe* is available on Microsoft's website:

[http://msdn.microsoft.com/en-us/library/windows/desktop/aa367449\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/aa367449(v=vs.85).aspx)



### 4.1.1.3 Manual installation

IMiS®/Storage Connector .NET can also be manually installed.

To install IMiS®/Storage Connector .NET Runtime, the administrator must install all libraries to the Global Assembly Cache (GAC). This is done with the *gacutil.exe* program.

This tool was installed together with Microsoft Visual Studio or Windows SDK.

The command line is made up of the *gacutil.exe* program and */i* parameters used to specify the path to the .NET library the user would like to install.

An example of a command line for installing libraries to the GAC:

```
C:\>gacutil.exe /i imisbase.net.dll
C:\>gacutil.exe /i iacxnone.net.dll
C:\>gacutil.exe /i iarcli.net.dll
C:\>gacutil.exe /i storageconnector.net.dll
```

Additional information about *gacutil.exe* is available on Microsoft's website:

[http://msdn.microsoft.com/en-us/library/ex0ss12c\(v=vs.80\).aspx](http://msdn.microsoft.com/en-us/library/ex0ss12c(v=vs.80).aspx)

[http://msdn.microsoft.com/en-us/library/ex0ss12c\(v=vs.90\).aspx](http://msdn.microsoft.com/en-us/library/ex0ss12c(v=vs.90).aspx)

[http://msdn.microsoft.com/en-us/library/ex0ss12c\(v=vs.100\).aspx](http://msdn.microsoft.com/en-us/library/ex0ss12c(v=vs.100).aspx)

To use IMiS®/Storage Connector .NET in a development environment, it is sufficient to copy all the libraries to the selected folder and to create a reference to the *storageconnector.dll* library in the development project. For more information see chapter [Components](#).

### 4.1.2 Installation process for the Java version

Installation of the IMiS®/Storage Connector Java interface is performed manually.

To install IMiS®/Storage Connector Java Runtime, all libraries need to be copied to a special location in Java 2 Runtime Environment (J2RE) or Java 2 SDK (J2SDK) through which the *Java Extension Mechanism* will be able to locate the suitable JAR library.

For more information see chapter [Components](#).

This location is:

```
<java-home>/lib/ext           [in Java 2 Runtime Environment]
<java-home>/jre/lib/ext       [in Java 2 SDK]
```

Here *<java-home>* represents the folder where J2RE or J2SDK is installed.

Additional information about *Java Extension Mechanism* and installing JAR libraries is available on Oracle's website: <http://docs.oracle.com/javase/1.5.0/docs/>

To use IMiS®/Storage Connector Java in a development environment, it is sufficient to copy all the libraries (chapter [Components](#)) to the selected folder and to add a reference to the folder through JAR-class-path. Additional information about how Java locates the suitable libraries is available on Oracle's website: <http://docs.oracle.com/javase/1.5.0/docs/>

## 4.2 Start up and shut down

IMiS®/Storage Connector does not have a user interface. It is started through an application that uses the IMiS®/Storage Connector .NET or IMiS®/Storage Connector Java interface. The administrator also shuts down the program through the application.

## 4.3 Upgrading

If an administrator would like to upgrade a past version of the IMiS®/Storage Connector interface to a newer version, they follow the steps described below.

### 4.3.1 Upgrading process for the .NET version

Before starting upgrading the administrator must make sure that any applications that use IMiS®/Storage Connector .NET are not being used. If any such applications are in use, they first need to be shut down.

The upgrading process depends on how the current version was installed - with an installation package or manually.

If the current version was installed using an installation package the administrator can perform the upgrade without first removing existing files. The new version is installed using the process described in chapter [Installation with the installation wizard](#) and [Silent installation](#).

If an older version is installed, the installation package will automatically remove it and then install the new version.

If the installation was performed manually (as described in chapter [Manual installation](#)) the old versions can be manually removed from the GAC using a command line (as described in [Manual removal](#)).

Old versions of libraries installed in a development environment can simply be overwritten with the new libraries.

### **4.3.2 Upgrading process for the Java version**

Before starting upgrading the administrator must make sure that any applications that use IMiS®/Storage Connector Java are not being used. If any such applications are in use, they first need to be shut down.

In the upgrading process, old versions of the libraries installed in the Java Extension directory or the development environment are simply overwritten with the new libraries. For more information see chapter [Installation process for the Java version](#).

## **4.4 Removal**

### **4.4.1 Removal process for the .NET version**

Before removal the administrator must make sure that any applications that use IMiS®/Storage Connector .NET are not being used. This is done by checking that the application(s) that use these libraries are not running. The removal process then depends on how the IMiS®/Storage Connector interface was installed.

#### **4.4.1.1 Removing the installation package**

If IMiS®/Storage Connector was installed using an installation package and a wizard (chapter [Installation with the installation wizard](#)) or Silent installation, it can be removed from the computer simply by using the *Add or Remove Programs* application in Windows.

This application can be found by clicking the *Start* button on the desktop and selecting *Add or Remove Programs* from the *Control Panel*.

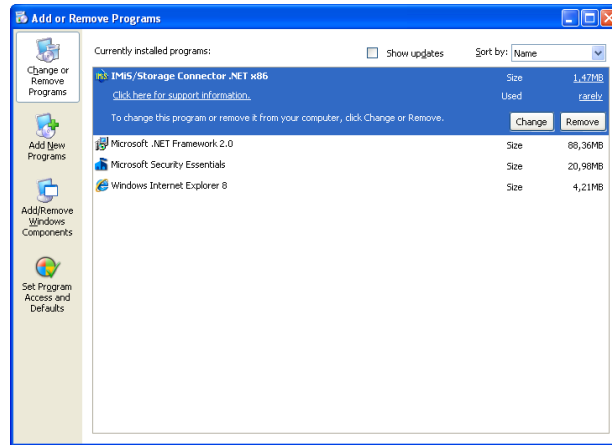


Image 17: Uninstalling IMiS®/ StorageConnector using Add/Remove Programs

Clicking the *Remove* button will open a dialog where the administrator confirms the removal by clicking *Yes* or cancels the removal by clicking *No*.




Image 18: Confirming uninstallation

If the removal is confirmed, it will start. Progress can be monitored in the dialog box. To cancel the removal, click the Cancel button.

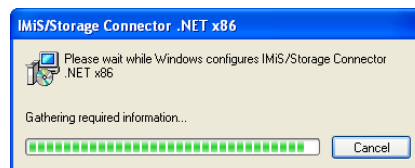


Image 19: Uninstallation progress bar

The removal process removes all files and settings created by the installation package. The administrator can also remove the program by clicking the *Change* button. This will first open the welcome screen of the installation wizard.

The process can be continued by clicking the *Next* button or cancelled by clicking *Cancel*.



Image 20: Opening the IMiS®/Storage Connector program maintenance

Clicking *Next* will open a dialog box with multiple options. To remove the program, the administrator selects the *Remove* option and clicks *Next*.

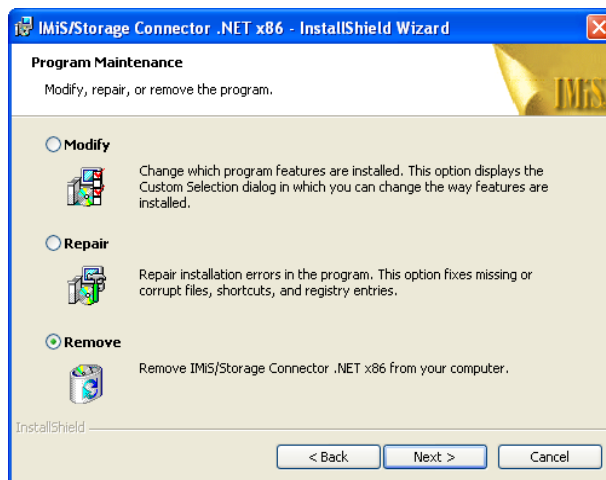


Image 21: Selecting a program maintenance action for the IMiS®/Storage Connector

In the next step, they confirm the removal by clicking the *Remove* button.

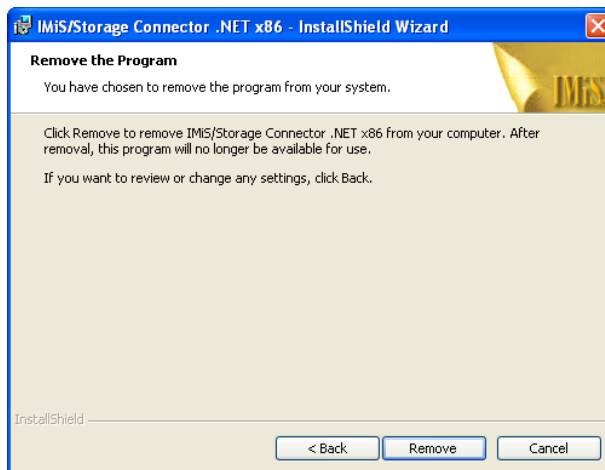


Image 22: Confirming IMiS®/Storage Connector uninstallation

Removal can take from several seconds to several minutes, depending on the version of the installation package and the speed of the computer. Once removal is complete, a final dialog window will appear. To close the window, click the Finish button.



Image 23: Uninstallation complete message

#### 4.4.1.2 Manual removal

If IMiS®/Storage Connector was manually installed (chapter [Manual installation](#)) the administrator must also remove it manually.

If IMiS®/Storage Connector .NET Runtime is installed, the administrator must remove all libraries from the Global Assembly Cache (GAC). This is done with the *gacutil.exe* program, which is part of Microsoft Visual Studio or Windows SDK.

An [example](#) of a command line for removing libraries from the GAC:

```
C:\>gacutil.exe /u imisbase.net.dll
C:\>gacutil.exe /u iacxnone.net.dll
C:\>gacutil.exe /u iarcli.net.dll
C:\>gacutil.exe /u storageconnector.net.dll
```

If IMiS®/Storage Connector .NET is installed in a development environment, all libraries must be removed from the folder where they were installed.

#### 4.4.2 Removal process for the Java version

To remove IMiS®/Storage Connector Java Runtime, all libraries installed to the special location in Java 2 Runtime Environment (J2RE) or Java 2 SDK (J2SDK) where the *Java Extension Mechanism* finds the suitable JAR library (chapter [Installation process for the Java version](#)) need to be deleted.

This location is:

```
<java-home>/lib/ext           [in Java 2 Runtime Environment]
<java-home>/jre/lib/ext       [in Java 2 SDK]
```

Here *<java-home>* represents the directory where J2RE or J2SDK is installed.

Removing IMiS®/Storage Connector Java in a development environment is equivalent to deleting all the libraries (chapter [Components](#)) from the selected folder in the development project (chapter [Installation process for the Java version](#)).

## 5 RUNNING THE PRODUCT

IMiS®/Storage Connector is used in applications or application servers to access IMiS®/ARChive Server. It runs on the .NET and Java platforms using an API.

The API is similar in both cases, as development was coordinated.

This chapter describes the basic components of the IMiS®/Storage Connector interface for the .NET and Java platforms and the most common examples of use of the API.

A more detailed description of the interface is available in the development documentation that forms a part of the *Developer Edition* installation package for the .NET and Java environments.

### 5.1 Components

The basic components of IMiS®/Storage Connector are libraries used by applications to access IMiS®/ARChive Server. With IMiS®/Storage Connector .NET version, these are assembly libraries in the form of *.dll* files.

With the IMiS®/Storage Connector Java version, they are equivalent to JAR libraries.

The main library which contains the *storageconnector.net.dll* interface in .NET or the *storageconnector.jar* interface in Java is described below.

All IMiS®/Storage Connector libraries are described in the table below:

.NET : Library	Description
imisbase.net.dll	<i>IMiS Base Assembly</i> - contains the basic components used in other IMiS .NET libraries and applications.
iacxapi.net.dll	<i>IMiS/ARC Compression API Assembly</i> - contains components that form the basis for all compression libraries for IMiS®/ARChive Server.
iarcli.net.dll	<i>IMiS/ARC Client Assembly</i> – contains components that enable work with sessions and objects in IMiS®/ARChive Server.
storageconnector.net.dll	<i>IMiS/Storage Connector Assembly</i> – contains components that enable work with archives and documents on IMiS®/ARChive Server and other archive servers.
sl-SI\iarcli.net.resources.dll	<i>IMiS/ARC Client Resources Assembly</i> – contains translations of <i>IMiS/ARC Client Assembly</i> in the language specified by the folder where the library is located. *
sl-SI\storageconnector.net.resources.dll	<i>IMiS/Storage Connector Assembly</i> – contains translations of <i>IMiS/Storage Connector Assembly</i> in the language specified by the folder where the library is located. *

\* Library not required to run IMiS®/Storage Connector .NET.



Java : Library	Description
imisbase.jar	<i>IMiS Base JAR</i> - contains basic components that implement frequently used objects and features in IMiS® Java libraries and applications.
iacxapi.jar	<i>IMiS/ARC Compression API JAR</i> - contains components that form the basis for all compression libraries for IMiS®/ARChive Server.
iarcli.jar	<i>IMiS/ARC Client JAR</i> – contains components that enable work with sessions and objects in IMiS®/ARChive Server.
storageconnector.jar	<i>IMiS/Storage Connector JAR</i> – contains components that enable work with archives and documents in IMiS®/ARChive Server and other archive servers.

## 5.2 Interface for IMiS®/ARChive Server 7

The application program interface (API) for IMiS®/ARChive Server version 7 consists of three objects in the *IMiS.StorageConnector* address space:

- *StorageConnector* – the main object of the IMiS®/Storage Connector application program interface.
- *Storage* – an archive on the client side linked to a specific archive server.
- *Document* – a document on the client side linked to a specific object on the archive server.

Besides logging, the *StorageConnector* object enables the opening of archives in the form of *Storage* objects. These objects in turn enable the opening of documents (files) in the archive represented by the *Document* objects. Besides these objects, the *AuditLog* object is also available for logging the audit trail for the documents in the archive.

A detailed description of interface objects for IMiS®/ARChive Server version 7 is presented below.

### 5.2.1 “StorageConnector”

*StorageConnector* is the primary object of the IMiS®/Storage Connector program interface. Access to the *singleton* object instance is managed through the *Instance* property, which is only valid until the *FreeInstance* method is called up. It contains methods for opening archives on different archive servers.

At the time of writing, only IMiS®/ARChive Server is supported. It enables logging settings and contains constants of the names of different options which are delivered together with the suitable values when opening an archive.

Below, the archive to IMiS®/ARChive Server is marked with the prefix *IMiSARC* for the .NET version and with the prefix *IMiS\_ARC* for the Java version. This usage is in accordance with the *StorageType* constants in the interface.

The *StorageConnector* object contains the following elements:

<b>.NET : Constant</b>	<b>Description</b>
MAX_OPTION_NAME_LENGTH	The maximum length of names for the audit trail.
OptionApplicationName	Option for the <i>IMiSARC</i> archive that determines the name of the application for the audit trail.
OptionAuthCryptoAlgorithm	Option for the <i>IMiSARC</i> archive that determines the type of cryptographic algorithm used in authentication.
OptionAuthCryptoCipherMode	Option for the <i>IMiSARC</i> archive that determines the type of operation with block ciphers in authentication.
OptionAuthCryptoKeySize	Option for the <i>IMiSARC</i> archive that determines the size of the authentication key.
OptionAuthKey	Option for the <i>IMiSARC</i> archive object that specifies the authentication key.
OptionAuthType	Option for the <i>IMiSARC</i> archive that determines the type of authentication.
OptionComputerName	Option for the <i>IMiSARC</i> archive that determines the name of the computer for the audit trail.
OptionMaxSessionsPerUser	Option for the <i>IMiSARC</i> archive that determines the maximum number of sessions per user.
OptionNodes	Option for the <i>IMiSARC</i> archive that specifies any additional archive servers that make up the cluster.
OptionObjectldEncoding	Option for the <i>IMiSARC</i> archive that determines how an object identifier is encoded.
OptionObjectldKind	Option for the the <i>IMiSARC</i> archive object that specifies what kind of (internal/external) object identifiers the program is dealing with.
OptionObjectldKind	Option for the <i>IMiSARC</i> archive object that specifies what kind of (short/long) object identifiers the program is dealing with.
OptionUserName	Option for the <i>IMiSARC</i> archive object that determines the name of the user for the audit trail.
OptionPersistentSessions	Option for the <i>IMiSARC</i> archive object that determines whether sessions should remain active or should close after each use.

.NET : Property	Description
Instance	Returns a singleton instance of the <i>StorageConnector</i> object. The first time the program is used an instance is created. This instance is returned until the <i>FreeInstance</i> method is called up, at which point the singleton instance is no longer valid.
LogHandlers	Returns a list of external logging handlers.
LogInternal	Returns or sets a value that tells the user whether internal logging is performed or not.
LogLevel	Returns or sets the current level of logging.
LogLocale	Returns or sets regional settings for logging.
VersionInfo	Returns the IMiS®/Storage Connector version.

.NET : Method	Description
FreeInstance	Terminates the singleton instance of the <i>StorageConnector</i> object. Once this method is used, calling up the Instance property will not return a valid instance, as this instance no longer exists.
LogAddHandler	Adds a login target to the external login target list.
LogClearHandlers	Empties the external login target list.
LogRemoveHandler	Removes a login target from the external login target list.
OpenContentManagerStorage	Opens an archive for IBM DB2 Content Manager Server. *
OpenContentManagerStorage	Opens an archive for IBM Lotus Domino Document Manager or a Domino.Doc-compatible archive server. *
OpenFileSystemStorage	Opens an archive for a local/remote file system. *
OpenMiSARCStorage	Opens an archive for IMiS®/ARCHive Server 7 (the <i>IMISARC</i> archive) through the provided network address (host name or IP address) and port.
ContentTypeResolver	Makes it possible to get an extension from the content type (MIME) and vice versa.

\* *IMiS®/Storage Connector .NET* does not currently support these features.

Java : Field	Description
MAX_OPTION_NAME_LENGTH	The maximum length of names for the audit trail.
OPTION_APPLICATION_NAME	Option for the <i>IMIS_ARC</i> archive that determines the name of the application for the audit trail.
OPTION_AUTH_CRYPTO_ALGORITHM	Option for the <i>IMIS_ARC</i> archive that determines the type of cryptographic algorithm used in authentication.
OPTION_AUTH_CRYPTO_CIPHERMODE	Option for the <i>IMIS_ARC</i> archive that determines the type of operation with block ciphers in authentication.
OPTION_AUTH_CRYPTO_KEYSIZE	Option for the <i>IMIS_ARC</i> archive that determines the size of the authentication key.
OPTION_AUTH_KEY	Option for the <i>IMIS_ARC</i> archive that specifies the authentication key.
OPTION_AUTH_TYPE	Option for the <i>IMIS_ARC</i> archive that determines the type of authentication.
OPTION_COMPUTER_NAME	Option for the <i>IMIS_ARC</i> archive that determines the name of the computer for the audit trail.
OPTION_MAX_SESSIONS_PER_USER	Option for the <i>IMIS_ARC</i> archive that determines the maximum number of sessions per user.
OPTION_NODES	Option for the <i>IMIS_ARC</i> archive that specifies any additional archive servers that make up the cluster.
OPTION_OBJECT_IDENCODING	Option for the <i>IMIS_ARC</i> archive that determines how an object identifier should be encoded.

Java : Field (cont.)	Description
OPTION_OBJECT_IDKIND	Option for the <i>IMIS_ARC</i> archive that specifies what kind of (internal/external) object identifiers the program is dealing with.
OPTION_OBJECT_IDTYPE	Option for the <i>IMIS_ARC</i> archive that specifies what type of (short/long) object identifiers the program is dealing with.
OPTION_PERSISTENT_SESSIONS	The option name for the <i>IMISARChive</i> archive, which determines whether the sessions should remain active after use or closed after each use.
OPTION_USER_NAME	Option for the <i>IMIS_ARC</i> archive that determines the name of the application for the audit trail.

Java : Method	Description
freeInstance	Terminates the singleton instance of the <i>StorageConnector</i> object. Once this method is used, calling up the <i>getInstance</i> property will not return a valid instance, as this instance no longer exists.
getInstance	Returns a singleton instance of the <i>StorageConnector</i> object. The first time the program is used an instance is created. This instance is returned until the <i>freeInstance</i> method is called up, at which point the singleton instance is longer valid.
getVersionInfo	Returns the IMiS®/Storage Connector version.
logAddHandler	Returns a list of external handlers for logging.
logGetLevel	Returns the current level of logging.
logInternal	Enables or disables internal logging.
logIsInternal	Returns a value that tells the user whether internal logging is performed or not.
logRemoveHandler	Removes the handler from the list of external handlers for logging.
logSetLevel	Sets the level of logging.
openContentManagerStorage	Opens an archive for IBM DB2 Content Manager Server. *
openDocumentManagerStorage	Opens an archive for IBM Lotus Domino Document Manager or a Domino.Doc-compatible archive server. *
openFileSystemStorage	Opens an archive for a local/remote file system. *
openMiSARCStorage	Opens the archive for IMiS®/ARChive Server ( <i>IMIS_ARC</i> ) through the provided network address (host name or IP address) and port.
setMimeExtResolver	Sets an external object for determining an extension from the MIME type and vice versa.

\* *IMiS®/Storage Connector .NET* does not currently support these features.

## 5.2.2 “Storage”

The *Storage* object represents an archive on the client side linked to a specific archive server. It contains operations such as creating, opening, saving, handing off and deleting documents. A message for the audit trail report can also be set for certain objects using the *AuditLog* object (chapter [“Auditlog”](#)). Note that a message must be separately set for each operation.

The Storage object contains the following elements:

.NET : Property	Description
AuditLog	Returns the <i>AuditLog</i> object for setting a message for the audit trail.
Capacity	Returns the size or capacity of the archive in bytes. *
IsClosed	Returns a value that tells the user whether the archive is closed or not.
ObjectCount	Returns the number of documents in the archive. *
SpaceAvailable	Returns the amount of space available in bytes. *
SpaceUsed	Returns the amount of space used in bytes. *
StoreInfo	Returns information about the archive.
StoreType	Returns the type of archive.

.NET : Method	Description
Close	Closes the archive.
CreateObject	Creates a document in the selected profile.
DeleteObject	Deletes a document listed with an identifier from the archive.
GetProfileCapacity	Returns the size of the profile in bytes. *
GetProfileObjectCount	Returns the number of objects in the profile. *
GetProfileSpaceAvailable	Returns the amount of unused space in the profile in bytes. *
GetProfileSpaceUsed	Returns the amount of space used in the profile in bytes. *
MoveObject	Moves a document to the selected profile.
OpenObject	Opens a document in the archive. *
ResolveExternalObjectId	Returns the identifier of a document in the archive associated with an external identifier.
RetrieveObject	Retrieves a document from the archive to a file on the local disk or to the data stream.
SetExternalObjectId	Sets the association between an external identifier and the selected document in the archive.
StoreObject	Saves a document to the archive in the selected profile with the provided MIME type.

\* *IMiS®/Storage Connector .NET does not currently support these features.*

Java : Method	Description
Close	Closes the archive.
createObject	Creates a document in the selected profile.
deleteObject	Deletes a document listed with an identifier from the archive.
getAuditLog	Returns the <i>AuditLog</i> object for setting a message for the audit trail.
getCapacity	Returns the size or capacity of the archive in bytes. *
getProfileCapacity	Returns the size of the profile in bytes. *
getProfileObjectCount	Returns the number of objects in the profile. *
getProfileSpaceAvailable	Returns the amount of unused space in the profile in bytes. *
getProfileSpaceUsed	Returns the amount of space used in the profile in bytes. *
getSpaceAvailable	Returns the amount of unused space in the archive in bytes. *
getSpaceUsed	Returns the amount of space used in the archive in bytes. *
getStoreInfo	Returns information about the archive.

\* *IMiS®/Storage Connector Java does not currently support these features.*

Java : Method (cont.)	Description
getStoreType	Returns the type of archive.
isClosed	Returns a value that tells the user whether the archive is closed or not.
moveObject	Moves a document to the selected profile.
objectCount	Returns the number of documents in the archive. *
openObject	Opens a document in the archive. *
resolveExternalObjectId	Returns the identifier of a document in the archive associated with an external identifier.
retrieveObject	Retrieves a document from the archive to a file on the local disk or to the data stream.
setExternalObjectId	Sets the association between an external identifier and the selected document in the archive.
storeObject	Saves a document to the archive in the selected profile with the provided MIME type.

\* IMiS®/Storage Connector Java does not currently support these features.

### 5.2.3 “Document”

The *Document* object represents an open document in the archive. It contains methods for saving, deleting and closing. Access to the server is enabled through the data stream.

These objects also contain metadata about the document such as an identifier and the size of the document, whether the document was newly created, edited, saved, etc.

The *Document* object contains the following elements:

.NET : Property	Description
AutoSave	Returns or sets a value that tells the user whether the document is automatically saved upon closing or not.
Created	Returns the date and time the document was created. *
DataStream	Returns the document's data stream.
DefaultExtension	Returns the default document extension.
DefaultMime	Returns the document's default MIME type.
Extensions	Returns a list of extensions for the document's MIME type.
Id	Returns the object identifier of the document.
IsClosed	Returns a value that tells the user whether the document is closed or not.
IsModified	Returns a value that tells the user whether the document has been modified or not.
IsNew	Returns a value that tells the user whether the document is newly created or not.
LastAccessed	Returns the date and time the document was last accessed. *
Mimes	Returns a list of MIME types for the document's extension.
Mode	Returns a value that specifies the mode in which the document is open.
Modified	Returns the date and time the document was last modified. *
Size	Returns the size of the document in bytes. *
Store	Returns the archive where the document is located.

.NET : Method	Description
Clone	Creates a copy or clone of the document. *
Close	Closes the document.
Delete	Deletes the document in the archive.
Move	Moves the document to the selected profile. *
Save	Saves the document.

\* IMiS®/Storage Connector .NET does not currently support these features.

Java : Method	Description
clone	Creates a copy or clone of the document. *
close	Closes the document.
delete	Deletes the document in the archive.
getAccessMode	Returns a value that specifies the mode in which the document is open.
getAutoSave	Returns a value that tells the user whether the document is automatically saved upon closing or not.
getCreated	Returns the date and time the document was created. *
getDefaultExtension	Returns the document's default extension.
getDefaultMime	Returns the document's default MIME type.
getExtensions	Returns a list of extensions for the document's MIME type.
getId	Returns the object identifier of the document.
getInputStream	Returns the document's incoming data stream.
getLastAccessed	Returns the date and time the document was last accessed.*
getMimes	Returns a list of MIME types for the document's extension.
getModified	Returns the date and time the document was last modified.*
getOutputStream	Returns the document's outgoing data stream.
getSize	Returns the size of the document in bytes.
getStore	Returns the archive where the document is located.
isClosed	Returns a value that tells the user whether the document is closed or not.
isModified	Returns a value that tells the user whether the document has been modified or not.
isNew	Returns a value that tells the user whether the document is newly created or not.
move	Moves the document to the selected profile.*
save	Saves the document.
getAutoSave	Returns or sets a value that tells the user whether the document is automatically saved upon closing or not.

\* IMiS®/Storage Connector Java does not currently support these features.

## 5.2.4 “AuditLog”

The *AuditLog* object represents a message that can be used in the audit trail for certain operations with documents, including creating, opening, saving, moving and deleting.

The message must be delivered in the form of a C-style string.

The AuditLog object contains the following elements:

.NET : Property	Description
Arguments	Returns or sets arguments for the audit trail message.
Message	Returns or sets the audit trail message.

Java : Method	Description
getArguments	Returns arguments for the audit trail message.
getMessage	Returns the audit trail message.
setArguments	Sets arguments for the audit trail message.
setMessage	Sets the audit trail message.

### 5.3 Interface for IMiS®/ARChive Server 9

IMiS®/ARChive Server 9 introduces a new approach to archiving content using the so-called entity model.

The IMiS®/Storage Connector application program interface (API) for IMiS®/ARChive Server version 9 enables the user to easily connect to and work with archive servers.

It encompasses work with entities, metadata and content through registered archive users.

API is available in .NET and Java versions.

The interface for accessing IMiS®/ARChive Server version 9 is divided into three address spaces:

- *IMiS.StorageConnector* – contains enumerators, folders and interfaces, the most noteworthy of which are the *StorageConnector* class and the *IArchive* interface. The *StorageConnector* class represents the primary object of the IMiS®/Storage Connector interface. The *IArchive* interface represents an archive on the client side that is linked to a specific archive server.

The *IMiS.StorageConnector* address space contains the following elements:

.NET : Delegate	Description
AuthenticatingEventHandler	Defines callback method type for an <i>Authenticating</i> event.
ConnectingEventHandler	Defines callback method type for a <i>Connecting</i> event.



<b>.NET : Enumerator</b>	<b>Description</b>
ArchiveCapabilities	Values representing the capabilities of the archive.
ArchiveFeatures	Values represent supported archive features.
ArchiveType	Values representing the archive type.
AuditQuery.ObjectParamsScope	These values represent different types of restrictions on the range of object parameters when searching the audit trail.
AuditQuery.QueryParamsType	These values represent different types of groupings of parameters when searching the audit trail.
AuditQuery.ResultFilter	These values represent different types of filters for audit trail search results.
AuditQueryResultSortOrder	These values represent different types of sorting orders for audit trail search results.
AuditQuery.SessionParamsScope	These values represent different types of restrictions on the range of session parameters when searching the audit trail.
AuthCryptoAlgorithm	These values represent the type of cryptographic algorithm used when connecting to the archive.
AuthCryptoCipherMode	These values represent the type of block cipher used when connecting to the archive.
AuthCryptoKeySize	These values represent the size of the cryptographic key used when connecting to the archive.
AuthType	These values represent the type of authentication with the archive.

<b>.NET : Enumerator</b>	<b>Description</b>
ConnectingStage	These values represent different stages when connecting to the archive.
ConnectionProtocol	These values represent protocols when connecting to the archive.
LocalCertificatesStore	These values represent locations of local certificates when connecting to the archive.

<b>.NET : Class</b>	<b>Description</b>
AuditLog	Enables a message to be set for the audit trail.
AuditQuery	Enables parameters to be set for the audit trail.
AuthenticatingEventArgs	Defines parameters of <i>Authenticating</i> event
ConnectingEventArgs	Defines parameters of <i>Connecting</i> event.
StorageConnector	Enables archives to be opened and logging to be configured.
StorageConnectorException	Error running IMiS®/Storage Connector.

<b>.NET : Interface</b>	<b>Description</b>
IArchive	Defines operations on the archive.
IContentTypeResolver	Defines operations for getting an extension from the content type (MIME) and vice versa.

Java : Enumerator	Description
ArchiveCapabilities	Values represent the archive capabilities.
ArchiveFeatures	Values represent supported archive features.
ArchiveType	Values represent the type of archive.
AuditQuery.ObjectParamsScope	Values represent different types of limitations of the scope of parameters for objects when searching in the audit trail.
AuditQuery.QueryParamsType	Values represent different types of grouping parameters when searching in the audit trail.
AuditQuery.ResultFilter	Values represent different result filters when searching in the audit trail.
AuditQuery.ResultSortOrder	Values represent different sorting types of search results in the audit trail.
AuditQuery.SessionParamsScope	Values represent different types of limitations of the scope of parameters for sessions when searching in the audit trail.
AuthCryptoAlgorithm	Values represent a type of cryptographic algorithm used to connect to the archive.
AuthCryptoCipherMode	Values represent a type of block encryption used to connect to the archive.
AuthCryptoKeySize	Values represent the size of a cryptographic key used to connect to the archive.
AuthType	Values represent the type of authentication with the archive.
ConnectingStage	Values represent various stages of connecting to the archive.
ConnectionProtocol	Values represent connection protocols to the archive.

Java : Class	Description
AuditLog	Enables specifying a message for the audit trail.
AuditQuery	Enables specifying parameters of the audit trail.
AuthenticatingEvent	Specifies parameters of an <i>Authenticating</i> event.
ConnectingEvent	Specifies parameters of a <i>Connecting</i> event.
StorageConnector	Enables opening of archives and login setup.
StorageConnectorException	Error during execution of IMiS®/Storage Connector interface.

Java : Interface	Description
IArchive	Defines archive operations.
IAuthenticatingListener	Defines callback methods for an <i>Authenticating</i> event.
IConnectingListener	Defines type of callback method for a <i>Connecting</i> event.
IContentTypeResolver	Defines operations to obtain extensions from the content type (MIME) and vice versa.

- IMiS.StorageConnector.EntityModel* contains enumerators, classes and interfaces for the entity model used in IMiS®/ARCHIVE Server version 9. *IClass*, *IFolder* and *IDocument* represent the different types of entities in the archive (class, folder and document). The *IEntityStub* interface represents publicly available metadata for an individual entity. The *IProperty* interface represents an individual piece of entity metadata. The *IContent* interface represents the content of a document in the form of a file available through the *IContentPart* interface.

The *IMiS.StorageConnector.EntityModel* address space contains the following elements:

<b>.NET : Enumerator</b>	<b>Description</b>
AccessMode	These values represent types of archive access.
ContentPartActions	These values represent different actions with the entity's content.
ContentPartIdEncoding	These values represent different encodings of the entity's content identifiers.
ContentPartIdKind	These values represent different types of the entity's content identifiers.
DeletionKind	These values represent a type of deletion.
EntityAccess	These values represent types of access to the archive.
EntityIdEncoding	These values represent various encodings of entity identifiers.
EntityIdKind	These values represent various kinds of entity identifiers.
EntityIdType	These values represent various types of entity identifiers.
EntityQueryScope	These values represent the various types of data about an entity the user would like to obtain.
EntityRightsFilter	These values represent filters for rights to entities.
EntitySortKeyDirection	These values represent the direction in which entities are sorted by keys.
EntityType	These values represent the entity types (class, folder or document).
EntityTypeFilter	These values represent various filters for entity types.
LogType	These values represent various system directories for exported, imported and transferred entities.
PropertyType	These values represent various property types for a piece metadata.
ReportType	These values represent various types of reports.
RetentionEntryFilter	These values represent various retention filters based on the type of entity.
RetentionEntryScope	These values represent various retention scopes based on the type of entity
SearchOptions	These values represent various options for searching.
SystemProperty	These values represent various system metadata.

<b>.NET : Class</b>	<b>Description</b>
ACLFilterItem	A filter for user rights.
EntityFilter	Enables filtration parameters to be set.
EntityFilterItem	Represents the basis for individual filters.
EntitySortKey	Represents a key for sorting entity collections.

<b>.NET : Interface</b>	<b>Description</b>
IACL	Represents the ACL (Access Control List), a collection of user rights for a specific entity.
IBinaryValue	Represents binary content for metadata.
IClass	Represents a class in the classification scheme in the archive.
IContent	Enables the reading and editing of entity file content.
IContentPart	Represents the content of an entity in the form of a file.
IDeletionStub	Represents the metadata of a deleted entity.
IDispositionHold	Represents the definition of disposition hold.
IDispositionHoldEntry	Represents an entry for entity disposition hold.
IDocument	Represents a document in a class or folder in the archive.
IEmailEntity	Enables access to email metadata.
IEntity	Represents an entity in the classification scheme in the archive.
IEntityACLEntry	Represents user rights for an entity.
IEntityRights	Enables the viewing and editing of user rights for an entity.
IEntityStub	Represents publicly available metadata about an entity.

<b>.NET : Interface (cont.)</b>	<b>Description</b>
IFolder	Represents a folder in a class or folder in the archive.
IMoveDetails	Enables access to the metadata of a moved entity.
IPhysicalEntity	Enables access to physical entity metadata.
IPickListValue	Represents a value for metadata with predefined valid values.
IProperty	Enables the reading and editing of metadata.
IPropertyACLEntry	Represents user rights for metadata.
IPropertyRights	Enables the viewing and editing of user rights for metadata.
IRDSEntry	Represents user-related data about retention and disposition.
IRDSList	Represents a data collection about retention and disposition for an entity.
IReadOnlyContent	Enables the reading of entity file content.
IReadOnlyEntityRights	Enables the viewing of user rights for an entity.
IReadOnlyProperty	Represents read-only metadata.
IReadOnlyPropertyRights	Enables the viewing of user rights for metadata.
IReadOnlyRetentionPolicyContext	Represents the entry context for read only entity retention policy.
IRetention	Represents entry collections for retention policy and entity disposition hold.
IRetentionPolicy	Represents the definition of retention policy.
IRetentionPolicyContext	Represents retention policy context for entity retention policy.
IRetentionPolicyEntry	Represents the entry for entity retention policy.
IRetentionPolicySnapshot	Represents a retention policy setting at the exact time of review preparation of disposition actions.
IReview	Represents the review process of disposition actions.
IReviewStub	Represents publicly available metadata for review process of disposition actions.
ISearchedEntityStub	Represents metadata of a searched entity.
ISecurityClassChangeDetails	Enables access to data on changes made to the security class of an entity.
IStringMaxValue	Represents text content for metadata.
ITemplate	Represents a template for entity creation.
ITransferDetails	Enables access to the metadata of a transferred entity.

<b>Java : Enumerator</b>	<b>Description</b>
AccessMode	Values represent the means of access to the archive.
ContentPartActions	These values represent different actions with the entity's content.
ContentPartIdEncoding	These values represent different encodings of the entity's content identifiers.
ContentPartIdKind	These values represent different types of the entity's content identifiers.
DeletionKind	Values represent the kind of deletion.
EntityIdEncoding	Values represent different entity identifier coding.
EntityIdKind	Values represent different kinds of entity identifiers.
EntityIdType	Values represent different types of entity identifiers.
EntityQueryScope	Values represent different types of entity data that we wish to obtain.
EntityRightsFilter	Values represent filters for entity rights.
EntitySortKeyDirection	Values represent the sorting direction of entity collections by keys.
EntityType	Values represent different types of entities (class, folder or document).
EntityTypeFilter	Values represent different entity type filters.
LogType	Values represent different system folders for exported, imported and transferred entities.
PropertyType	Values represent different types of metadata values.
ReportType	Values represent different types of reports.
RetentionEntryFilter	Values represent different selection filters for entity types.

Java : Enumerator (cont.)	Description
RetentionEntryScope	Values represent different selection scopes for entity types.
SearchOptions	Values represent different search options.
SystemProperty	Values represent different system metadata.

Java : Class	Description
ACLFilterItem	Represents a filter for user rights.
EntityFilter	Enables the setting of filter parameters.
EntityFilterItem	Represents the basis for individual filters.
EntitySortKey	Represents the key for sorting entity collections.

Java : Interface	Description
IACL	Represents ACL (Access Control List), a collection of user rights over the entity.
IBinaryValue	Represents the binary content of metadata.
IClass	Represents a class in the classification tree in the archive.
IContent	Enables reading and editing file contents of the entity.
IContentPart	Represents the contents of the entity in the form of a file.
IDeletionStub	Represents the metadata of a deleted entity.
IDispositionHold	Represents the definition of a disposition hold.
IDispositionHoldEntry	Represents an entry for an entity disposition hold.
IDocument	Represents a document in a class or folder in the archive.
IEmailEntity	Enables access to e-mail metadata.
IEntity	Represents an entity in the classification tree in the archive.
IEntityACLEntry	Represents user rights over the entity.
IEntityRights	Enables reading and modifying entity rights.
IEntityStub	Represents publicly accessible entity metadata.
IFolder	Represents a folder in a class or folder in the archive.
IMoveDetails	Enables access to the metadata of a moved entity.
IPhysicalEntity	Enables access to the metadata of physical materials.
IPickListValue	Represents the value for metadata with specified valid values.
IProperty	Enables reading and editing of metadata.
IPropertyACLEntry	Represents user rights over metadata.
IPropertyRights	Enables reading and modifying user metadata rights.
IRDSEntry	Represents data on the review process bound to the user.
IRDSList	Represents a collection of data on the entity review process.
IReadOnlyContent	Enables reading of entity file content.
IReadOnlyEntityRights	Enables reading of rights over the entity.
IReadOnlyProperty	Represents read-only metadata.
IReadOnlyPropertyRights	Enables reading of user rights over metadata.
IReadOnlyRetentionPolicyContext	Represents the entry context for the retention policy of read-only entity.
IRetention	Represents an entry collection for the retention policy and disposition hold of the entity.
IRetentionPolicy	Represents the definition of the retention policy.
IRetentionPolicyContext	Represents the entry context for the entity retention policy.
IRetentionPolicyEntry	Represents the entry for the entity retention policy.
IRetentionPolicySnapshot	Represents the retention policy setting at the time of preparation of the review process.
IReview	Represents a review in the review process.

Java : Interface (cont.)	Description
IReviewStub	Represents a review of publicly accessible metadata in the review process.
ISearchedEntityStub	Represents the metadata of the searched entity.
ISecurityClassChangeDetails	Enables access to data on entity security class change.
IStringMaxValue	Represents textual content for metadata.
ITemplate	Represents a template for entity creation.
ITransferDetails	Enables access to the transferred metadata of the entity.

- *IMiS.StorageConnector.Services* contain enumerators, classes and interfaces for services enabled by IMiS®/ARChive Server version 9.

The *IDirectory* interface makes it possible to obtain information on registered archive users. The *IDirectoryEntity* represents an archive “user”. The user can be a group or an individual user.

The *IMiS.StorageConnector.Services* address space contains the following elements:

.NET : Enumerator	Description
DirectoryEntityType	Values that represent the archive user type (user group or individual user).

.NET : Class	Description
Discovery	Enables searching in archives above the archive server.

.NET : Interface	Description
IArchiveDescriptor	Represents a description of the archive above the archive server.
IDirectory	Makes it possible to obtain information on registered archive users.
IDirectoryEntity	Represents a registered archive user.

Java : Enumerator	Description
DirectoryEntityType	Values represent the user type of the archive (user group or individual user).

Java : Class	Description
Discovery	Enables to search for archives on the archive server.

Java : Interface	Description
IArchiveDescriptor	Represents an archive description of the archive server.
IDirectory	Enables the obtainment of information on registered users of the archive.
IDirectoryEntity	Represents a registered user of the archive.

A detailed description of the IMiS®/ARChive Server version 9 components outlined above is presented below.

### 5.3.1 “StorageConnector”

*StorageConnector* is the primary object of the IMiS®/Storage Connector application program interface (API). Access to the singleton object instance is managed through the *Instance* property, which is only valid until the *FreeInstance* method is called up. This object contains the *OpenArchive* method for opening the archive on the client side (chapter ["IArchive"](#)) for different archive servers.

At the time of writing, only IMiS®/ARChive Server is supported. This object also supports logging settings and contains constants representing the names of different options which are delivered together with the suitable values when opening an archive.

Below the archive to IMiS®/ARChive Server is marked with the prefix *IMiSARChive*, which is equivalent to the *ArchiveType* value in the interface.

The *StorageConnector* object contains the following elements:

.NET : Constant	Description
MAX_OPTION_NAME_LENGTH	The maximum length of names for the audit trail.
OptionApplicationName	The name of the option for the <i>IMiSARChive</i> archive that determines the name of the application for the audit trail.
OptionAuthCryptoAlgorithm	The name of the option for the <i>IMiSARChive</i> archive that determines the type of cryptographic algorithm used in authentication.
OptionAuthCryptoCipherMode	The name of the option for the <i>IMiSARChive</i> archive that determines the type of operation with block ciphers in authentication.
OptionAuthCryptoKeySize	The name of the option for the <i>IMiSARChive</i> archive that determines the size of the authentication key.
OptionAuthKey	The name of the option for the <i>IMiSARChive</i> archive object that determines the authentication key.
OptionAuthType	The name of the option for the <i>IMiSARChive</i> archive that determines the type of authentication.
OptionAuthTypeDisposition	The name of the option for the <i>IMiSARChive</i> archive that determines the preference by selecting the type of authentication.
OptionComputerName	The name of the option for the <i>IMiSARChive</i> archive that determines the name of the computer for the audit trail.
OptionContentPartIdEncoding	The name of the option for the <i>IMiSARChive</i> archive that specifies how the entity's content identifier should be encoded.
OptionContentPartIdType	The name of the option for the <i>IMiSARChive</i> archive that specifies with which type (short/long) of entity's content identifier we are dealing with.
OptionDiscoveryArchiveTypes	The name of the option to search for archives of a particular type.
OptionDiscoveryHint	The name of the option to search for an archive via a network address.
OptionEntityCollectionPageCount	The name of the option for the <i>IMiSARChive</i> archive that determines the number of pages in entity collections.

<b>.NET : Constant (cont.)</b>	<b>Description</b>
OptionEntityCollectionPageSize	The name of the option for the <i>IMiSARChive</i> archive that determines the number of entities per page in entity collections.
OptionEntityIdEncoding	The name of the option for the <i>IMiSARChive</i> archive that determines how an object identifier is encoded.
OptionEntityIdType	The name of the option for the <i>IMiSARChive</i> archive that specifies what kind of (short/long) object identifiers the program is dealing with.
OptionKerberosKDC	The name of the option for the <i>IMiSARChive</i> archive that determines Kerberos Key Distribution Center (KDC).
OptionKerberosRealm	The name of the option for the <i>IMiSARChive</i> archive that determines the Kerberos Realm.
OptionKerberosSPN	The name of the option for the <i>IMiSARChive</i> archive that determines the name of Kerberos Service Principal Name (SPN).
OptionKerberosTicket	The name of the option for the <i>IMiSARChive</i> archive that determines the Kerberos Service Ticket.
OptionLocalAddress	The name of the option for the <i>IMiSARChive</i> archive that determines the local IP address of the user for the audit trail.
OptionLocalCertificate	The name of the option for <i>IMiSARChive</i> , which specifies a local certificate to establish a secure connection between client and server.
OptionMaxSessionsPerUser	The name of the option for the <i>IMiSARChive</i> archive that determines the maximum number of sessions per user.
OptionPersistentSessions	The name of the option for <i>IMiSARChive</i> , which specifies whether sessions should remain active or should close after each use.
OptionUserName	The name of the option for the <i>IMiSARChive</i> archive object that determines the name of the user for different authentication types and/or for the audit trail.
OptionUserPassword	The name of the option for the <i>IMiSARChive</i> archive object that determines the user password for different authentication types.
OptionImpersonalizationUserName	The name of the option for the <i>IMiSARChive</i> that determines which user the authenticated and established session should impersonalize. The authenticated user is presented to the server as a delegate of the above-mentioned user, if he has the proper authorizations.
OptionMaxIOPayloadSize	The name of the option for the <i>IMiSARChive</i> that determines the maximum size of useful data in a single network packet in archival traffic.

<b>.NET : Property</b>	<b>Description</b>
ContentTypeResolver	Returns the predefined interface for getting an extension from the content type (MIME) and vice versa.
CustomContentTypeResolver	Returns or sets a custom interface for getting an extension from the content type (MIME) and vice versa.
Instance	Returns a singleton instance of the <i>StorageConnector</i> object. The first time the program is used an instance is created. This instance is returned until the <i>FreeInstance</i> method is called up, at which point the singleton instance is no longer valid.
LogHandlers	Returns a list of external logging handlers.
LogInternal	Returns or sets a value that tells the user whether internal logging is performed or not.
LogLevel	Returns or sets the current level of logging.
LogLocale	Returns or sets regional settings for logging.
VersionInfo	Returns the IMiS®/Storage Connector version.



.NET : Method	Description
FreeInstance	Terminates the singleton instance of the <i>StorageConnector</i> object. Once this method is used, calling up the <i>Instance</i> property will not return a valid instance, as this instance no longer exists.
LogAddHandler	Adds a logging handler to the list of external logging handlers.
LogClearHandlers	Clears the list of external logging handlers.
LogRemoveHandler	Removes the logging handler from the list of external logging handlers.
OpenArchive	Opens the archive for IMiS®/ARChive Server (the <i>IMiSARC</i> archive) through the provided network address (host name or IP address) and port.

Java : Constant	Description
MAX_OPTION_NAME_LENGTH	Represents the maximum name length for the audit trail.
OPTION_APPLICATION_NAME	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the application name for the audit trail.
OPTION_AUTH_CRYPTO_ALGORITHM	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the type of cryptographic algorithm used in authentication.
OPTION_AUTH_CRYPTO_CIPHERMODE	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the type of operation with cryptographic algorithm blocks in authentication.
OPTION_AUTH_CRYPTO_KEYSIZE	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the size of the authentication key.
OPTION_AUTH_KEY	The name of the option for <i>IMIS_ARCHIVE object</i> , which specifies the authentication key.
OPTION_AUTH_TYPE	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the authentication type.
OPTION_AUTH_TYPE_DISPOSITION	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the authentication type selection preference.
OPTION_COMPUTER_NAME	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the computer name for audit trail.
OPTION_CONTENT_PART_IDENCODING	The option name for the <i>IMiSARChive</i> archive that specifies how the entity's content identifier should be encoded.
OPTION_CONTENT_PART_IDTYPE	The option name for the <i>IMiSARChive</i> archive that specifies with which type (short/long) of entity's content identifier we are dealing with.
OPTION_DISCOVERY_ARCHIVETYPES	The name of the option to search for a particular archive type.
OPTION_DISCOVERY_HINT	The name of the option to search for an archive via a network address.
OPTION_ENTITY_IDENCODING	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies how to code the entity identifier.
OPTION_ENTITY_IDTYPE	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies with what type (short/deal) of entity identifiers we are dealing with.
OPTION_ENTITYCOLLECTION_PAGECOUNT	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the number of pages in the entity collections.
OPTION_ENTITYCOLLECTION_PAGESIZE	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the number of entities per page in entity collections.
OPTION_KERBEROS_KDC	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the Kerberos Key Distribution Center (KDC).
OPTION_KERBEROS_REALM	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the Kerberos realm.
OPTION_KERBEROS_SPN	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the Kerberos Service Principal Name (SPN).
OPTION_KERBEROS_TICKET	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the Service ticket for Kerberos.
OPTION_LOCAL_ADDRESS	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the user's local IP address for the audit trail.
OPTION_LOCAL_CERTIFICATE	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies a local certificate to establish a secure connection between client and server.

Java : Constant (cont.)	Description
OPTION_MAX_SESSIONS_PER_USER	The name of the option for <i>IMIS_ARCHIVE</i> , which specifies the maximum number of sessions per user.
OPTION_PERSISTENT_SESSIONS	The name of the option for <i>IMiSARChive</i> , which specifies whether sessions should remain active or should close after each use.
OPTION_IMPERSONALIZATION_USER_NAME	The name of the option for the <i>IMIS_ARCHIVE</i> that determines which user the authenticated and established session should impersonalize. The authenticated user is presented to the server as a delegate of the above-mentioned user, if he has the proper authorizations.
OPTION_MAX_IO_PAYLOAD_SIZE	The name of the option for the <i>IMIS_ARCHIVE</i> that determines the maximum size of useful data in a single network packet in archival traffic.
OPTION_USER_NAME	The name of the option for <i>IMiSARChive</i> , which specifies the username in different authentication types and/or for the audit trail.
OPTION_USER_PASSWORD	The name of the option for <i>IMiSARChive</i> , which specifies the user's password in different authentication types.

Java : Method	Description
freeInstance	Terminates the »singleton« instance of a <i>StorageConnector</i> object. After using this method, the call of »Instance's« properties do not return a valid instance because it no longer exists.
getContentResolver	Returns a predefined interface to obtain extensions from the content type (MIME) and vice versa.
getCustomContentResolver	Returns or sets a customized interface to obtain extensions from the content type (MIME) and vice versa.
getInstance	Returns a »singleton« instance of a <i>StorageConnector</i> object. On first use the instance is created, and later the same instance is returned until the call of the <i>FreeInstance</i> method, when it becomes invalid.
getVersionInfo	Returns the version of IMiS®/Storage Connector.
logAddHandler	Adds a logging handle to the list of external logging handles.
logGetLevel	Returns the current logging level.
logInternal	Returns or sets a value that indicates whether internal logging is carried out or not.
logIsInternal	Returns a value that indicates whether internal logging is carried out or not.
logRemoveHandler	Removes a logging handle from the list of external logging handles.
logSetLevel	Sets the current logging level.
openArchive	Opens the archive for the IMiS®/ARChive Server ( <i>IMIS_ARCHIVE</i> archive) via a specified network address (host name or IP address), network port and selected options.
setCustomContentResolver	Sets a customized interface to obtain extensions from the content type (MIME) and vice versa.

### 5.3.2 “IArchive”

The *IArchive* interface represents an archive on the client side that is linked to an archive server. It contains the following operations: creating and opening entities (classes, folders and documents), getting the audit trail through the *AuditLogQuery* method and archive search using the *Search* method. A message for the audit trail report can also be set for certain operations using the *AuditLog* object (chapter "[Auditlog](#)"). Note that a message must be separately set for each operation.

The *IArchive* interface has the following elements:

<b>.NET : Events</b>	<b>Description</b>
Authenticating	Triggers when authenticating on the archive.
Connecting	Triggers when connecting to the archive.

<b>.NET : Property</b>	<b>Description</b>
AuditLog	Returns the <i>AuditLog</i> object for setting a message for the audit trail.
Directory	Returns the <i>IDirectory</i> object for identifying archive users.
DispositionHolds	Returns the collection of all disposition holds on the archive.
EffectiveRights	Returns the effective rights of the user on the root archive.
EntityCollectionPageCount	Returns or sets the number of pages in an entity collection.
EntityCollectionPageSize	Returns or sets the page size in an entity collection.
Host	Returns network address (host name or IP address) and port.
IsClosed	Returns a value that tells the user whether the archive is closed or not.
RetentionPolicies	Returns the collection of all retention policies on the archive.
Template	Returns a collection of all entity templates in the archive
User	Returns the user name of the user currently logged in.

<b>.NET : Method</b>	<b>Description</b>
AuditLogQuery	Performs an action that gets the audit trail.
Authenticate	Authenticates the archive user.
Close	Closes the archive.
CreateClass	Creates a class on the root archive or in the selected class.
CreateDocument	Creates a document in the selected class or folder.
CreateEntity	Creates an entity in the selected entity.
CreateEntityReference	Creates a reference.
CreateFolder	Creates a folder in the selected class or folder.
CreateReview	Creates a review of disposition actions.
DeleteEntity	Deletes an entity listed with an entity identifier from the archive.
GetDeletedEntities	Returns a collection of deleted entities.
GetDeletedEntity	Returns a deleted entity.
GetDrafts	Returns a collection of drafts on the archive.
GetEntityInfo	Returns public data about one or more entities listed with their identifiers.
GetEntityReference	Returns reference.
GetLogEntities	Returns a collection of entities from the selected system directory.
GetPublicClassificationCode	Returns public form from the inherited canonical classification code.
GetReport	Returns the selected type of report.
GetReviewInfo	Returns public data on review of disposition actions.
GetReviews	Returns a review of disposition actions.
GetRootClasses	Returns a collection of classes on the root archive.
GetSystemPropertyName	Returns the name of the selected system property.
GetSystemPropertySortKey	Returns a sorting key for the selected system property for editing entity collections.
MoveEntity	Moves an entity to the selected parent entity.
OpenClass	Opens a class in the archive.
OpenDocument	Opens a document in the archive.
OpenEntity	Opens an entity in the archive.
OpenFolder	Opens a folder in the archive.
OpenReview	Opens a review of disposition actions.

.NET : Method (cont.)	Description
Properties	Returns a collection of the archive properties.
Search	Performs a search of the archive.
SetEntitySecurityClass	Sets the security class of an entity.
SetEntityStatus	Sets the status of an entity.

Java : Method	Description
addAuthenticatingListener	Adds a callback method to an <i>Authenticating</i> even.
addConnectingListener	Adds a callback method to a <i>Connecting</i> event.
auditLogQuery	Executes the action of obtaining the audit trail.
close	Closes the archive.
createClass	Creates a class at the root of the archive or in the selected class.
authenticate	Authenticates the archive user.
createDocument	Creates a document in the selected class or folder.
CreateEntity	Creates an entity in the selected entity.
CreateEntityReference	Creates a reference.
createFolder	Creates a folder in the selected class or folder.
createReview	Creates a review of the review processes.
deleteEntity	Deletes the identifier specified entity from the archive.
getAuditLog	Returns an <i>AuditLog</i> object to set the message for the audit trail.
getDeletedEntities	Returns a collection of deleted entities.
GetDeletedEntity	Returns a deleted entity.
getDirectory	Returns an <i>IDirectory</i> object for identifying the users of the archive.
getDispositionHolds	Returns a collection of all disposition holds in the archive.
getDrafts	Returns a collection of drafts on the archive.
getEffectiveRights	Returns effective rights of the user at the root of the archive.
getEntityCollectionPageCount	Returns page count in the entity collection.
getEntityCollectionPageSize	Returns page size in the entity collection.
getEntityInfo	Returns public data on one or more identifier specified entities.
getEntityReference	Returns a reference.
getHost	Returns the network address (host name or IP address) and port.
getLogEntities	Returns a collection of entities of the selected system folder.
getProperties	Returns a collection of the archive properties.
getPublicClassificationCode	Returns a public form from a canonical form of the relayed classification code.
getReport	Returns a selected report type.
getRetentionPolicies	Returns a collection of all retention policies in the archive.
getReviewInfo	Returns public information on the review in the review process.
getReviews	Returns a collection of reviews in the review process.
getRootClasses	Returns a collection of classes at the root of the archive.
getSystemPropertyName	Returns the name of the system properties for the selected system property.
getSystemPropertySortKey	Returns a sorting key for the selected system property for editing entity collections.
getTemplates	Returns a collection of all entity templates in the archive.
getUser	Returns the name of the currently logged user.
isClosed	Returns the value that indicates whether the archive is closed or not.
moveEntity	Moves the entity in the chosen parent entity.
openClass	Opens a class in the archive.
openDocument	Opens a document in the archive.
openEntity	Opens an entity in the archive.

Java : Method (cont.)	Description
openFolder	Opens a folder in the archive.
openReview	Opens a review in the review process.
removeAuthenticatingListener	Removes the callback method of an <i>Authenticating</i> event.
removeConnectingListener	Removes the callback method of a <i>Connecting</i> event.
Search	Performs a search in the archive.
setEntityCollectionPageCount	Sets a page count in the entity collection.
setEntityCollectionPageSize	Sets a page size in the entity collection.
setEntitySecurityClass	Sets the security class of the entity.
setEntityStatus	Sets the status of the entity.

### 5.3.3 “IDirectory”, “IDirectoryEntity” and “IUserProfile”

The *IDirectory* interface represents a service for identifying registered archive users. Registered users are presented through the *IDirectoryEntity* interface, which is uniquely defined through the *Subject* property. The user profile of the current user is presented through the *IUserProfile* interface. This service is available for authenticated archive users.

The *IDirectory* interface contains the following elements:

.NET : Property	Description
InvalidDirectoryEntity	Returns an invalid user.
Members	Returns all registered archive users.
Parent	Returns a reference to the archive.

.NET : Method	Description
GetGroupMembers	Returns all registered archive users for the selected group.
GetUserProfile	Returns a user's profile.

Java : Method	Description
getGroupMembers	Returns all the registered users of the archives for the selected group.
getInvalidDirectoryEntity	Returns an invalid user.
getMembers	Returns all the registered users of the archive.
getParent	Returns a reference to the archive.
getUserProfile	Returns a user's profile.

The *IDirectoryEntity* interface contains the following elements:

.NET : Property	Description
Description	Returns a description of the user.
Email	Returns a user's email address.
FirstName	Returns a user's first name.
IsDeleted	Returns a value that indicates whether the user is deleted.
IsEnabled	Returns a value that indicates whether the user is active.
LastName	Returns a user's last name.

<b>.NET : Property (cont.)</b>	<b>Description</b>
SecurityClass	Returns a user's assigned security class.
Subject	Returns a unique user identifier.
Type	Returns the type of user (user group or individual user).

<b>Java : Method</b>	<b>Description</b>
getDescription	Returns the description of the user.
getEmail	Returns the e-mail address of the user.
getFirstName	Returns the first name of the user.
getIcon	Returns the icon of the user.
getLastName	Returns the last name of the user.
getSecurityClass	Returns the security class that belongs to the user.
getSubject	Returns the unique identifier of the user.
getType	Returns the type of the user (user group or individual user).
isDeleted	Returns the value that indicates whether the user is deleted.
isEnabled	Returns the value that indicates whether the user is active.

The *IUser Profile* contains the following elements:

<b>.NET : Properties</b>	<b>Description</b>
Description	Returns or sets a description of the user.
Email	Returns or sets a user's email address.
FirstName	Returns or sets a user's first name.
Icon	Returns a user's icon.
IsDeleted	Returns a value that indicates whether the user is deleted.
IsDescriptionEditable	Returns a value that indicates whether a user's description is editable.
IsEmailEditable	Returns a value that indicates whether a user's email is editable.
IsFirstNameEditable	Returns a value that indicates whether a user's first name is editable.
IsIconEditable	Returns a value that indicates whether a user's icon is editable.
IsLastNameEditable	Returns a value that indicates whether a user's last name is editable.
IsEnabled	Returns a value that indicates whether a user is active.
LastName	Returns a user's last name.
SecurityClass	Returns a user's assigned security class.
Subject	Returns a unique user identifier.

<b>.NET : Method</b>	<b>Description</b>
ChangePassword	Enables a password change.
Save	Saves a user's profile.
SetIconData	Sets a user's icon.

<b>Java : Method</b>	<b>Description</b>
changePassword	Enables a password change.
getDescription	Returns the description of the user.
getEmail	Returns the e-mail address of the user.
getFirstName	Returns the first name of the user.
getIcon	Returns the icon of the user.
getLastName	Returns the last name of the user.
getSecurityClass	Returns the security class that belongs to the user.

Java : Method (cont.)	Description
getSubject	Returns a unique user identifier.
isDescriptionEditable	Returns a value that indicates whether a user's description is editable.
isEmailEditable	Returns a value that indicates whether a user's email is editable.
isFirstNameEditable	Returns a value that indicates whether a user's first name is editable.
isIconEditable	Returns a value that indicates whether a user's icon is editable.
isLastNameEditable	Returns a value that indicates whether a user's last name is editable.
save	Saves a user's profile.
setDescription	Sets a user's description.
setEmail	Sets a user's email.
setFirstName	Sets a user's first name.
setIconData	Sets a user's icon.
setLastName	Sets a user's last name.

### 5.3.4 "IEntityStub"

The *IEntityStub* interface represents publicly available data on an individual entity. These data include the title (the *Title* property), the classification code (the *ClassificationCode* property), a collection of public metadata obtained through the *Properties* property, and methods such as *Open* for opening an entity in read-only or read and write mode and *Search* for searching sub-entities.

The *IEntityStub* interface contains the following elements:

.NET : Property	Description
Accessed	Returns the date and time the entity was last accessed.
Archive	Returns a reference to the archive.
Categories	Returns a collection of the categories.
ClassificationCode	Returns the classification code in canonicalized form.
Closed	Returns the date and time the entity status was changed to Closed.
Contents	Returns the entity's content collection.
Created	Returns the date and time the entity was created.
Creator	Returns the author of the entity.
Description	Returns a description of the entity.
DraftCreator	Returns the author of the draft.
DraftId	Returns the internal identifier of the draft.
EffectiveRights	Returns the effective rights of the current user on the entity.
ExternalIds	Returns a list of external identifiers of the entity.
HasAIP	Returns the value that indicates whether an archival information package is present for the entity.
HasDraft	Returns a value that indicates whether the entity has draft.
HasReference	Returns a value that indicates whether the entity has references.
HasVersions	Returns a value that indicates whether the entity has versions.
Id	Returns the entity's internal identifier.
IsChildClassificationCodeGenerated	Returns a value that tells the user whether classification codes are automatically generated for child or sub-entities or not.

<b>.NET : Property (cont.)</b>	<b>Description</b>
IsDraft	Returns the value that indicates whether the entity is draft.
IsPermanent	Returns the value that indicates if the entity in the archive is in permanent retention.
Keywords	Returns a collection of keywords for the entity.
Modified	Returns the date and time the entity was last modified.
ModifiedBy	Returns the last entity modifier.
Opened	Returns the date and time the entity's status was changed to Opened.
Owner	Returns the owner of the entity.
Parent	Returns the parent entity.
Properties	Returns a collection of metadata.
PublicClassificationCode	Returns the classification code in public form.
Reference	Returns the collection of references.
Retention	Returns the collection of retention policies and disposition holds.
SecurityClass	Returns the security class of the entity. The following values are possible: <ul style="list-style-type: none"> <li>- Unclassified: there are no special restrictions on accessing the entity.</li> <li>- Restricted: the entity is internal in nature. Only users with a Restricted security class or higher may access the entity.</li> <li>- Confidential: the entity is confidential in nature. Only users with a Confidential security class or higher may access the entity.</li> <li>- Secret: the entity is secret in nature. Only users with a Secret security class or higher may access the entity.</li> <li>- Top Secret: the entity is top secret. Only users with a Top Secret security class or higher may access the entity.</li> </ul>
Significance	Returns the significance of the entity. The following values are possible: <ul style="list-style-type: none"> <li>- Vital: the entity is of vital importance.</li> <li>- Permanent: the entity is permanent.</li> <li>- Retain: the entity is marked for retention.</li> <li>- Delete: the entity is marked for deletion.</li> </ul>
Status	Returns the status of the entity (of a class or a folder or of a document located directly below a class). The following values are possible: <ul style="list-style-type: none"> <li>- Opened: a user may edit the entity provided they have adequate rights (write rights).</li> <li>- Closed: users can no longer edit the entity.</li> </ul>
SubEntityCount	Returns the absolute number of sub-entities.
SubEntityTemplates	Returns a collection of templates for creating sub-entities.
SystemProperties	Returns a collection of system properties.
Template	Returns the template used to create the entity.
Title	Returns the title of the entity.
Type	Returns the type of entity.
VersionComment	Returns the comment of the version.
VersionLabel	Returns the label of the version.
Versions	Returns a collection of versions.
VersionSequence	Returns a sequence number of the version.



<b>.NET Method</b>	<b>Description</b>
AreValuesInherited	Returns a value that specifies whether the values of the entity's system property are inherited or not.
Delete	Deletes the entity.
CheckIn	Creates a new version of the entity from a draft.
CheckOut	Creates a draft entity.
Delete	Deletes the entity.
GetPickListValues	Returns a list of predefined values for the entity's system properties.
GetReport	Returns the selected report type.
GetRetention	Returns a collection of retention policies and disposition holds.
GetSubEntities	Returns a collection of subordinated entities according to the selected filter and editing keys.
GetSystemProperty	Returns a system property.
Move	Moves the entity under the selected parent entity.
Open	Opens the entity in the selected mode (read or edit).
Search	Performs search under the entity.
SetSecurityClass	Sets security class of the entity.
SetStatus	Sets the status of the entity.

<b>Java: Method</b>	<b>Description</b>
accessed	Returns the date and time of last access to the entity.
areValuesInherited	Returns the value that indicates whether the system property values have been inherited or not.
checkIn	Creates a new version of the entity from a draft.
checkOut	Creates a draft entity.
closed	Returns the date and time when the status of the entity was changed to »Closed«.
created	Returns the date and time of creation of the entity in the archive.
delete	Deletes the entity.
getArchive	Returns a reference to the archive.
getCategories	Returns a collection of categories.
getClassificationCode	Returns a classification code in canonical form.
getCreator	Returns the author of the entity.
getCustomContents	Returns the content collection of the entity.
getDescription	Returns the description of the entity.
getDraftCreator	Returns the author of the draft.
getDraftId	Returns the internal identifier of the draft.
getEffectiveRights	Returns effective rights of the current user over the entity.
getExternalIds	Returns a list of external identifiers of the entity.
getId	Returns the internal identifier of the entity.
getKeywords	Returns a collection of keywords for the entity.
getModifiedBy	Returns the last entity author.
getOwner	Returns the owner of the entity.
getParent	Returns the parent entity.
getPickListValues	Returns a list of predefined values of the system property of the entity.
getPublicClassificationCode	Returns the classification code in a public form.
getContent	Returns the content collection of the entity.
getProperties	Returns a collection of metadata.
getReferences	Returns a collection of references.
getReport	Returns the selected report type.
getRetention	Returns a collection of retention policies and disposition holds.

Java: Method (cont.)	Description
getSecurityClass	Returns the security class of the entity. Possible values are: <ul style="list-style-type: none"> <li>- Unclassified: access to the entity is not particularly restricted.</li> <li>- Restricted: the entity is internal in nature. Only those users with a »Restricted« security class or higher may access it;</li> <li>- Confidential: the entity is confidential in nature. Only those users with a »Confidential« security class or higher may access it;</li> <li>- Secret: the entity is secret in nature. Only those users with a »Secret« security class or higher may access it;</li> <li>- Top Secret: the entity is top secret in nature. Only those users with a »Top secret« security class or higher may access it;</li> </ul>
getSignificance	Returns the importance of the entity. Possible values are: <ul style="list-style-type: none"> <li>- Vital: the entity is of vital importance.</li> <li>- Permanent: the entity is permanent.</li> <li>- Retain: the entity is specified for retention.</li> <li>- Delete: the entity is specified for deletion.</li> </ul>
getStatus	Returns the status of the entity (class or folder or document directly under the class). Possible values are: <ul style="list-style-type: none"> <li>- Opened: the user can edit the entity providing he has appropriate effective rights (writing rights).</li> <li>- Closed: the users cannot edit the entity.</li> </ul>
getSubEntities	Returns a collection of subordinate entities according to the selected filter and editing keys.
getSubEntityTemplates	Returns a collection of templates for the creation of subordinate entities.
getSystemProperties	Returns a collection of system properties.
getSystemProperty	Returns a system property.
getTemplate	Returns the template after which the entity was created.
getTitle	Returns the title of the entity.
getType	Returns the type of the entity.
getVersionComment	Returns the comment of the version.
getVersionLabel	Returns the label of the version.
getVersions	Returns a collection of versions.
getVersionSequence	Returns a sequence number of the version.
hasAIP	Returns a value that indicates whether an archival information package is present for the entity.
hasDraft	Returns a value that indicates whether the entity has draft.
hasReferences	Returns a value that indicates whether the entity has references.
hasVersions	Returns a value that indicates whether the entity has versions.
isChildClassificationCodeGenerated	Returns a value that indicates whether the classification codes for subordinate entities are generated automatically or not.
isDraft	Returns a value that indicates whether the entity is draft.
isPermanent	Returns a value that indicates whether the entity in the archive is in permanent retention.
modified	Returns the date and time of the last modification of the entity.
move	Moves the entity under the selected parent entity.
open	Opens the entity in the selected mode (read or edit).
opened	Returns the date and time when the status of the entity changed to »Opened«.
search	Performs search under the entity.
setSecurityClass	Sets security class of the entity (see the getSecurityClass method).
setStatus	Sets the status of the entity (see the getStatus method).
subEntityCount	Returns the absolute number of subordinated entities.

### 5.3.5 “IEntity”, “IClass”, “IFolder” and “IDocument”

The *IEntity* interface represents an entity that was opened in read only or read and write mode. It contains the shared properties and methods of entities in the entity model. The *IClass*, *IFolder* and *IDocument* interfaces represent specialized entities for class, folder and document.

Besides publicly accessible data on the entity (chapter [“IEntityStub”](#)) the following properties are also available: *EffectiveRights* presents an overview of the currently logged in user’s rights for an entity, *PhysicalEntity* brings together metadata about a physical entity, and the *Save* method is used to save changes to an entity.

The *IEntity* interface contains the following elements:

.NET : Property	Description
Accessed	Returns the date and time the entity was last accessed.
ACL	Returns a collection of user rights for the specified entity.
ArchivalInformationalPackage	Returns the archival information package in base64 format.
Archive	Returns a reference to the archive.
AuditLog	Returns the <i>AuditLog</i> object for setting a message for the audit trail.
Categories	Returns or sets a collection of categories.
ClassificationCode	Returns or sets a classification code in canonicalized form.
Closed	Returns the date and time the entity’s status was changed to Closed.
Created	Returns the date and time the entity was created in the archive.
Creator	Returns the author of the entity.
Description	Returns or sets a description of the entity.
DraftCreator	Returns the author of the draft.
DraftId	Returns the internal identifier of the draft.
EffectiveRights	Returns the effective rights of the current user for the entity.
EmailEntity	Returns metadata about email.
EvidenceRecord	Returns an evidence record in base64 format.
ExternalIds	Returns or defines a list of external identifiers of the entity.
HasAIP	Returns a value that indicates whether an archival information package is present for the entity.
HasDraft	Returns a value that indicates whether the entity has draft.
HasReferences	Returns a value that indicates whether the entity has references.
HasVersions	Returns a value that indicates whether the entity has versions.
Id	Returns the entity’s internal identifier.
IsDraft	Returns a value that indicates whether the entity has draft.
IsClosed	Returns a value that tells the user whether the entity is closed or not.
IsPermanent	Returns a value that indicates whether the entity in the archive is in permanent retention.
Keywords	Returns or defines keywords for the entity.
Mode	Returns a value that specifies the mode in which the entity is open.
Modified	Returns the date and time the entity was last modified.
ModifiedBy	Returns the last entity modifier.

<b>.NET : Property (cont.)</b>	<b>Description</b>
MoveDetails	Returns a collection of metadata of the moved entity.
Opened	Returns the date and time the entity's status was changed to Opened.
Owner	Returns or sets the owner of the entity.
Parent	Returns the parent entity.
PhysicalEntity	Returns metadata about physical records.
Properties	Returns a collection of metadata.
PublicClassificationCode	Returns the classification code in public format.
References	Returns a collection of references.
Retention	Returns the retention policies and disposition holds for an entity.
SaveLog	Returns a record generated when the entity is saved.
SecurityClass	Returns or sets the security class of the entity. The following values are possible: <ul style="list-style-type: none"> <li>- Unclassified: there are no special restrictions on accessing the entity.</li> <li>- Restricted: the entity is internal in nature. Only users with a Restricted security class or higher may access the entity.</li> <li>- Confidential: the entity is confidential in nature. Only users with a Confidential security class or higher may access the entity.</li> <li>- Secret: the entity is secret in nature. Only users with a Secret security class or higher may access the entity.</li> <li>- Top Secret: the entity is top secret. Only users with a Top Secret security class or higher may access the entity.</li> </ul>
SecurityClassChangeDetails	Returns a list of changes to the entity's security class.
Significance	Returns or sets the significance of the entity. The following values are possible: <ul style="list-style-type: none"> <li>- Vital: the entity is of vital importance.</li> <li>- Permanent: the entity is permanent.</li> <li>- Retain: the entity is marked for retention.</li> <li>- Delete: the entity is marked for deletion.</li> </ul>
Status	Returns the status of the entity (of a class or a folder or of a document located directly below a class) The following values are possible: <ul style="list-style-type: none"> <li>- Opened: a user may edit the entity provided they have adequate rights (write rights).</li> <li>- Closed: users can no longer edit the entity.</li> </ul>
Stub	Returns publicly available entity data.
SubEntityCount	Returns the absolute number of child or sub-entities.
SubEntityTemplates	Returns a collection of templates for creating sub-entities.
SystemProperties	Returns a collection of system properties.
Template	Returns the template used to create the entity.
Title	Returns or sets the title of the entity.
TransferDetails	Returns metadata about a transferred entity.
Type	Returns a value that specifies the entity type.
VersionComment	Returns the comment of the version.
VersionLabel	Returns the label of the version.
VersionSequence	Returns the sequence number of the version.

.NET : Method	Description
AreValuesInherited	Returns a value that tells the user whether an entity's system properties are inherited or not.
Close	Closes an entity.
CreateBinaryValue	Creates binary content in the archive.
CreateStringMaxValue	Creates text or string content in the archive.
GetPickListValues	Returns a list of the entity's predefined system properties values.
GetReport	Returns the selected type of report.
GetRetention	Returns a collection of retention policies and disposition holds.
GetSubEntities	Returns a collection of sub-entities in line with the selected filters and sorting keys.
GetSystemProperty	Returns a system property.
Save	Saves changes to the entity.
Search	Performs a search below the entity.

Java : Method	Description
accessed	Returns the date and time of last access to the entity.
areValuesInherited	Returns the value that indicates whether the system property values of the entity have been inherited or not.
close	Closes the entity.
closed	Returns the date and time when the status of the entity was changed to »Closed«.
createBinaryValue	Creates binary content in the archive.
created	Returns the date and time of creation of the entity in the archive.
createStringMaxValue	Creates textual content in the archive.
getACL	Returns a collection of user rights over a particular entity.
getArchivalInformationalPackage	Returns archival information package in base 64 format.
getArchive	Returns a reference to the archive.
getAuditLog	Returns an <i>AuditLog</i> object to set a message for the audit trail.
getCategories	Returns a collection of categories.
getClassificationCode	Returns a classification code in canonical form.
getCreator	Returns the author of the entity.
getDescription	Returns the description of the entity.
getDraftCreator	Returns the author of the draft.
getDraftId	Returns the internal identifier of the draft.
getEffectiveRights	Returns effective rights of the current user over the entity.
getEmailEntity	Returns the metadata on e-mail.
getEvidenceRecord	Returns the evidence record in base 64 format.
getExternalIds	Returns a list of external identifiers of the entity.
getId	Returns the internal identifier of the entity.
getKeywords	Returns a collection of keywords for the entity.
getMode	Returns a value that indicates the way in which the entity is open.
getModifiedBy	Returns the last entity modifier.
getMoveDetails	Returns a metadata collection of a moved entity.
getOwner	Returns the owner of the entity.
getParent	Returns the parent entity.
getPhysicalEntity	Returns the metadata on physical material.
getPickListValues	Returns a list of predefined values of the system property of the entity.
getProperties	Returns a collection of metadata.
getPublicClassificationCode	Returns the classification code in the public form.

Java : Method (cont.)	Description
getReferences	Returns a collection of references.
getReport	Returns the selected report type.
getRetention	Returns a collection of retention policies and disposition holds.
getSaveLog	Returns a log that is generated when saving an entity.
getSecurityClass	Returns the security class of the entity. Possible values are: <ul style="list-style-type: none"> <li>- Unclassified: access to the entity is not particularly restricted.</li> <li>- Restricted: the entity is internal in nature. Only those users with a »Restricted« security class or higher may access it;</li> <li>- Confidential: the entity is confidential in nature. Only those users with a »Confidential« security class or higher may access it;</li> <li>- Secret: the entity is secret in nature. Only those users with a »Secret« security class or higher may access it;</li> <li>- Top Secret: the entity is top secret in nature. Only those users with a »Top secret« security class or higher may access it;</li> </ul>
getSecurityClassChangeDetails	Returns the list of security class changes.
getSignificance	Returns or sets the importance of the entity. Possible values are: <ul style="list-style-type: none"> <li>- Vital: the entity is of vital importance.</li> <li>- Permanent: the entity is permanent.</li> <li>- Retain: the entity is specified for retainment.</li> <li>- Delete: the entity is specified for deletion.</li> </ul>
getStatus	Returns or sets the status of the entity (class or folder or document directly under the class). Possible values are: <ul style="list-style-type: none"> <li>- Opened: the user can edit the entity providing he has appropriate effective rights (writing rights).</li> <li>- Closed: the users cannot edit the entity.</li> </ul>
getStub	Returns publicly available entity data.
getSubEntities	Returns a collection of subordinate entities according to the selected filter and editing keys.
getSubEntityTemplates	Returns a collection of templates for the creation of subordinate entities.
getSystemProperties	Returns a collection of system properties.
getSystemProperty	Returns the system property.
getTemplate	Returns the template after which the entity was created.
getTitle	Returns the title of the entity.
getTransferDetails	Returns the metadata on transferred entity.
getType	Returns a value that indicates the entity type.
getVersionComment	Returns the comment of the version.
getVersionLabel	Returns the label of the version.
getVersionSequence	Returns a sequence number of the version.
hasAIP	Returns a value that indicates whether an archival information package is present for the entity.
hasDraft	Returns a value that indicates whether the entity has draft.
hasReferences	Returns a value that indicates whether the entity has references.
hasVersions	Returns a value that indicates whether the entity has versions.
isClosed	Returns a value that indicates whether an entity is closed or not.
isDraft	Returns a value that indicates whether the entity has draft.
isPermanent	Returns a value that indicates whether an entity is in permanent retention in the archive.
modified	Returns the date and time of last modification of the entity.
opened	Returns the date and time when the entity status changed to »Opened«.

Java : Method (cont.)	Description
save	Saves changes to the entity.
search	Performs search under the entity.
setCategories	Sets a collection of the categories.
setClassificationCode	Sets the classification code in canonical form.
setDescription	Sets the description of the entity.
setExternalIds	Sets the list of external entity identifiers.
setKeywords	Sets a collection of keywords for the entity.
setOwner	Sets the owner of the entity.
setSecurityClass	Sets the security class of the entity (see the getSecurityClass method).
setSignificance	Sets the significance of the entity (see the getSignificance method).
setStatus	Sets the status of the entity (see the getStatus method).
setTitle	Sets the title of the entity.
subEntityCount	Returns the absolute number of subordinate entities.

Besides the elements of the *IEntity* interface, the *IClass* interface also contains the following elements:

.NET : Property	Description
IsChildClassificationCodeGenerated	Returns or sets a value that tells the user whether classification codes are automatically generated for child or sub-entities or not.

.NET : Method	Description
CreateClass	Creates a subclass below the class.
CreateDocument	Creates a document below the class.
CreateFolder	Creates a folder below the class.

Java : Method	Description
createClass	Creates a subclass under the class.
createDocument	Creates a document under the class.
createFolder	Creates a folder under the class.
isChildClassificationCodeGenerated	Returns a value that indicates whether the classification codes for subordinate entities are generated automatically or not.
setChildClassificationCodeGenerated	Sets a value that indicates whether the classification codes for subordinate entities are generated automatically or not.

Besides the elements of the *IEntity* interface, the *IFolder* interface also contains the following elements:

.NET : Method	Description
CreateDocument	Creates a document below the folder.
CreateFolder	Creates a subfolder below the folder.

Java : Method	Description
createDocument	Creates a document under the folder.
createFolder	Creates a contained folder under the folder.

Besides the elements of the *IEntity* interface, the *IDocument* interface also contains the following elements:

.NET : Property	Description
Content	Returns the entity's content collection.
CustomContents	Returns a custom collection of the entity's content.

.NET : Method	Description
CreateContentPart	Creates a file in the archive.

Java : Method	Description
createContentPart	Creates a folder in the archive.
getContent	Returns a collection of document contents.
getCustomContents	Returns a collection of customized document contents.

### 5.3.6 “IReadOnlyProperty” and “IProperty”

The *IReadOnlyProperty* interface represents metadata intended only for reading or viewing. It contains properties that describe metadata and metadata values. The *Type* property returns the metadata type, and the *ValueCount* property returns the number of metadata values. Access to the metadata values is enabled with the *GetValue* and *GetValues* methods.

The *IProperty* executable interface represents metadata that can be edited. Besides the values and methods of the *IReadOnlyProperty* interface, it also contains the *EffectiveRights* property for viewing the effective rights of the current user for the metadata and the *SetValue* and *SetValues* methods for setting one or more metadata values.

The *IReadOnlyProperty* interface contains the following elements:

.NET : Property	Description
AreValuesInherited	Returns a value that tells the user whether metadata values are inherited or not.
Description	Returns a description of the metadata.
IsAppendOnly	Returns a value that tells the user whether metadata values can only be appended (added) or not.
IsIncludedInAIP	Returns a value that tells the user whether metadata values form a part of the archival information package (AIP).
IsInherited	Returns a value that tells the user whether a metadata value is inherited.
IsMultiValue	Returns a value that tells the user whether metadata can have more than one value.
IsPickList	Returns a value that tells the user whether the metadata has predefined valid values.



<b>.NET : Property (cont.)</b>	<b>Description</b>
IsPublic	Returns a value that tells the user whether the metadata is publicly accessible.
IsReadOnly	Returns a value that tells the user whether the metadata is read only.
IsReadOnlyAfterCheckIn	Returns a value that tells the user whether the metadata is read only after creating a new version.
IsReadOnlyAfterCreate	Returns a value that tells the user whether the metadata is read only after create.
IsRequired	Returns a value that tells the user whether the metadata is required.
IsSearchable	Returns a value that tells the user whether the metadata's values can be used to search.
IsUnique	Returns a value that tells the user whether the metadata value must be unique.
IsVersionable	Returns a value that tells the user whether the metadata value can be defined for each version.
Name	Returns the unique name of the metadata.
PickListValues	Returns a list of predefined metadata values.
Type	Returns the type of metadata.
ValueCount	Returns the number or count of metadata values.

<b>.NET : Method</b>	<b>Description</b>
GetValue	Returns the metadata value.
GetValues	Returns a list of metadata values.
GetXmlValue	Returns the metadata value in XML-equivalent format.
GetXmlValues	Returns a list of metadata values in XML-equivalent format.

<b>Java : Method</b>	<b>Description</b>
areValuesInherited	Returns a value that indicates whether the metadata values are inherited or not.
getDescription	Returns the description of the metadata.
getName	Returns the unique name of the metadata.
getPickListValues	Returns a list of predefined metadata values.
getType	Returns the type of metadata.
getValue	Returns the value of metadata.
getValues	Returns a list of metadata values.
getXmlValue	Returns the value of metadata in XML equivalent format.
getXmlValues	Returns a list of metadata values in XML equivalent format.
isAppendOnly	Returns a value that indicates whether the value of the metadata can only be added.
isIncludedInAIP	Returns a value that indicates whether the value of the metadata is a part of an archival information package.
isInherited	Returns a value that indicates whether the value of the metadata is inherited.
isMultiValue	Returns a value that indicates whether the metadata has more than one value.
isPickList	Returns a value that indicates whether the metadata has prescribed valid values.
isPublic	Returns a value that indicates whether the metadata is publicly accessible.
isReadOnly	Returns a value that indicates whether the metadata is read-only.
isReadOnlyAfterCheckIn	Returns a value that indicates whether the metadata is read-only after check-in.
isReadOnlyAfterCreate	Returns a value that indicates whether the metadata is read-only after create.
isRequired	Returns a value that indicates whether the metadata is required.
isSearchable	Returns a value that indicates whether the metadata value is searchable.
isUnique	Returns a value that indicates whether the metadata value must be unique.
IsVersionable	Returns a value that tells the user whether the metadata value can be defined for each version.
valueCount	Returns the value count of the metadata.

Besides the elements of the *IReadOnlyProperty* interface, the *IProperty* interface also contains the following elements:

<b>.NET : Property</b>	<b>Description</b>
CommittedValueCount	Returns the number or count of saved metadata values.
EffectiveRights	Returns the effective rights of the current user over the metadata.

<b>.NET : Method</b>	<b>Description</b>
Clear	Clears the metadata value(s).
SetValue	Sets the metadata value.
SetValues	Sets a list of metadata values.
SetXmlValue	Sets the metadata value in XML-equivalent format.
SetXmlValues	Sets a list of metadata values in XML-equivalent format.

<b>Java : Method</b>	<b>Description</b>
clear	Clears the metadata value(s).
committedValueCount	Returns the number of saved metadata values.
getEffectiveRights	Returns the effective rights of the current user over the metadata.
setValue	Sets the metadata value.
setValues	Sets the metadata value list.
setXmlValue	Sets the metadata value in XML equivalent format
setXmlValues	Sets the metadata value list in XML equivalent format.

### 5.3.7 “IReadOnlyContent”, “IContent” and “IContentPart”

The *IReadOnlyContent* interface represents the content of an entity intended only for reading or viewing. The *IContent* executable interface represents the content of an entity that may be edited. The content of an entity consists of one or more files accessed through the *IContentPart* interface.

The *IReadOnlyContent* interface contains the following elements:

<b>.NET : Property</b>	<b>Description</b>
EffectiveRights	Returns the effective rights of the current user over the content.
Name	Returns the unique name of the content collection.
IsPublic	Returns a value that indicates whether the content is public.
IsReadOnly	Returns a value that indicates whether the content is read-only.
IsReadOnlyAfterCheckIn	Returns a value that indicates whether the content is read-only after check-in.
IsReadOnlyAfterCreate	Returns a value that indicates whether the content is read-only after create.
IsVersionable	Returns a value that tells the user whether the content can be defined for each version.
PartsCount	Returns the number or count of contents in the content collection.

<b>.NET : Method</b>	<b>Description</b>
GetParts	Returns a list of entity contents.

Java : Method	Description
EffectiveRights	Returns the effective rights of the current user over the content.
getName	Returns the unique name for the content collection.
getParts	Returns a list of the contents of the entity.
isPublic	Returns a value that indicates whether the content is public.
isReadOnly	Returns a value that indicates whether the content is read-only.
isReadOnlyAfterCheckIn	Returns a value that indicates whether the content is read-only after check-in.
isReadOnlyAfterCreate	Returns a value that indicates whether the content is read-only after create.
isVersionable	Returns a value that tells the user whether the content can be defined for each version.
partsCount	Returns the number of contents in the content collections.

Besides the elements of the *IReadOnlyContent* interface, the *IContent* interface also contains the following elements:

.NET : Method	Description
Clear	Clears an entity's content collection.
MoveParts	Moves entity content.
QueuePartsForConvert	Adds files to the conversion queue.
QueuePartsForIndex	Adds files to the indexing queue.
SetParts	Sets a list of entity contents.

Java : Method	Description
clear	Clears the content collection of the entity.
moveParts	Moves entity content.
queuePartsForConvert	Adds files to the conversion queue.
queuePartsForIndex	Adds files to the indexing queue.
setParts	Sets a list of the contents of the entity.

The *IContentPart* interface contains the following elements:

.NET : Property	Description
Accessed	Returns the date and time the file was last accessed.
ContentType	Returns a list of content type (MIME) for the file.
Created	Returns the date and time the file was created.
DefaultContentType	Returns the default content type (MIME) for the file.
DefaultExtension	Returns the default file extension for the file.
Description	Returns or sets a description of the file.
Extension	Returns a list of extension for the file.
Id	Returns the unique identifier of the content.
IsIndexed	Returns a value that specifies whether the content is indexed.
IsSigned	Returns a value that specifies whether the content is signed.
Modified	Returns the date and time the file was last modified.
Parent	Returns the parent entity content.
Size	Returns the number of content values.
SubParts	Returns the subordinate entity content.

.NET : Method	Description
Clone	Copies the file to a specific entity.
Detach	Detaches the representation of the entity content.
Move	Moves the entity content.
OpenDataStream	Opens the datastream of the file in the selected mode (read only or read and write).
QueueForConvert	Adds a file to the conversion queue.
QueueForIndex	Adds a file to the indexing queue.

Java : Method	Description
accessed	Returns the date and time of last access to the file.
clone	Copies the file to a specific entity.
created	Returns the date and time of file creation.
detach	Detaches the subordinate entity content.
getContentType	Returns a list of content types (MIME) for the file.
getDescription	Returns a file description.
getExtension	Returns the default extension for the file.
getId	Returns the unique content identifier.
getParent	Returns the parent entity content.
getSize	Returns the number of content values.
getSubParts	Returns the subordinate entity content.
isIndexed	Returns a value that specifies whether the content is indexed.
isSigned	Returns a value that specifies whether the content is signed.
modified	Returns the date and time of last modification of the file.
move	Moves entity content.
openDataInputStream	Opens a data stream for a read file.
openDataOutputStream	Opens a data stream for a write file.
queueForConvert	Adds a file to the conversion queue.
queueForIndex	Adds a file to the indexing queue.
setDescription	Sets file description.

### 5.3.8 “IRetention”, “IRetentionPolicyEntry”, “IRetentionPolicyContext” and “IDispositionHoldEntry”

The *IRetention* interface represents entry collections for retention policy and entity disposition hold. It enables access to the collections and saving changes. The retention policy entry of an entity is represented by the *IRetentionPolicyEntry* interface that is specified in detail by the *IRetentionPolicyContext* interface.

The entity disposition hold entry is represented by the *IDispositionHoldEntry* interface.

The *IRetention* interface contains the following elements:

<b>.NET : Property</b>	<b>Description</b>
DispositionHoldEntries	Returns the collection of entries for entity disposition hold.
Mode	Returns the method of accessing the collections of entries for retention policies and disposition holds of the entity.
PolicyEntries	Returns the collection of entries for entity retention policies.

<b>.NET : Method</b>	<b>Description</b>
AddDispositionHold	Adds an entry of entity disposition hold.
AddPolicyEntry	Adds an entry of entity retention policies.
Close	Closes the access to the collections of retention policies and disposition holds of the entity.
Save	Saves changes over collections of retention policies and disposition holds of the entity.

<b>Java : Method</b>	<b>Description</b>
addDispositionHold	Adds a disposition hold entry for the entity.
addPolicyEntry	Adds a policy retention hold entry for the entity.
close	Closes the access to the collections of retention policies and disposition holds of the entity.
getDispositionHoldEntries	Returns the entry collection for disposition holds of the entity.
getMode	Returns the method of accessing the collections of entries for retention policies and disposition holds of the entity.
getPolicyEntries	Returns the entry collection for retention policies of the entity.
save	Saves changes over collections of retention policies and disposition holds of the entity.

The *IRetentionPolicyEntry* interface contains the following elements:

<b>.NET : Property</b>	<b>Description</b>
Definition	Returns the definition of entity retention policy.
ExplicitContext	Returns the explicit context entry for entity retention policy.
InheritedContext	Returns the inherited context entry for entity retention policy.

<b>.NET : Method</b>	<b>Description</b>
Delete	Deletes the explicit context entry for entity retention policy.

<b>Java : Method</b>	<b>Description</b>
delete	Deletes explicit entry context for retention policies of the entity.
getDefinition	Returns the definition of the retention policy of the entity.
getExplicitContext	Returns the explicit entry context for the retention policy of the entity.
getInheritedContext	Returns the inherited context for the retention policy of the entity.

The *IReadOnlyRetentionPolicyContext* interface contains the following elements:

.NET : Property	Description
Filter	Returns the context filter for the retention policy of the entity.
IsEffective	Returns a value that indicates whether the policy retention context of the entity is effective.
Scope	Returns the context scope for the retention policy of the entity.

Java : Method	Description
getFilter	Returns the context filter for the retention policy of the entity.
getScope	Returns the context scope for the retention policy of the entity.
isEffective	Returns a value that indicates whether the policy retention context of the entity is effective.

The *IRetentionPolicyContext* interface derives from the *IReadOnlyRetentionPolicyContext* interface and contains the following elements:

.NET : Property	Description
Filter	Returns the context filter for the retention policy of the entity.
Owner	Returns the <i>IRetentionPolicyEntry</i> bound to the context.
Scope	Returns the context scope for the retention policy of the entity.

Java : Method	Description
getOwner	Returns the <i>IRetentionPolicyEntry</i> bound to the context.
setFilter	Sets a context filter for the retention policy of the entity.
setScope	Returns the context scope for the retention policy of the entity.

The *IDispositionHoldEntry* interface contains the following elements:

.NET : Property	Description
Definition	Returns the definition of entity disposition hold.
IsInherited	Returns the value that tells the user whether the entry for entity disposition hold is inherited.

.NET : Method	Description
Delete	Deletes an explicit entry for entity disposition hold.

Java : Method	Description
delete	Deletes explicit entry context for the disposition hold of the entity.
getDefinition	Returns the definition of the disposition hold of the entity.
isInherited	Returns a value that indicates whether the entry for disposition hold is inherited or not.

### 5.3.9 “IReviewStub”

The *IReviewStub* interface represents publicly available review metadata. The interface is a limited version of *IEntityStub* (chapter [“IEntityStub”](#)) interface with two additions:

- the *State* property that represents the review state;
- The *Message* property, where an archive server logs operation messages during the review.

The *IReviewStub* interface contains the following elements:

.NET : Property	Description
Accessed	Returns the date and time the review was last accessed.
Archive	Returns the reference to the archive.
ClassificationCode	Returns the classification code in canonicalized form.
Closed	Returns the date and time the reviewing status was changed to Closed.
Created	Returns the date and time the review was created.
Creator	Returns the author of review.
Description	Returns a description of the review.
EffectiveRights	Returns the effective rights of the current user on the review.
HasAIP	Returns a value that indicates whether an archival information package is present for the review.
Id	Returns the review's internal identifier.
Keywords	Returns a collection of keywords for the review.
Message	Returns the message from the archive server that represents the state or error.
Modified	Returns the date and time the review was last modified.
Opened	Returns the date and time the review's status was changed to Opened.
Owner	Returns the owner of the review.
PublicClassificationCode	Returns the classification code in public form.
State	Returns the review's state. The following values are possible: <ul style="list-style-type: none"> <li>- Unknown: the review's state is unknown;</li> <li>- Created: a review is created;</li> <li>- Preparing: a review is being prepared;</li> <li>- InReview: the review is in review;</li> <li>- Completing: the review is in the process of completion;</li> <li>- Discarded: the review has been discarded;</li> <li>- Failed: the review has failed.</li> </ul>
Status	Returns the status of the review. The following values are possible: <ul style="list-style-type: none"> <li>- Opened: the review can be edited by a user with adequate rights (write rights).</li> <li>- Closed: users can no longer edit the review.</li> </ul>
Stub	Returns publicly available entity data.
SubEntityTemplates	Returns a collection of templates for creating sub-entities.
Template	Returns the template used to create the review.
Title	Returns the title of the review.

<b>.NET : Method</b>	<b>Description</b>
AreValuesInherited	Returns a value that tells the user whether the review's system properties are inherited or not.
GetPickListValues	Returns a list of predefined values of the system properties of the entity.
GetReport	Returns the selected report type.
Save	Save changes for a review in the review process.

<b>Java : Method</b>	<b>Description</b>
accessed	Returns the date and time of last access to the review in the review process.
areValuesInherited	Returns a value that indicates whether the review values of the system property in the review process are inherited or not.
closed	Returns the date and time when the status of the review in the review process changed to »Closed«.
created	Returns the date and time of creation of the review in the review process in the archive.
getArchive	Returns a reference to the archive.
getClassificationCode	Returns a classification code in canonical form.
getCreator	Returns the author of the review in the review process.
getDescription	Returns a description of the review in the review process.
getEffectiveRights	Returns the effective rights of the current user over the review in the review process.
getId	Returns an internal identifier of the review in the review process.
getKeywords	Returns a collection of keywords for the review in the review process.
getMessage	Returns a message of the archive server that represents a status or an error during the execution of the review process.
getOwner	Returns the owner of the review in the review process.
getPickListValues	Returns a list of predefined values of the system properties of the entity.
getPublicClassificationCode	Returns a classification code in public form.
getState	Returns the review status of review processes. Possible values are: <ul style="list-style-type: none"> <li>- Unknown: the review status in the review process is unknown;</li> <li>- Created: the review in the review process is created;</li> <li>- Preparing: the review in the review process is being prepared;</li> <li>- InReview: the review in the review process is in review;</li> <li>- Completing: the review in the review process is being completed;</li> <li>- Completed: the review in the review process has been completed;</li> <li>- Discarded: the review in the review process has been discarded;</li> <li>- Failed: the review in the review process has been completed with an error.</li> </ul>
getStatus	Returns the review status in the review process. Possible values are: <ul style="list-style-type: none"> <li>- Opened: the user can edit the review in the review process providing he has appropriate effective rights (writing rights).</li> <li>- Closed: the users cannot edit the review in the review process.</li> </ul>
getSubEntityTemplates	Returns a collection of templates for the creation of subordinate entities.
getTemplate	Returns the template after which the review in the review process was created.
getTitle	Returns the title of the review in the review process.
modified	Returns the date and time of the last review modification in the review process.
open	Opens the review in the review process in the selected mode (read or edit).
opened	Returns the date and time when the status of the review in the review process changed to »Opened«.
setStatus	Sets the status of the review in the review process.



### 5.3.10 “IReview”

The *IReview* interface represents a review that is opened in read only or read and write mode. The interface represents a limited version of the IEntity interface. For more information see chapter [“IEntity”, “IClass”, “IFolder” and “IDocument”](#).

Besides publicly available review data (chapter [“IReviewStub”](#)), the following properties are also available:

- *Action* for selecting an action in the review.
- *Members* for selecting members in the review.
- *ReviewedItems* and *ScheduledItems* with a collection of entities that are reviewed or subjects to review.

The IReview interface contains the following elements:

.NET : Property	Description
Accessed	Returns the date and time the review was last accessed.
ACL	Returns a collection of user rights for review.
Action	Returns or sets a review action. The following values are possible: <ul style="list-style-type: none"> <li>- Reviewing: a review is in progress</li> <li>- Completed: a review is completed</li> <li>- Discard: a review will be discarded.</li> </ul>
ArchivalInformationalPackage	Returns the archival information package (AIP) in base64 format.
Archive	Returns a reference to the archive.
AuditLog	Returns the AuditLog object for setting a message for the audit trail.
ClassificationCode	Returns or sets a classification code in canonicalized form.
Closed	Returns the date and time the review’s status was changed to Closed.
Comments	Returns or sets review comments in the review process.
Created	Returns the date and time the review was created in the archive.
Comments	Returns comments on the review.
Creator	Returns the author of the review.
Description	Returns or sets a description of the review.
Documents	Returns a collection of review documents.
EffectiveRights	Returns the effective rights of the current user for the review.
HasAIP	Returns a value that indicates whether an archival information package is present for the review.
EvidenceRecord	Returns an evidence record in base64 format.
Id	Returns the entity’s internal identifier.
IsClosed	Returns a value that tells the user whether the review is closed or not.
Keywords	Returns or sets a collection of keywords for the review.
Members	Returns or sets the members of the commission that have implemented the review.
Message	Returns a message from the archive server that represents the state or error in the review process.
Mode	Returns a value that specifies the mode in which the review is open.

<b>.NET : Property (cont.)</b>	<b>Description</b>
Modified	Returns the date and time the review was last modified.
Opened	Returns the date and time the review's status was changed to Opened.
Owner	Returns or sets the owner of the review when creating the review.
PublicClassificationCode	Returns the classification code in public format.
QueryExpression	Returns a query expression used when creating the review.
RetentionPolicies	Returns a collection of retention policies used when creating the review.
ReviewedItems	Returns a collection of entities that have been reviewed.
SaveLog	Returns a record generated when the entity is saved.
ScheduledItems	Returns a collection of entities that are subjects to review.
Scope	Returns an entity that defines the scope of the review.
State	Returns the review state when creating the review. The following values are possible: <ul style="list-style-type: none"> <li>- Unknown: the review is unknown.</li> <li>- Created: a review is created.</li> <li>- Preparing: a review is being prepared.</li> <li>- InReview: the review is in review.</li> <li>- Completing: the review is in the process of completion.</li> <li>- Completed: the review is completed.</li> <li>- Discarded: the review has been discarded.</li> <li>- Failed: the review has failed.</li> </ul>
Status	Returns or sets the status when creating the review. The following values are possible: <ul style="list-style-type: none"> <li>- Opened: a user may edit the review if he/she has appropriate effective rights (write rights).</li> <li>- Closed: a user can no longer edit the review.</li> </ul>
Stub	Returns publicly available entity data.
SubEntityTemplates	Returns a collection of templates for creating sub-entities.
Template	Returns the template used to create the review.
Title	Returns or sets the title of the review.

<b>.NET : Method</b>	<b>Description</b>
AreValuesInherited	Returns a value that tells the user whether a review's system properties are inherited or not.
Close	Closes the review.
CreateDocument	Creates a document in the review.
GetPickListValues	Returns a list of the review's predefined system properties values.
GetReport	Returns the selected report type.
Save	Saves changes to the review.

<b>Java : Method</b>	<b>Description</b>
accessed	Returns the date and time of last access to the review in the review process.
areValuesInherited	Returns the value that indicates whether the review system property values in the review process have been inherited or not.
close	Closes the review in the review process.
closed	Returns the date and time when the status of the review in the review process was changed to »Closed«.
created	Returns the date and time of review creation in the review process in the archive.

Java : Method (cont.)	Description
createDocument getACL getAction  getArchivalInformationalPackage getArchive getAuditLog getClassificationCode getComments getCreator getDescription getDocuments getEffectiveRights getEvidenceRecord getId getKeywords getMembers  getMessage  getMode getOwner getPickListValues  getPublicClassificationCode getQueryExpression getReport getRetentionPolicies  getReviewedItems getSaveLog getScheduledItems getScope getState  getStatus	Creates a document in the review in the review process. Returns a collection of user rights over the review in the review process. Returns the review action in the review process. Possible values are: <ul style="list-style-type: none"> <li>- Reviewing: a review in the review process is being carried out;</li> <li>- Completed: a review in the review process has been completed;</li> <li>- Discard: a review in the review process has been discarded.</li> </ul> Returns an archival information package in base 64 format. Returns a reference to the archive. Returns an <i>AuditLog</i> object to set a message for the audit trail. Returns or sets a classification code in canonical form. Returns review comments in the review process. Returns the author of the review in the review process. Returns the description of the review in the review process. Returns a review document collection in the review process. Returns effective rights of the current user over the review in the review process. Returns the evidence record in base 64 format. Returns the internal identifier of the entity. Returns a collection of keywords for the review in the review process. Returns the members of the committee that carried out the review in the review process. Returns a message of the archive server that represents a status or an error during the execution of the review process. Returns a value that indicates how the review in the review process was open. Returns the owner of the review in the review process. Returns a list of predefined values of the review system properties in the review process. Returns a classification code in public form. Returns a query expression used to create the review in the review process. Returns the selected report type. Returns a collection of retention policies used to create the review in the review process. Returns the collection of entities that were reviewed in the review process. Returns a log that is created when saving the entity. Returns a collection of entities that were reviewed in the review process. Returns the entity that determines the review scope in the review process. Returns the review status of review processes. Possible values are: <ul style="list-style-type: none"> <li>- Unknown: the review status in the review process is unknown;</li> <li>- Created: the review in the review process is created;</li> <li>- Preparing: the review in the review process is being prepared;</li> <li>- InReview: the review in the review process is in review;</li> <li>- Completing: the review in the review process is being completed;</li> <li>- Completed: the review in the review process has been completed;</li> <li>- Discarded: the review in the review process has been discarded;</li> <li>- Failed: the review in the review process has been completed with an error.</li> </ul> Returns the review status in the review process. Possible values are: <ul style="list-style-type: none"> <li>- Opened: the user can edit the review in the review process providing he has appropriate effective rights (writing rights);</li> <li>- Closed: the users cannot edit the review in the review process.</li> </ul>

Java : Method (cont.)	Description
getSubEntityTemplates	Returns a collection of templates for the creation of subordinate entities.
getTemplate	Returns the template after which the review in the review process was created.
getTitle	Returns the title of the review in the review process.
hasAIP	Returns a value that indicates whether an archival information package is present for the review.
isClosed	Returns a value that indicates whether the review of the review process is closed or not.
modified	Returns the date and time of the last review modification of the review process.
opened	Returns the date and time when the review status in the review process changed to »Opened«.
save	Saves changes to the review in the review process.
setAction	Sets the review action in the review process (see the getAction method).
setComments	Sets review comments in the review process.
setDescription	Sets the review description in the review process.
setKeywords	Sets a collection of keywords for the review in the review process.
setMembers	Sets committee members that performed the review in the review process.
setOwner	Sets the review owner in the review process.
setStatus	Sets the review status in the review process (see the getStatus method).
setTitle	Sets the review title in the review process.

### 5.3.11 “AuditLog”

The *AuditLog* object represents a message that can be used in the audit trail for certain operations with an entity, including creating, opening, saving, moving and deleting.

The message must be delivered in the form of a C-style string.

The *AuditLog* object contains the following elements:

.NET : Property	Description
Arguments	Returns or sets arguments for the audit trail message.
Message	Returns or sets the audit trail message.

.NET : Method	Description
Clear	Clears the message and arguments for the audit trail.

Java : Method	Description
clear	Clears the message and arguments for the audit trail.
getArguments	Returns the message arguments for the audit trail.
getMessage	Returns the message for the audit trail.
setArguments	Sets the message arguments for the audit trail.
setMessage	Sets the message for the audit trail.

### 5.3.12 “AuditQuery”

The *Auditquery* object represents parameters for getting the audit trail. The parameters are divided into three groups: parameters linked to the session (network address, computer name and user name), parameters linked to objects (object identifiers and action identifiers) and dates.

Session and object parameters can be delivered as a list or a series. The series determines the first and last values. Besides these parameters, there is also a parameter that determines the order in which the audit trail is sorted. The audit trail is returned in the form of a data stream through the *AuditLogQuery* method of the *IArchive* interface. For more information see chapter ["IArchive"](#).

The *AuditLog* object contains the following elements:

.NET : Property	Description
Addresses	Returns a list of network addresses that form a part of the session parameters.
AddressFrom	Returns or sets the first network address in a series of network addresses that form a part of the session parameters.
AddressTo	Returns or sets the last network address in a series of network addresses that form a part of the session parameters.
ComputerNameFrom	Returns or sets the first computer name in a series of computer names that form a part of the session parameters.
ComputerNames	Returns a list of computer names that form a part of the session parameters.
ComputerNameTo	Returns or sets the last computer name in a series of computer names that form a part of the session parameters.
DateFrom	Returns or sets the first date in a series of dates that form a part of the date parameters.
DateTo	Returns or sets the last date in a series of dates that form a part of the date parameters.
EventIdFrom	Returns or sets the first event identifier in a series of event identifiers that form a part of the object parameters.
EventIdQueryType	Returns or sets a value that tells the user whether event identifiers are arranged as a list or a series.
EventIds	Returns a list of event identifiers that form a part of the object parameters.
EventIdTo	Returns or sets the last event identifier in a series of event identifiers that form a part of the object parameters.
Filter	Returns or sets the filter for search results in the audit trail.
IsRecursive	Returns a value that indicates whether the search in the audit trail of given object identifiers should be performed recursively.
IsValid	Returns a value that indicates whether the currently set search parameters in the audit trail are valid.
ObjectIds	Returns a list of object identifiers that form a part of the object parameters.

<b>.NET : Property (cont.)</b>	<b>Description</b>
ObjectScope	Returns or sets a value that tells the user whether the object parameters are object identifiers, event identifiers or both.
SessionQueryType	Returns or sets a value that tells the user whether session parameters are arranged as a list or a series.
SessionScope	Returns or sets a value that tells the user whether session parameters are network addresses, user names, computer names or all of these.
SortOrder	Returns or sets a value that tells the user the sorting order of the audit trail parameters (session, object and date parameters).
UserNameFrom	Returns or sets the first user name in a series of user names that form a part of the session parameters.
UserNames	Returns a list of user names that form a part of the session parameters.
UserNameTo	Returns or sets the last user name in a series of user names that form a part of the session parameters.

<b>Java : Method</b>	<b>Description</b>
getAddresses	Returns a list of network addresses that are a part of session parameters.
getAddressFrom	Returns the first network address of a string of network addresses that are a part of session parameters.
getAddressTo	Returns the last network address of a string of network addresses that are a part of session parameters.
getComputerNameFrom	Returns the first computer's name of a string of computer names that are a part of session parameters.
getComputerNames	Returns a string of computer names that are a part of session parameters.
getComputerNameTo	Returns the last computer's name of a string of computer names that are a part of session parameters.
getDateFrom	Returns the first date of a string of dates that are a part of date parameters.
getDateTo	Returns the last date of a string of dates that are a part of date parameters.
getEventIdFrom	Returns the first event identifier of a string of event identifiers that are a part of object parameters.
getEventIdQueryType	Returns a value that indicates whether event identifiers are stacked in a list or a string.
getEventIds	Returns a list of event identifiers that are a part of object parameters.
getEventIdTo	Returns the last event identifier of a string of event identifiers that are a part of object parameters.
getFilter	Returns a filter for search results in the audit trail.
getObjectIds	Returns a list of object identifiers that are a part of object parameters.
getObjectScope	Returns a value that indicates whether object parameters are object identifiers, event identifiers or all.
getSessionQueryType	Returns a value that indicates whether session parameters are stacked in a list or a string.
getSessionScope	Returns a value that indicates whether session parameters are network addresses, usernames, computer names or all.
getSortOrder	Returns a value that indicates the sorting order of the audit trail depending on session parameters, object or date.
getUserNameFrom	Returns the first username of a string of usernames that are a part of session parameters.

Java : Method (cont.)	Description
getUserNames	Returns a list of usernames that are a part of session parameters.
getUserNameTo	Returns or sets the last username of a string of usernames that are a part of session parameters.
isRecursive	Returns a value that indicates whether the search in the audit trail of given object identifiers should be performed recursively.
isValid	Returns a value that indicates whether the currently set search parameters in the audit trail are valid.
setAddressFrom	Sets the first network address of a string of network addresses that are a part of session parameters.
setAddressTo	Sets the last network address of a string of network addresses that are a part of session parameters.
setComputerNameFrom	Sets the first computer's name of a string of computer names that are a part of session parameters.
setComputerNameTo	Sets the last computer's name of a string of computer names that are a part of session parameters.
setDateFrom	Sets the first date of a string of dates that are a part of date parameters.
setDateTo	Sets the last date of a string of dates that are a part of date parameters.
setEventIdFrom	Sets the first event identifier of a string of event identifiers that are a part of object parameters.
setEventIdQueryType	Sets a value that indicates whether event identifiers are stacked in a list or a string.
setEventIdTo	Sets the last event identifier of a string of event identifiers that are a part of object parameters.
setFilter	Sets a filter for search results in the audit trail.
setObjectScope	Sets a value that indicates whether object parameters are object identifiers, event identifiers or all.
setSessionQueryType	Sets a value that indicates whether session parameters are stacked in a list or a string.
setSessionScope	Sets a value that indicates whether session parameters are network addresses, usernames, computer names or all.
setSortOrder	Sets a value that indicates the sorting order of the audit trail depending on session parameters, object or date.
setUserNameFrom	Sets the first username of a string of usernames that are a part of session parameters.
setUserNameTo	Sets the last username of a string of usernames that are a part of session parameters.

## 5.4 Examples of use

The key feature of the IMiS®/Storage Connector interface is the transfer of objects between the application server and IMiS®/ARChive Server. The transfer means saving objects on the archive server and taking objects from the archive server.

### 5.4.1 Initializing IMiS®/Storage Connector

Running IMiS®/Storage Connector starts by initializing the `StorageConnector` instance.

This occurs the first time the `StorageConnector` class is used.

Getting an instance of the `StorageConnector` object follows these steps:

**.NET**

```
StorageConnector sc = StorageConnector.Instance;
```

**Java**

```
StorageConnector sc = StorageConnector.getInstance();
```

The instance is set and valid until finalization, which is described in the chapter [Finalizing IMiS®/Storage Connector](#). After finalization, the steps described above will return an undefined value.

### 5.4.2 Finalizing IMiS®/Storage Connector

Finalizing sees to the proper shutting down of the IMiS®/Storage Connector interface.

It is performed when the instance of the `StorageConnector` object is freed. This is done when the instance of the `StorageConnector` object is no longer used.

Freeing an instance of the `StorageConnector` object follows these steps:

**.NET**

```
StorageConnector.FreeInstance();
```

**Java**

```
StorageConnector.freeInstance();
```

With this method, the `StorageConnector` instance no longer exists. Obtaining an instance of the `StorageConnector` object as described in the previous section will return an undefined value.

For more information see chapter [Initializing IMiS®/Storage Connector](#).



### 5.4.3 Examples for IMiS®/ARChive Server version 7

This chapter will present some of the most frequent examples of ways IMiS®/Storage Connector is used with IMiS®/ARChive Server version 7. These are operations for opening the archive, saving and retrieving documents and providing data for the audit trail.

#### 5.4.3.1 Opening the archive

To open the archive, the following are needed: a *StorageConnector* instance (chapter [Initializing IMiS®/Storage Connector](#)), the network address of the server (host name or IP address) and a suitable port.

To open the archive with PreSharedKey authentication, a collection of additional option parameters must be created and sent to the method for opening the archive.

An example of opening the archive without authentication:

##### .NET

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;
string host = "iarc.acme.com";
int port = 16807;
Storage stg = sc.OpenIMiSARCStorage(host, port);
```

##### Java

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;
String host = "iarc.acme.com";
int port = 16807;
Storage stg = sc.openIMiSARCStorage(host, port);
```

An example of opening the archive with *PreSharedKey* authentication:

##### .NET

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;
string host = "iarc.acme.com";
int port = 16807;
IDictionary options = new SortedList();

options.Add(StorageConnector.OptionAuthType, AuthType.PreSharedKey);
options.Add(StorageConnector.OptionAuthKey, "psk1");

Storage stg = sc.OpenIMiSARCStorage(host, port, options);
```

**Java**

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;
String host = "iarc.acme.com";
int port = 16807;
Map options = new TreeMap();

options.put(StorageConnector.OPTION_AUTH_TYPE, new Integer(AuthType.PRE_SHARED_KEY));
options.put(StorageConnector.OPTION_AUTH_KEY, "psk1");

Storage stg = sc.openIMiSARCStorage(host, port, options);
```

**5.4.3.2 Saving objects**

Saving objects to the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address) and a port.  
For more information see chapter [Opening the archive](#).
- Saving the document to the archive as an object on the archive server.

**.NET**

```
Storage stg = IMIS_ARCHIVE_V7;
string fileName = "c:\acme.tif";
string profile = "Documents";

string objectId = stg.StoreObject(fileName, profile);
```

**Java**

```
Storage stg = IMIS_ARCHIVE_V7;
String fileName = "c:\acme.tif";
String profile = "Documents";

String objectId = stg.storeObject(fileName, profile);
```

### 5.4.3.3 Retrieving objects

Retrieving objects saved on the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a StorageConnector instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address) and port.  
For more information see chapter [Opening the archive](#).
- Retrieving a document listed with an object identifier from the archive server.

#### .NET

```
Storage stg = IMIS_ARCHIVE_V7;
string objectId = "e1aeed50688b8fd6df2b1aa93a8bd08620b7332561d84016b80428b69fe45e49";

string fileName = stg.RetrieveObject(objectId);
```

#### Java

```
Storage stg = IMIS_ARCHIVE_V7;
String objectId = "e1aeed50688b8fd6df2b1aa93a8bd08620b7332561d84016b80428b69fe45e49";

String fileName = stg.retrieveObject(objectId);
```

### 5.4.3.4 Providing data for the audit trail

The audit trail is a feature of IMiS®/ARChive Server. It is a log that records operations performed on objects. If this feature is enabled on the server, clients are required to provide audit information when opening the archive. This information must be provided through a collection of option parameters.

An example of opening the archive with an audit trail:

#### .NET

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;
string host = "iarc.acme.com";
int port = 16807;
IDictionary options = new SortedList();

options.Add(StorageConnector.OptionUserName, "MyUser");
options.Add(StorageConnector.OptionComputerName, "MyComputer");
options.Add(StorageConnector.OptionApplicationName, "MyApplication");

Storage stg = sc.OpenMiSARCStorage(host, port, options);
```

**Java**

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;
String host = "iarc.acme.com";
int port = 16807;
Map options = new TreeMap();

options.put(StorageConnector.OPTION_USER_NAME, "Test User");
options.put(StorageConnector.OPTION_COMPUTER_NAME, "Test Computer");
options.put(StorageConnector.OPTION_APPLICATION_NAME, "Test Application");

Storage stg = sc.openIMiSARCStorage(host, port, options);
```

An example of sending a user message for the audit trail when opening an object on the archive server:

**.NET**

```
Storage stg = IMIS_ARCHIVE_V7;
string objectId = "e1aeed50688b8fd6df2b1aa93a8bd08620b7332561d84016b80428b69fe45e49";
string message = "Revision of scanned document %s";
System.Collections.IList arguments = new ArrayList();
arguments.Add("Invoice 1234");

stg.AuditLog.Message = message;
stg.AuditLog.Arguments = arguments;

Document doc = stg.OpenObject(objectId, DocumentAccess.Read);
```

**Java**

```
Storage stg = IMIS_ARCHIVE_V7;
String objectId = "e1aeed50688b8fd6df2b1aa93a8bd08620b7332561d84016b80428b69fe45e49";
String message = "Revision of scanned document %s";
java.util.List arguments = new ArrayList();
argumentList.Add("Invoice 1234");

stg.AuditLog.Message = message;
stg.AuditLog.Arguments = arguments;

Document doc = stg.OpenObject(objectId, Document.MODE_READONLY);
```

## 5.4.4 Examples for IMiS®/ARChive Server version 9

This chapter will present some of the most frequent examples of ways IMiS®/Storage Connector is used with IMiS®/ARChive Server version 9. These are operations for opening the archive, creating entities, reading and editing metadata and content in the form of files and providing data for the audit trail.

### 5.4.4.1 Opening the archive

To open the archive, the following are needed: a StorageConnector instance (chapter [Initializing IMiS®/Storage Connector](#)), the network address of the server (host name or IP address) and a suitable port. To use the entity model on IMiS®/ARChive Server version 9 user authentication is mandatory, which is why a collection of additional option parameters must be created. The collection will be sent to the method for opening the archive.

An example of opening the archive with LocalCredentials authentication:

#### .NET

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;
string host = "iarc.acme.com";
int port = 16807;
IDictionary options = new SortedList();

options.Add(StorageConnector.OptionAuthType, AuthType.LocalCredentials);
options.Add(StorageConnector.OptionUserName, "User1");
options.Add(StorageConnector.OptionUserPassword, "Password1");

IArchive arc = sc.OpenArchive(ArchiveType.IMiSARChive, host, port, options);
```

#### Java

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;
String host = "iarc.acme.com";
int port = 16807;
Map options = new TreeMap();

options.put(StorageConnector.OPTION_AUTH_TYPE, AuthType.LOCAL_CREDENTIALS);
options.put(StorageConnector.OPTION_USER_NAME, "User1");
options.put(StorageConnector.OPTION_USER_PASSWORD, "Password1");

IArchive arc = sc.openArchive(ArchiveType.IMIS_ARCHIVE, host, port, options);
```

### 5.4.4.2 Public data about root classes

Retrieving public data about root classes on the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a StorageConnector instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).
- Retrieving public data about the root classes of the archive using the method in the *IArchive* interface.

An example of retrieving public data without collection sorting:

#### .NET

```
IArchive arc = IMIS_ARCHIVE_V9;  
  
ILargeReadOnlyList<IEntityStub> stubs = arc.GetRootClasses(null);
```

#### Java

```
IArchive arc = IMIS_ARCHIVE_V9;  
  
ILargeReadOnlyList<IEntityStub> stubs = arc.getRootClasses(null);
```

An example of retrieving public data with collection sorting by classification code:

#### .NET

```
IArchive arc = IMIS_ARCHIVE_V9;  
IList<EntitySortKey> sortKeys = new List<EntitySortKey> {  
    EntitySortKey.GetSystemPropertySortKey(SystemProperty.ClassificationCode, EntitySortKeyDirection.Ascending)  
};  
  
ILargeReadOnlyList<IEntityStub> stubs = arc.GetRootClasses(sortKeys);
```

#### Java

```
IArchive arc = IMIS_ARCHIVE_V9;  
List<EntitySortKey> sortKeys = Collections.singletonList(  
    EntitySortKey.GetSystemPropertySortKey(SystemProperty.CLASSIFICATION_CODE,  
    EntityCollection.SortDirection.ASCENDING));  
  
ILargeReadOnlyList<IEntityStub> stubs = arc.GetRootClasses(sortKeys);
```

### 5.4.4.3 Public data about an entity

Getting public data about an entity on the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).
- Getting public data about an entity identified with an identifier or classification code using the method in the *IArchive* interface.

An example of getting public data about a folder:

#### .NET

```
IArchive arc = IMIS_ARCHIVE_V9;  
string classificationCode = FOLDER_CLASS_CODE;  
  
IEntityStub stub = arc.GetEntityInfo(EntityIdKind.ClassificationCode, classificationCode);
```

#### Java

```
IArchive arc = IMIS_ARCHIVE_V9;  
string classificationCode = FOLDER_CLASS_CODE;  
  
IEntityStub stub = arc.getEntityInfo(EntityIdKind. CLASSIFICATION_CODE, classificationCode);
```

### 5.4.4.4 Public data about subentities

Viewing sub-entities through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).

- Getting public data about the selected entity on the archive through an identifier or a classification code.  
For more information see chapter [Public data about an entity](#).
- Viewing the public data of the child or sub-entities using the method in the *IEntityStub* interface.

An example of retrieving public data about sub-entities in a folder without collection sorting:

```
.NET  
IEntityStub stub = FOLDER_STUB;  
  
ILargeReadOnlyList<IEntityStub> stubs = stub.GetSubEntities(null);
```

```
Java  
IEntityStub stub = FOLDER_STUB;  
  
ILargeReadOnlyList<IEntityStub> stubs = stub.getSubEntities(null);
```

An example of retrieving public data about sub-entities with collection sorting by classification code:

```
.NET  
IEntityStub stub = FOLDER_STUB;  
IList<EntitySortKey> sortKeys = new List<EntitySortKey> {  
    EntitySortKey.GetSystemPropertySortKey(SystemProperty.ClassificationCode, EntitySortKeyDirection.Ascending)  
};  
  
ILargeReadOnlyList<IEntityStub> stubs = stub.GetSubEntities (sortKeys);
```

```
Java  
IEntityStub stub = FOLDER_STUB;  
List<EntitySortKey> sortKeys = Collections.singletonList(  
    EntitySortKey.GetSystemPropertySortKey(SystemProperty.CLASSIFICATION_CODE,  
    EntityCollection.SortDirection.ASCENDING));  
  
ILargeReadOnlyList<IEntityStub> stubs = stub.getSubEntities (sortKeys);
```



#### 5.4.4.5 Creating an entity

Creating an entity on the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).
- Creating an entity using the method in the *IArchive* interface or a specialized *IEntity* interface for a template listed with a unique template identifier.
- Setting required system metadata values such as the name of the entity.
- Choosing a retention policy if the parent entity doesn't already have a specified effective retention policy.
- Saving the entity on the archive.

An example of creating a class below the root archive using the *IArchive* interface:

##### .NET

```
IArchive arc = IMIS_ARCHIVE_V9;
string templateId = ROOT_CLASS_TEMPLATE;
string policyId = RETENTION_POLICY_ID;

IRetentionPolicy policy = arc.RetentionPolicies[policyId];

IClass cls = arc.CreateClass(templateId);

IRetention retention = cls.GetRetention(AccessMode.ReadWrite);
retention.AddPolicyEntry(policy);
retention.Save(true);

cls.Title = "A root class";
cls.Save();
```

**Java**

```

IArchive arc = IMIS_ARCHIVE_V9;
String templateId = ROOT_CLASS_TEMPLATE;
String policyId = RETENTION_POLICY_ID;

IRetentionPolicy policy = arc.getRetentionPolicies().get(policyId);

IClass cls = arc.createClass(templateId);

IRetention retention = cls.getRetention(AccessMode.READ_WRITE);
retention.addPolicyEntry(policy);
retention.save(true);

cls.setTitle("A root class");
cls.save();

```

An example of creating a class below a class using the *IArchive* interface:

**.NET**

```

IArchive arc = IMIS_ARCHIVE_V9;
string templateId = CLASS_TEMPLATE_ID;
string parentClassificationCode = PARENT_CLASS_CODE;

IClass cls = arc.CreateClass(templateId, EntityIdKind.ClassificationCode, parentClassificationCode);
cls.Title = "Class in class";
cls.Save();

```

**Java**

```

IArchive arc = IMIS_ARCHIVE_V9;
String templateId = CLASS_TEMPLATE_ID;
String parentClassificationCode = PARENT_CLASS_CODE;

IClass cls = arc.createClass(templateId, EntityIdKind.CLASSIFICATION_CODE, parentClassificationCode);
cls.setTitle("Class in class");
cls.save();

```

An example of creating a folder below a class using the *IClass* interface:

**.NET**

```

IClass cls = CLASS_ENTITY;
string templateId = FOLDER_TEMPLATE_ID;

IFolder folder = cls.CreateFolder(templateId);
folder.Title = "Folder in class";
folder.Save();

```

**Java**

```
IClass cls = CLASS_ENTITY;
String templateId = FOLDER_TEMPLATE_ID;

IFolder folder = cls.createFolder(templateId);
folder.setTitle("Folder in class");
folder.save();
```

An example of creating a document in a folder using the *IFolder* interface:

**.NET**

```
IFolder folder = FOLDER_ENTITY;
string templateId = DOCUMENT_TEMPLATE;

IDocument document = folder.CreateDocument(templateId);
document.Title = "Document in folder";
document.Save();
```

#### 5.4.4.6 Opening an entity

Opening an entity on the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).
- Opening an entity identified by an identifier or classification code using the method in *IArchive* for the selected access mode (read only or read and write) or opening an entity through the *IEntityStub* interface.

Example of opening a document in read only mode using the *IArchive* interface:

**.NET**

```
IArchive arc = IMIS_ARCHIVE_V9;
string classificationCode = DOCUMENT_CLASS_CODE;

IDocument document = arc.OpenDocument(EntityIdKind.ClassificationCode, classificationCode, AccessMode.Read);
```

**Java**

```
IArchive arc = IMIS_ARCHIVE_V9;
String classificationCode = DOCUMENT_CLASS_CODE;

IDocument document = arc.openDocument(EntityIdKind.CLASSIFICATION_CODE, classificationCode,
AccessMode.READ);
```

Example of opening a document in read only mode using the *IEntityStub* interface:

**.NET**

```
IEntityStub stub = DOCUMENT_STUB;

IDocument document = stub.Open(AccessMode.ReadWrite);
```

**Java**

```
IEntityStub stub = DOCUMENT_STUB;

IDocument document = stub.open(AccessMode.READ_WRITE);
```

#### 5.4.4.7 Moving an entity

Moving an entity on the archive with the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).
- Moving an entity to the selected parent entity (both entities (child and parent) are identified with their identifiers or classification codes) using the method in the *IArchive* interface or moving an entity using the the *IEntityStub* interface by giving the *IEntityStub* interface of the parent entity.

An example of moving a document using the *IArchive* interface:

**.NET**

```
IArchive arc = IMIS_ARCHIVE_V9;
string classificationCode = DOCUMENT_CLASS_CODE;
string parentClassificationCode = TARGET_FOLDER_CLASS_CODE;

arc.MoveEntity(EntityIdKind.ClassificationCode, classificationCode, EntityIdKind.ClassificationCode,
parentClassificationCode);
```

**Java**

```
IArchive arc = IMIS_ARCHIVE_V9;
string classificationCode = DOCUMENT_CLASS_CODE;
string parentClassificationCode = TARGET_FOLDER_CLASS_CODE;

arc.moveEntity(EntityIdKind.CLASSIFICATION_CODE, classificationCode, EntityIdKind.CLASSIFICATION_CODE,
parentClassificationCode);
```

An example of moving a document using the *IEntityStub* interface:

**.NET**

```
IEntityStub stub = DOCUMENT_STUB;
IEntityStub parentStub = TARGET_FOLDER_STUB;

stub.Move(parentStub);
```

**Java**

```
IEntityStub stub = DOCUMENT_STUB;
IEntityStub parentStub = TARGET_FOLDER_STUB;

stub.move(parentStub);
```

#### 5.4.4.8 Deleting an entity

Deleting an entity on the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).

- Deleting an entity identified with an identifier or classification code from the archive using the method in the *IArchive* interface or using the *IEntityStub* interface.

An example of deleting a document using the *IArchive* interface:

**.NET**

```
IArchive arc = IMIS_ARCHIVE_V9;  
string classificationCode = DOCUMENT_CLASS_CODE;  
  
arc.DeleteEntity(EntityIdKind.ClassificationCode, classificationCode);
```

**Java**

```
IArchive arc = IMIS_ARCHIVE_V9;  
string classificationCode = DOCUMENT_CLASS_CODE;  
  
arc.deleteEntity(EntityIdKind.CLASSIFICATION_CODE, classificationCode);
```

An example of deleting a document using the *IEntityStub* interface:

**.NET**

```
IEntityStub stub = DOCUMENT_STUB;  
  
stub.Delete();
```

**Java**

```
IEntityStub stub = DOCUMENT_STUB;  
  
stub.delete();
```

#### 5.4.4.9 Viewing and editing data about an entity

Viewing and editing data about an entity on the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).
- Opening the entity on the archive with an identifier or a classification code.  
For more information see chapter [Opening an entity](#).

- Viewing and editing metadata values associated with the unique name of the entity.
- Saving any changes made to the content of the entity using the Save method in the entity.

An example of viewing and editing the metadata of an entity:

#### .NET

```
IEntityStub doc = DOCUMENT_ENTITY;
string propertyName = CUSTOM_STRING_PROPERTY_NAME;

string propertyValue = doc.Properties[propertyName].GetValue();
System.Console.WriteLine(propertyValue);

doc.Properties[propertyName].SetValue("New custom value");
doc.Save();

propertyValue = doc.Properties[propertyName].GetValue();
System.Console.WriteLine(propertyValue);
```

#### Java

```
IEntityStub doc = DOCUMENT_ENTITY;
String propertyName = CUSTOM_STRING_PROPERTY_NAME;

String propertyValue = doc.properties.get(propertyName).getValue();
System.out.println(propertyValue);

doc.getProperties().get(propertyName).setValue("New custom value");
doc.save();

propertyValue = doc.getProperties().get(propertyName).getValue();
System.out.println(propertyValue);
```

#### 5.4.4.10 Saving records to a document

Saving a file to the content of a document on the archive using the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).

- Opening the entity on the archive with an identifier or a classification code.  
For more information see chapter [Opening an entity](#).
- Creating a file on the archive using the method in the *IDocument* interface and providing the suitable content type (MIME).
- Copying the file content to the archive using the data stream.
- Assigning the file to the content of a document.
- Saving any changes made to the content of the entity using the *Save* method in the document.

An example of saving a file in the content of a document:

```
.NET
IDocument doc = DOCUMENT_ENTITY;
string fileName = "c:\\Temp\\test.tif ";
string contentType = "image/tiff";

IContentPart contentPart = doc.CreateContentPart(contentType);
Stream contentPartStream = contentPart.OpenDataStream(AccessMode.ReadWrite);
try {
    FileStream fileStream = new FileStream(fileName, FileMode.Open);
    try {
        int len;
        byte[] buffer = new byte[8192];
        while (0 < (len = fileStream.Read(buffer, 0, buffer.Length)))
            contentPartStream.Write(buffer, 0, len);
        contentPartStream.Flush();
    }
    finally {
        fileStream.Close();
    }
}
finally {
    contentPartStream.Close();
}

IList<IContentPart> contentParts = doc.Content.GetParts();
contentParts.Add(contentPart);
content.SetParts(contentParts);

doc.Save();
```



**Java**

```
IDocument doc = DOCUMENT_ENTITY;
String fileName = "c:\\Temp\\test.tif ";
String contentType = "image/tiff";

IContentPart contentPart = doc.createContentPart(contentType);

OutputStream contentPartStream = contentPart.openDataOutputStream(false);
try {
    FileInputStream fileStream = new FileInputStream(fileName);
    try {
        int len;
        byte[] buffer = new byte[8192];
        while (0 < (len = fileStream.read(buffer, 0, buffer.length)))
            contentPartStream.write(buffer, 0, len);
        contentPartStream.flush();
    }
    finally {
        fileStream.close();
    }
}
finally {
    contentPartStream.close();
}
List<IContentPart> contentParts = doc.content.getParts();
contentParts.add(contentPart);
content.setParts(contentParts);

doc.Save();
```

**5.4.4.11 Moving content between documents**

Moving content between documents on the archive via the IMiS®/Storage Connector interface is done as follows:

- Obtain a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Open the archive with a network address (host name or IP address) and port, and authenticate the user.  
For more information see chapter [Opening the archive](#).

- Open the entity on the archive via an identifier or a classification code in the editing mode. For more information see chapter [Opening an entity](#).
- Move the selected content on the archive using *IContent* or *IContentPart* interface when forwarding an appropriate content identifier and target document identifier, as well as the name of the target document's file value;
- Save entity's content changes using *Save* on the document.

An example of opening a document to read via the *IArchive* interface:

**.NET**

```
IArchive arc = IMIS_ARCHIVE_V9;
string classificationCode = DOCUMENT_CLASS_CODE;
string targetClassificationCode = TARGET_CLASS_CODE;
string targetPropertyName = TARGET_PROPERTY_NAME;
string partId = CONTENT_PART_ID;

IDocument doc = arc.OpenDocument(EntityIdKind.ClassificationCode, classificationCode, AccessMode.ReadWrite);

foreach (IContentPart part in document.Content.GetParts()) {
    if (partId == part.Id) {
        part.Move(EntityIdKind.ClassificationCode, targetClassificationCode, targetPropertyName);
        break;
    }
}

doc.Save();
```

**Java**

```
IArchive arc = IMIS_ARCHIVE_V9;
String classificationCode = DOCUMENT_CLASS_CODE;
String targetClassificationCode = TARGET_CLASS_CODE;
String targetPropertyName = TARGET_PROPERTY_NAME;
String partId = CONTENT_PART_ID;

IDocument doc = arc.openDocument(EntityIdKind.CLASSIFICATION_CODE, classificationCode,
AccessMode.READ_WRITE);

for (IContentPart part : document.getContent().getParts()) {
    if (partId == part.getId()) {
        part.move(EntityIdKind.CLASSIFICATION_CODE, targetClassificationCode, targetPropertyName);
        break;
    }
}
```

```
doc.save();
```

An example of moving content between documents:

**.NET**

```
IDocument doc = DOCUMENT_ENTITY;
string fileName = "c:\\Temp\\test.tif ";
string contentType = "image/tiff";

IContentPart contentPart = doc.CreateContentPart(contentType);

Stream contentPartStream = contentPart.OpenDataStream(AccessMode.ReadWrite);
try {
    FileStream fileStream = new FileStream(fileName, FileMode.Open);
    try {
        int len;
        byte[] buffer = new byte[8192];
        while (0 < (len = fileStream.Read(buffer, 0, buffer.Length)))
            contentPartStream.Write(buffer, 0, len);
        contentPartStream.Flush();
    }
    finally {
        fileStream.Close();
    }
}
finally {
    contentPartStream.Close();
}

IList<IContentPart> contentParts = doc.Content.GetParts();
contentParts.Add(contentPart);
content.SetParts(contentParts);

doc.Save();
```

**Java**

```
IDocument doc = DOCUMENT_ENTITY;
String fileName = "c:\\Temp\\test.tif ";
String contentType = "image/tiff";

IContentPart contentPart = doc.createContentPart(contentType);

OutputStream contentPartStream = contentPart.openDataOutputStream(false);
try {
    FileInputStream fileStream = new FileInputStream(fileName);
    try {
        int len;
```

```
byte[] buffer = new byte[8192];
while (0 < (len = fileStream.read(buffer, 0, buffer.length)))
    contentPartStream.write(buffer, 0, len);
contentPartStream.flush();
}
finally {
    fileStream.close();
}
}
finally {
    contentPartStream.close();
}
List<IContentPart> contentParts = doc.content.getParts();
contentParts.add(contentPart);
content.setParts(contentParts);

doc.Save();
```

#### 5.4.4.12 Providing data for the audit trail

The audit trail is a feature of IMiS®/ARChive Server that creates a record of operations with objects.

If this functionality is enabled on the server, clients are required to provide audit information. A selection of option parameters is then used to deliver this information when opening the archive.

The user name and computer name are of key importance for the audit trail. The name of the application is currently used only when recording operations on the archive server itself.

An example of opening the archive with audit trail information:

```
.NET
StorageConnector sc = IMIS_STORAGE_CONNECTOR;
string host = "iarc.acme.com";
int port = 16807;
IDictionary options = new SortedList();

options.Add(StorageConnector.OptionUserName, "MyUser");
options.Add(StorageConnector.OptionComputerName, "MyComputer");
options.Add(StorageConnector.OptionApplicationName, "MyApplication");

IArchive arc = sc.OpenArchive(ArchiveType.IMiSARChive, host, port, options);
```

**Java**

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;
String host = "iarc.acme.com";
int port = 16807;
Map options = new TreeMap();

options.put(StorageConnector.OPTION_USER_NAME, "MyUser");
options.put(StorageConnector.OPTION_COMPUTER_NAME, "MyComputer");
options.put(StorageConnector.OPTION_APPLICATION_NAME, "MyApplication");

IArchive arc = sc.openArchive(ArchiveType.IMIS_ARCHIVE, host, port, options);
```

An example of sending a user message for the audit trail when performing the opening operation on the archive server:

**.NET**

```
IArchive arc = IMIS_ARCHIVE_V9;
string classificationCode = DOCUMENT_CLASS_CODE;
string message = "Revision of scanned document %s";
System.Collections.IList arguments = new ArrayList();
arguments.Add("Invoice 1234");

stg.AuditLog.Message = message;
stg.AuditLog.Arguments = arguments;

IDocument doc = arc.OpenDocument(EntityIdKind.ClassificationCode, classificationCode);
```

**Java**

```
IArchive arc = IMIS_ARCHIVE_V9;
string classificationCode = DOCUMENT_CLASS_CODE;
string message = "Revision of scanned document %s";
List arguments = new ArrayList();
arguments.add("Invoice 1234");

stg.getAuditLog().setMessage(message);
stg.getAuditLog().setArguments(arguments);

IDocument doc = arc.openDocument(EntityIdKind.CLASSIFICATION_CODE, classificationCode);
```

#### 5.4.4.13 Public data of reviews

Retrieving public data of a review on the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name and IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).
- Retrieving public data about all or only selected reviews, identified with an identifier or classification code using the method in the *IArchive* interface.

An example of retrieving public data of all reviews without collection sorting:

```
.NET
IArchive arc = IMIS_ARCHIVE_V9;

ILargeReadOnlyList<IReviewStub> reviewStubs = arc.GetReviews(null);
```

```
Java
IArchive arc = IMIS_ARCHIVE_V9;

ILargeReadOnlyList<IReviewStub> reviewStubs = arc.getReviews(null);
```

An example of retrieving public data about all reviews with collection sorting by classification code:

```
.NET
IArchive arc = IMIS_ARCHIVE_V9;
IList<EntitySortKey> sortKeys = new List<EntitySortKey> {
    EntitySortKey.GetSystemPropertySortKey(SystemProperty.ClassificationCode, EntitySortKeyDirection.Ascending)
};
ILargeReadOnlyList<IReviewStub> reviewStubs = arc.GetReviews(sortKeys);
```

**Java**

```
IArchive arc = IMIS_ARCHIVE_V9;
List<EntitySortKey> sortKeys = Collections.singletonList(
    EntitySortKey.GetSystemPropertySortKey(SystemProperty.CLASSIFICATION_CODE,
    EntityCollection.SortDirection.ASCENDING));

ILargeReadOnlyList<IReviewStub> reviewStubs = arc.getReviews(sortKeys);
```

An example of retrieving public data about a selected review:

**.NET**

```
IArchive arc = IMIS_ARCHIVE_V9;
string classificationCode = REVIEW_CLASS_CODE;

IReviewStub reviewStub = arc.GetReviewInfo(EntityIdKind.ClassificationCode, classificationCode);
```

**Java**

```
IArchive arc = IMIS_ARCHIVE_V9;
string classificationCode = REVIEW_CLASS_CODE;

IReviewStub reviewStub = arc.getReviewInfo(EntityIdKind.CLASSIFICATION_CODE, classificationCode);
```

#### 5.4.4.14 Creating a review

Creating a review on the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).
- Creating a review through one of the methods on the *IArchive* interface.
- Setting required system metadata values such as the address and members of the commission in the review;
- Saving the review on the archive.

An example of creating a review with selected retention policies through the *IArchive* interface:

**.NET**

```
IArchive arc = IMIS_ARCHIVE_V9;
string templateId = ROOT_CLASS_TEMPLATE;
IList<string> members = MEMBERS;
IEntityStub scopeEntity = SCOPE_ENTITY;
ICollection<IRetentionPolicy> retentionPolicies = RETENTION_POLICIES;

IReview review = arc.CreateReview(scopeEntity, retentionPolicies);
review.Title = "A review";
review.Members = members;
review.Save();
```

**Java**

```
IArchive arc = IMIS_ARCHIVE_V9;
String templateId = ROOT_CLASS_TEMPLATE;
List<String> members = MEMBERS;
IEntityStub scopeEntity = SCOPE_ENTITY;
Collection<IRetentionPolicy> retentionPolicies = RETENTION_POLICIES;

IReview review = arc.createReview(scopeEntity, retentionPolicies);
review.setTitle("A review");
review.setMembers(members);
review.save();
```

An example of creating a review with a selected query through the *IArchive* interface:

**.NET**

```
IArchive arc = IMIS_ARCHIVE_V9;
string templateId = ROOT_CLASS_TEMPLATE;
IList<string> members = MEMBERS;
IEntityStub scopeEntity = SCOPE_ENTITY;
string queryExpression = QUERY_EXPRESSION;

IReview review = arc.CreateReview(scopeEntity, queryExpression);
review.Title = "A review";
review.Members = members;
review.Save();
```



**Java**

```

IArchive arc = IMIS_ARCHIVE_V9;
String templateId = ROOT_CLASS_TEMPLATE;
List<String> members = MEMBERS;
IEntityStub scopeEntity = SCOPE_ENTITY;
String queryExporeession = QUERY_EXPRESSION;

IReview review = arc.createReview(scopeEntity, queryExporeession);
review.setTitle("A review");
review.setMembers(members);
review.save();

```

**5.4.4.15 Opening a review**

Opening a review on the archive through the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).
- Opening a review identified by an identifier or classification code using the method in *IArchive* for the selected access mode (read only or read and write) or opening a review through the *IReviewStub* interface.

An example of opening a review for reading through the *IArchive* interface:

**.NET**

```

IArchive arc = IMIS_ARCHIVE_V9;
string classificationCode = REVIEW_CLASS_CODE;

IReview review = arc.OpenReview(EntityIdKind.ClassificationCode, classificationCode, AccessMode.Read);

```

**Java**

```

IArchive arc = IMIS_ARCHIVE_V9;
String classificationCode = REVIEW_CLASS_CODE;

IReview review = arc.openReview(EntityIdKind.CLASSIFICATION_CODE, classificationCode, AccessMode.READ);

```

An example of opening a review for reading and writing through the *IReviewStub* interface:

**.NET**

```
IReviewStub reviewStub = DOCUMENT_STUB;  
  
IReview review = reviewStub.Open(AccessMode.ReadWrite);
```

**Java**

```
IReviewStub reviewStub = DOCUMENT_STUB;  
  
IReview review = reviewStub.open(AccessMode.READ_WRITE);
```

#### 5.4.4.16 Searching the archive

IMiS®/ARChive Server version 9 enables searching by entity metadata and/or the full text of archived records. Searching can be performed on the entire archive or just in a selected entity in the classification scheme. Searching the archive using the IMiS®/Storage Connector interface takes place in the following steps:

- Obtaining a *StorageConnector* instance.  
For more information see chapter [Initializing IMiS®/Storage Connector](#).
- Opening the archive with a network address (host name or IP address), a port and user authentication.  
For more information see chapter [Opening the archive](#).
- Viewing public data about an entity (chapter [Public data about an entity](#))  
or using an identifier or classification code to open the entity (chapter [Opening an entity](#))  
under which the user would like to perform the search.
- Searching the archive using the method in the *IArchive* interface or searching below the selected entity using the method in the *IEntityStub* or *IEntity* interface.

An example of searching the entire archive for classes and folders whose names start with the letter A:

**.NET**

```
IArchive arc = IMIS_ARCHIVE_V9;
EntityFilter filter = new EntityFilter(EntityTypeFilter.Classes | EntityTypeFilter.Folders, null);
ICollection<EntitySortKey> sortKeys = null;
SearchOptions options = SearchOptions.Recursive;
string expression = String.Format("{0}=\{1} \\",
arc.GetSystemPropertyName(SystemProperty.Title), "A*");

ILargeReadOnlyList<IEntityStub> stubs = arc.Search(filter, sortKeys, options, expression);
```

**Java**

```
IArchive arc = IMIS_ARCHIVE_V9;
EntityFilter filter = new EntityFilter(EnumSet.of(EntityFilter.CLASSES, EntityFilter.FOLDERS), null);
Collection<EntitySortKey> sortKeys = null;
SearchOptions options = SearchOptions.RECURSIVE;
String expression = MessageFormat.format("{0}=\{1} \\",
arc.getSystemPropertyName(SystemProperty.TITLE), "A*");

ILargeReadOnlyList<IEntityStub> stubs = arc.search(filter, sortKeys, options, expression);
```

An example of searching for documents containing the word “invoice” below a specified folder:

**.NET**

```
IEntityStub stub = FOLDER_STUB;
EntityFilter filter = EntityFilter.Documents;
ICollection<EntitySortKey> sortKeys = new List<EntitySortKey> {
EntitySortKey.GetSystemPropertySortKey(SystemProperty.Title, EntitySortKeyDirection.Ascending)
};
SearchOptions options = SearchOptions.Recursive;
string expression = String.Format("{0}", "Invoice");

ILargeReadOnlyList<IEntityStub> stubs = stub.Search(filter, sortKeys, options, expression);
```

**Java**

```

IEntityStub stub = FOLDER_STUB;
EntityFilter filter = EntityFilter.DOCUMENTS;
List<EntitySortKey> sortKeys = Collections.singletonList(
EntitySortKey.GetSystemPropertySortKey(SystemProperty.CLASSIFICATION_CODE,
EntityCollection.SortDirection.ASCENDING));
SearchOptions options = SearchOptions.RECURSIVE;
string expression = MessageFormat.format("{{{0}}}", "Invoice");

ILargeReadOnlyList<IEntityStub> stubs = stub.search(filter, sortKeys, options, expression);

```

An example of searching the metadata and full text of documents below a specified folder for documents whose title starts with the letter A and that contain the word "invoice":

**.NET**

```

IArchive arc = IMIS_ARCHIVE_V9;
IEntityStub stub = FOLDER_STUB;
EntityFilter filter = EntityFilter.Documents;
ICollection<EntitySortKey> sortKeys = new List<EntitySortKey> {
EntitySortKey.GetSystemPropertySortKey(SystemProperty.Title, EntitySortKeyDirection.Ascending)
};
SearchOptions options = SearchOptions.Recursive;
string expression = String.Format("{{{0}}}=\ '{1} \' AND {{{2}}}", arc.GetSystemPropertyName(SystemProperty.Title),
"A*", "Invoice");

ILargeReadOnlyList<IEntityStub> stubs = stub.Search(filter, sortKeys, options, expression);

```

**Java**

```

IEntityStub stub = FOLDER_STUB;
EntityFilter filter = EntityFilter.DOCUMENTS;
List<EntitySortKey> sortKeys = Collections.singletonList(
EntitySortKey.GetSystemPropertySortKey(SystemProperty.CLASSIFICATION_CODE,
EntityCollection.SortDirection.ASCENDING));
SearchOptions options = SearchOptions.RECURSIVE;
string expression = MessageFormat.format("{{{0}}}", "Invoice");

ILargeReadOnlyList<IEntityStub> stubs = stub.search(filter, sortKeys, options, expression);

```

## 5.4.5 Logging IMiS®/Storage Connector

Logging or creating records of the operations of IMiS®/Storage Connector is an important function for administrators and application developers. It serves to monitor operations and pinpoint and solve problems that may arise during use.

The interface supports two logging methods. The first is so-called internal logging to a rotating log file at a specified location with records in a predefined form. The second method is based on the specific needs of the user. The user can specify the handlers of records (a log file, console window, etc.) and customize the form of records to suit their needs (for example, records can be in plain text format or XML format).

### 5.4.5.1 Internal logging

IMiS®/Storage Connector enables internal logging, which means that the program sees to the creation of records on its operations. These records are saved to a rotating log file at a predefined location in the file system.

Internal logging is supported through a *StorageConnector* instance (chapter [Initializing IMiS®/Storage Connector](#)) and takes place in the following way:

```
.NET  
StorageConnector sc = IMIS_STORAGE_CONNECTOR;  
  
sc.LogInternal = true;
```

```
Java  
StorageConnector sc = IMIS_STORAGE_CONNECTOR;  
  
sc.logInternal(true);
```

If the IMiS®/Storage Connector .NET interface is being used, the log file is rotating and is located in the system temporary directory. The name of the log files is equal to *IMiS.StorageConnector.NET.X.log*, where X represents a generated number separating the different rotating log files.

A rotating log file is also used with IMiS®/Storage Connector Java. The name of the log files is equal to *IMiS.StorageConnector.Java.X.log*, where X represents a generated number separating the different log files. Location:

- On Windows systems it is located in the system temporary directory (the path is returned by the *System.getProperty("java.io.tmpdir")* method).
- Otherwise it is located in the user's home directory (the path is returned by the *System.getProperty("user.home")* method).

The number of rotating log files is limited to 10, and each file has a size limit of roughly 1 MB.

### 5.4.5.2 Custom logging

Users can customize logging in IMiS®/Storage Connector to suit their specific needs by using their own handlers for creating records on product operations. The pre-implemented handlers in the .NET Framework or Java can be used, or the user can implement their own handlers.

If the IMiS®/Storage Connector .NET version is being used, the handlers must be based on the *System.Diagnostics.TraceListener* abstract class. Additional information about this class is available on Microsoft's website:

[http://msdn.microsoft.com/en-us/library/system.diagnostics.tracelistener\(v=vs.100\).aspx](http://msdn.microsoft.com/en-us/library/system.diagnostics.tracelistener(v=vs.100).aspx).

Some handlers are already implemented in the .NET Framework, including:

- *System.Diagnostics.TextWriterTraceListener*, which creates a record to a file or to the data stream.
- *System.Diagnostics.ConsoleTraceListener*, which writes to the console window.
- *System.Diagnostics.EventLogTraceListener*, which writes to the system event log.

A handler in IMiS®/Storage Connector .NET can also be based on the *IMiS.Diagnostics.LogHandler* abstract class. This class derives from the *System.Diagnostics.TraceListener* class and provides additional options for customizing reports. It is located in the *imibase.net.dll* library, which is part of IMiS®/Storage Connector .NET.

An example of implementing a handler derived from the *IMiS.Diagnostics.LogHandler* class would be *IMiS.Diagnostics.FileLogHandler*. This will write to a file and will also be used in internal logging. For more information see chapter [Internal logging](#).

If the IMiS®/Storage Connector Java version is being used, the handler must derive from the *java.util.logging.Handler* abstract class. Additional information about this class is available on Oracle's website: <http://docs.oracle.com/javase/1.5.0/docs/>

Examples of handlers implemented in Java include:

- *java.util.logging.FileHandler*, which writes to a file.
- *java.util.logging.ConsoleHandler*, which writes to the console window.
- *java.util.logging.SocketHandler*, which writes over the network.

Custom logging is enabled through the *StorageConnector* instance (chapter [Initializing IMiS®/Storage Connector](#)); the administrator creates a handler and adds it to the list of handlers.

An example of creating a handler that writes to a file:

**.NET**

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;  
string fileName = @"c:\isc.log";  
IMiS.Diagnostics.FileLogHandler fileLog = new FileLogHandler(fileName, "My File Log", 1000000, 10,  
FileLogOptions.Append);  
  
sc.LogHandlers.Add(fileLog);
```

**Java**

```
StorageConnector sc = IMIS_STORAGE_CONNECTOR;  
String fileName = "/isc.log";  
java.util.logging.FileHandler fileLog = new FileHandler(fileName, 1000000, 10, true);  
  
sc.logAddHandler(fileLog);
```

### 5.4.5.3 Logging levels

IMiS®/Storage Connector enables different levels of logging. The Administrator can set limits on which types of records of operational events are created in the log file or in some other handler.

*Example: An administrator can choose to record only errors and information about the system (the default setting) or they can choose to keep records on even the most minute aspects of system operations.*

Generally speaking, less logging means, among other things, faster logging. However, in the event that problems arise in system use it might be beneficial to change the level of logging. It is a good idea to set logging to the most detailed level and to repeat the events that led to the issue.

If an administrator cannot successfully resolve the issues by analyzing the log, we advise him or her to send it, along with a description of the problem, to [support@imis.eu](mailto:support@imis.eu).

The following constants are used to set the logging level:

.NET : Property	Description
SourceLevels.Off	Logging disabled.
SourceLevels.Critical	Logging level that only records critical errors.
SourceLevels.Error	Logging level that records common and critical errors.
SourceLevels.Warning	Logging level that records warnings and common and critical errors.
SourceLevels.Information	Logging level that records informational records, warnings and common and critical errors.
SourceLevels.Verbose	Logging level that records details on operations, informational records, warnings and common and critical errors.
SourceLevels.All	Logging level that records all events.



Java : Method	Description
Level.OFF	Logging disabled.
Level.SEVERE	Logging level that only records errors.
Level.WARNING	Logging level that records warnings and errors.
Level.INFO	Logging level that records informational records, warnings and errors.
Level.FINE	Logging level that records details on operations, informational records, warnings and common and critical errors.
Level.FINER	Logging level that records details on operations, informational records, warnings and common and critical errors.
Level.FINEST	Logging level that records details on operations, informational records, warnings and common and critical errors.
Level.ALL	Logging level that records all events.

The logging level is set using the *StorageConnector* instance (chapter [Initializing IMiS®/Storage Connector](#)). One of the constants listed above is used, as the example below shows.

Example of setting logging to the most detailed level:

```
.NET
StorageConnector sc = IMIS_STORAGE_CONNECTOR;

sc.LogLevel = System.Diagnostics.SourceLevels.Verbose;
```

```
Java
StorageConnector sc = IMIS_STORAGE_CONNECTOR;

sc.logSetLevel(java.util.logging.Level.FINEST);
```

## 6 TROUBLESHOOTING

### 6.1 Problems using IMiS®/Storage Connector .NET version

Below, issues frequently encountered when using IMiS®/Storage Connector are described and instructions for resolving them are given.

#### 6.1.1 Issues with references in a development project

When developing applications with IMiS®/Storage Connector .NET usually a reference to the *storageconnector.net.dll* library is not sufficient.

*Example: If an administrator in a development project would like to catch errors specific to the interface, when attempting to create a binary code (build)..*

```
.NET
try {
...
}
catch (StorageConnectorException ex) {
...
}
```

...the following error occurs:

- 1) The type 'IMiS.GlobalizedException' is defined in an assembly that is not referenced. You must add a reference to assembly 'imisbase.net, Version=2.0.0.0, Culture=neutral, PublicKeyToken=51833a6f82ea576f'
- 2) The type caught or thrown must be derived from System.Exception

Cause of the problem: In a development project, the development environment requires a reference to the library containing the unknown class in the error description.

In this example, the unknown class is defined in the *misbase.net.dll* library, which is not listed in the references of the development project.

This class is a basic class for all types of errors in IMiS® software on the .NET platform.

```
System.Exception
IMiS.BaseException
    IMiS.GlobalizedException
        IMiS.StorageConnector.StorageConnectorException
```

Resolving the problem: a reference to the *imisbase.net.dll* library must be added to the references in the development project, as this library is also a part of the interface.

## 6.2 Problems using IMiS®/Storage Connector Java version

### 6.2.1 Issues with references in a development project

When developing applications with IMiS®/Storage Connector Java usually a reference to the *storageconnector.jar* library in the *classpath* of the development project is not sufficient. If the application developer is using a method that can return an error specific to this interface, as shown below...

```
Java
static Storage openIMiSARCStorage(String host, int port)
    throws StorageConnectorException
{
    // opening the archive with an instance of IMiS/Storage Connector Java
    return sc.openIMiSARCStorage(host, port);
}
```

...the following error occurs:

*No exception of type StorageConnectorException can be thrown; an exception type must be a subclass of Throwable*

Cause of the problem: In a development project, the development environment requires a reference to the library containing the unknown class in the error description. In this example, this class is the basic class for all types of errors in IMiS® software on the Java platform.

This class is specified in the *imisbase.jar* library, which is not listed in the *classpath* of the development project.

*java.lang.Throwable*

*java.lang.Exception*

*com.imis.GlobalizedException*

*com.imis.storageconnector.StorageConnectorException*

Resolving the problem: A reference to the *imisbase.jar* library must be added to the classpath, as this library is also a part of the IMiS®/Storage Connector Java interface.

## 6.2.2 Issues with unhandled errors

If an application developer calls up an IMiS®/Storage Connector Java method that could return an error as shown below...

```
Java
static Storage openMiSARCStorage(String host, int port)
{
    // opening the archive with an instance of IMiS/Storage Connector Java
    return sc.openMiSARCStorage(host, port);
}
```

...the following error occurs:

*Unhandled exception type StorageConnectorException*

*Cause of the problem:* Java identifies two types of errors: checked and unchecked.

Checked errors are those errors that are not derived from the *java.lang.Error* or even the *java.lang.RuntimeException* classes and which must therefore be processed within a method or listed together with a method declaration.

In the above example, the error that could be caused by the called up method is a checked error, which is why Java tells the user the error is unhandled.

*Resolving the problem:* When working with a checked error, it must be listed either with a method declaration or with a *throws* sentence...

```
Java
static Storage OpenMiSARCStorage(String host, int port)
    throws StorageConnectorException
{
    // opening the archive with an instance of IMiS/Storage Connector Java
    return sc.openMiSARCStorage(host, port);
}
```

...or handled within the method:

```
Java
static Storage OpenMiSARCStorage(String host, int port)
{
    Storage stg = null;
    try {
        // opening the archive with an instance of IMiS/Storage Connector Java
        stg = sc.openMiSARCStorage(host, port);
    }
    catch (StorageConnectorException e) {
        // ..
    }
    return stg;
}
```

### 6.2.3 Problems opening a session between the server and a client

When IMiS®/Storage Connector Java is running, an error may occur when setting up a session between IMiS®/ARChive Server and a client using the interface.

Operations on the archive where this issue could occur are creating, opening or deleting objects.

The issue is logged in the log as follows:

```
Java
com.imis.storageconnector.StorageConnectorException: Error occurred while opening session on IMiS/ARC Server
<iarc.acme.com:16807>
...
com.imis.imisarc.client.IAClientException: Authentication between server and client failed.
...
```

*Cause of the problem:* The issue could be caused by improper *Java Cryptography Extension (JCE)* policy files, which usually do not have the required 192/256-byte AES encryption if the *Java Runtime Environment (JRE)* was installed normally due to legal constraints in the US regarding the export of cryptographic products.

*Resolving the problem:* *JCE policy* files need to be upgraded to *Java JVM*.

With Sun Microsystems JRE, *JCE policy* files are available on Oracle's website:

[http://www.oracle.com/technetwork/java/javasebusiness/downloads/java-archive-downloads-java-plat-419418.html#jce\\_policy-1.5.0-oth-JPR](http://www.oracle.com/technetwork/java/javasebusiness/downloads/java-archive-downloads-java-plat-419418.html#jce_policy-1.5.0-oth-JPR)

If IBM JRE is used, the appropriate IBM JCE policy files can be found on IBM's website:

<https://www14.software.ibm.com/webapp/iwm/web/preLogin.do?source=jcesdk>

The *JCE policy* files replace existing files in the JRE Security directory...

```
<java-home>/lib/security           [in Java 2 Runtime Environment]
<java-home>/jre/lib/security       [in Java 2 SDK]
```

...where *<java-home>* represents the directory where JRE or JDK is installed.

## 6.2.4 Problems with log editing rights

When activating IMiS®/Storage Connector Java, a problem may occur due to restrictions in the rights settings in the Java environment.

The problem is logged as follows in the system log:

Java
<pre>java.security.AccessControlException: access denied (java.util.logging.LoggingPermission control)   at java.security.AccessControlContext.checkPermission( AccessControlContext.java:269)   at java.security.AccessController.checkPermission( AccessController.java:401)   at java.lang.SecurityManager.checkPermission(SecurityManager.java:524)   at java.util.logging.LogManager.checkAccess(LogManager.java:834)   at java.util.logging.Handler.checkAccess(Handler.java:276)   at java.util.logging.FileHandler.&lt;init&gt;(FileHandler.java:329)   at com.imis.storageconnector.StorageConnectorLogger.setInternalLogging(   StorageConnectorLogger.java:174)   at com.imis.storageconnector.StorageConnector.logInternal( StorageConnector.java:608)   ...</pre>

*Cause of the problem:* The problem pertains to excluded rights for logging in the Java environment. Specifically, the *java.util.logging.LoggingPermission* right has not been included in the *Java Authentication and Authorization Service (JAAS) policy* file.

*Resolving the problem:* The system or user policy file must be fixed to include the right or permission to write in the log (*java.util.logging.LoggingPermission*).

The example below shows how to resolve internal logging problems in a project that uses IMiS®/Storage Connector Java in a Windows environment where the system policy file is replaced with a user file.

To successfully write in the log, which is created in the system temporary directory on Windows systems (chapter [Internal logging](#)), besides the right to write in the log the right to read the *java.io.tmpdir* system values and the right to read, write and delete in the system temporary directory must be specified.

```
Java
grant codeBase "file:/C:/IMiS/iscjavatest/-" {
    permission java.util.PropertyPermission "java.io.tmpdir", "read";
        permission java.io.FilePermission "${java.io.tmpdir}{/}-", "read,write,delete";
    permission java.util.logging.LoggingPermission "control";
};
```

Additional information on permissions and policy files in Java is available on Oracle's website at the following links: <http://docs.oracle.com/javase/1.5.0/docs/>

## 6.3 List of errors that may occur when using IMiS®/Storage Connector

Below, frequent errors that could occur when using the IMiS®/Storage Connector interface are listed. Each description is followed by the cause of the error and instructions on how to deal with the error.

### 6.3.1 Errors in IMiS®/ARChive Server 7

#### **Demo license expired.**

This notification means that the demo version of IMiS®/Storage Connector .NET or Java has expired. To renew the demo version, contact [info@imis.eu](mailto:info@imis.eu).

#### **Feature/method is currently not supported.**

This notification means that the feature or method that returned the error is currently not supported or implemented.

**Error occurred while opening a session.**

This notification informs the user that an error occurred when attempting to establish a connection with IMiS®/ARChive Server.

The cause of the error could be an incorrectly listed host name or port, an error determining the IP address from the host name, a network connection error, an unresponsive server, an invalid server response, an error sent by the server when establishing the connection or failed authentication between the server and the client. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while creating an object on IMiS/ARC Server <host> (profile=<profile\_name> mime=<mime\_type>).**

This notification tells the user that an error occurred when attempting to create an object on IMiS®/ARChive Server using *Storage.CreateObject()* (.NET) or *Storage.createObject()* (Java).

The cause of the error could be an incorrect profile or MIME type, an interrupted connection, an error sent by the server when creating the object or an error associated with the server's compression library. This error is critical, and there is a chance that the product manufacturer will need to intervene.

We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while opening object <object\_identifier> on IMiS®/ARC Server <host> in mode <access\_mode>.**

This notification tells the user that an error occurred when attempting to open an object on IMiS®/ARChive Server using *Storage.OpenObject()* (.NET) or *Storage.openObject()* (Java).

The cause of the error could be an incorrect object identifier, an interrupted connection, an error sent by the server when opening the object or an error associated with the server's compression library. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).



**Error occurred while committing object <object\_identifier> changes on IMiS/ARC Server <host>.**

This notification means that an error occurred when saving an object on IMiS®/ARChive Server using the *Document.Save()*(.NET) or *Document.save()*(Java) method. The error could be caused by an interrupted connection, a connection error or an error on the server, or the object could already be closed. It would be a good idea to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu) for further analysis.

**Error occurred while moving object <object\_identifier> on IMiS/ARC Server <host> to new profile <profile\_name>.**

This notification tells the user that an error occurred when attempting to move an object on IMiS®/ARChive Server using *Storage.MoveObject()*(.NET) or *Storage.moveObject()*(Java). This error occurs because this feature is not supported.

**Error occurred while removing object <object\_identifier> on IMiS®/ARChive Server <host>.**

This notification tells the user that an error occurred when attempting to delete an object on IMiS®/ARChive Server using *Storage.DeleteObject()*(.NET) or *Storage.deleteObject()*(Java). The cause of the error could be an incorrect object identifier, an interrupted connection or an error sent by the server when deleting the object. This error could represent a problem that requires the product manufacturer's intervention. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while closing object <object\_identifier> on IMiS/ARC Server <host>.**

This notification means that an error occurred when closing an object on IMiS®/ARChive Server using the *Document.Close()*(.NET) or *Document.close()*(Java) method. The error could be caused by an interrupted connection or an error sent by the server when closing the object, or the object could already be closed. In theory this error does not represent a major problem; it would however be a good idea to send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu) for further analysis.

**Object identifier is not valid until new object is saved.**

This notification means that an object identifier was requested through *Document.Id()* (.NET) or *Document.getId()* (Java), but the object was just created on IMiS®/ARChive Server and has yet to be saved. An object does not have a valid identifier until it is saved. This error does not represent a serious problem. It is just a warning about correct program use.

**Operation on closed object is not allowed.**

This notification means that the object that returned this error when the method was called up was already closed using the *Document.Close()* (.NET) or *Document.close()* (Java) method. This error does not represent a serious problem. It is just a warning about correct program use.

**Operation on closed storage is not allowed.**

This notification means that the archive that returned this error when the method was called up was already closed using the *Storage.Close()* (.NET) or *Storage.close()* (Java) method. This error does not represent a serious problem. It is just a warning about correct program use.

**File has no extension which is required if MIME type is not provided!**

This notification tells the user that an error occurred when attempting to save an object on IMiS®/ARChive Server using *Storage.StoreObject()* (.NET) or *Storage.storeObject()* (Java). The error occurred because the provided file name does not have an extension and the MIME type was not provided. This error does not represent a serious problem. It is just a warning about correct program use. For help resolving this problem, the administrator can send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error getting object data stream.**

This notification means that an error occurred when attempting to get the data stream of an object located on IMiS®/ARChive Server using *Document.DataStream* (.NET). The error could be caused by an interrupted connection or a problem with the server's compression library, or the object could already be closed. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error getting object input data stream.**

This notification means that an error occurred when attempting to get a data stream for reading an object located on IMiS®/ARChive Server using *Document.DataStream* (Java). The error could be caused by an interrupted connection, improper simultaneous use of the data stream for writing or a problem with the server's compression library, or the object could already be closed. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error getting object output data stream.**

This notification means that an error occurred when attempting to get a data stream for writing an object located on IMiS®/ARChive Server using *Document.getInputDataStream()* (Java). The error could be caused by an interrupted connection, improper simultaneous use of the data stream for reading or a problem with the server's compression library, or the object could already be closed.

This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error copying stream contents.**

This notification means that an error occurred when copying an object's contents through the object's data stream. The cause could be an issue in the input data stream or in the data stream for writing the object on IMiS®/ARChive Server. The error represents an issue that should be addressed by the manufacturer. Send a log of the error and a description to [support@imis.eu](mailto:support@imis.eu).

**6.3.2 Errors for IMiS®/ARChive Server 9****Demo license expired.**

This notification means that the test or demo version of IMiS®/Storage Connector .NET or Java has expired. To renew the demo version, contact [info@imis.eu](mailto:info@imis.eu).

**Error occurred while opening a session.**

This notification informs the user that an error occurred when attempting to establish a connection with IMiS®/ARChive Server. The cause of the error could be an incorrectly listed host name or port, an error determining the IP address from the host name, a network connection error, an unresponsive server, an invalid server response, or an error sent by the server when establishing a connection between the server and the client. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**User name or password for UserCredentials authentication is invalid.**

This notification informs the user that an error occurred when attempting to establish a connection with IMiS®/ARChive Server. The error is caused by unsuccessful authentication between the server and the client. This error does not represent a serious problem. It is just a warning that incorrect information was sent during authentication (an incorrect user name or password).

**Error occurred while getting available archives on server <host>.**

This notification informs the user that an error occurred when attempting to get archives on IMiS®/ARChive Server. This error is sent by the server.

This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while getting directory members on archive <host>.**

This notification informs the user that an error occurred when attempting to get groups or users from the directory on IMiS®/ARChive Server. This error is sent by the server.

This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while getting root classes on archive <host>.**

This notification informs the user that an error occurred when attempting to get collections of root classes on IMiS®/ARChive Server. This error is sent by the server.

This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while getting child entity stubs.**

This notification informs the user that an error occurred when attempting to get collections of sub-entities on IMiS®/ARChive Server. This error is sent by the server.

This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu)

**Error occurred while getting templates on archive <host>.**

This notification informs the user that an error occurred when attempting to get templates for entities on IMiS®/ARChive Server. This error is sent by the server. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while creating entity on archive <host>.**

This notification informs the user that an error occurred when attempting to create an entity on IMiS®/ARChive Server. The cause of the error could be that the user does not have read rights for the parent entity, the parent entity has *Closed* status, or some other error sent by the server when creating the entity. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while opening entity <entity\_identifier> on archive <host>.**

This notification informs the user that an error occurred when attempting to open an entity on IMiS®/ARChive Server. The cause of the error could be that the user does not have read rights, the entity is already open in write mode, or some other error sent by the server when opening the entity. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Operation on unsaved new entity is not allowed.**

This notification means that an unpermitted operation has been performed on a new, unsaved entity. This error occurs when the user attempts to access data that is generated only once an entity has been successfully saved on IMiS®/ARChive Server.

For example, this error occurs when reading *Id*, *ClassificationCode*, or *PublicClassificationCode* or when using the *GetReport* method in the *IEntity* interface. This error does not represent a serious problem. It is just a warning about correct use of the program.

**Operation on saved entity is not allowed.**

This notification means that an unpermitted operation has been performed on a saved entity. This error occurs when a user attempts to edit information that can only be set when creating a new entity. For example, this error occurs when changing values for *Id*, *ClassificationCode*, *Status* or *SecurityClass* in the *IEntity* interface. This error does not represent a serious problem. It is just a warning about correct use of the program.

**Operation on entity opened in read-only mode is not allowed.**

This notification means that an unpermitted operation has been performed on an entity opened in read-only mode. This error occurs when a user attempts to edit information about an entity that is open in read-only mode, such as when a user attempts to set new values for *Title*, *Description* or *Owner* in the *IEntity* interface. This error does not represent a serious problem. It is just a warning about correct use of the program.

**Operation on closed entity is not allowed.**

This notification means that an unpermitted operation has been performed on a closed entity. This error occurs when operations are performed on an entity after the *Close* method has been called up in the *IEntity* interface. This error does not represent a serious problem. It is just a warning about correct use of the program.

**Error occurred while committing entity changes on archive <host>.**

This notification informs the user that an error occurred when attempting to save changes to an entity on IMiS®/ARChive Server. This error is sent by the server when saving an entity. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while moving entity <entity\_identifier> on archive <host>.**

This notification informs the user that an error occurred when attempting to move an entity on IMiS®/ARChive Server. The cause of the error could be that the user does not have write rights, that one of the parent entities or the target parent entity has *Closed* status, or some other error sent by the server when creating the entity. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while removing entity <entity\_identifier> on archive <host>.**

This notification informs the user that an error occurred when attempting to delete an entity on IMiS®/ARChive Server. The cause of the error could be that the user does not have delete rights, that one of the parent entities has Closed status, that the entity is of Vital or Permanent significance or some other error sent by the server when deleting the entity. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while setting entity property value.**

This notification informs the user that an error occurred when attempting to set metadata values for an entity on IMiS®/ARChive Server. This error is sent by the server when setting metadata values. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Error occurred while creating binary/file/string value.**

This notification informs the user that an error occurred when attempting to create a binary/file/string value on IMiS®/ARChive Server. This error is sent by the server when creating a binary/file/string value. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).



**Error occurred while opening binary/file/string value data stream.**

This notification informs the user that an error occurred when attempting to open a binary/file/string value data stream for the property of an entity on IMiS®/ARChive Server. This error is sent by the server when opening an entity. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Property *<property\_name>* is not present in entity's template *<template\_identifier>*.**

This notification informs the user that an error occurred when attempting to read or write the metadata of an entity on IMiS®/ARChive Server. The error is caused by an incorrect archive server configuration. This issue needs to be addressed by the manufacturer. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**System property *<property\_name>* is not present in entity's template *<template\_identifier>*.**

This notification informs the user that an error occurred when attempting to read or write the system metadata of an entity on IMiS®/ARChive Server. The error is caused by an incorrect archive server configuration. This issue needs to be addressed by the manufacturer. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).

**Generic argument type *<generic\_type>* is not compatible with property type *<property\_type>*.**

This notification informs the user that an error occurred when attempting to read or write the metadata of an entity. This error is caused when a generic type which does not match the type of values in the metadata is used when calling up the *GetValue/GetValues* or *SetValue/SetValues* method in the *IReadOnlyProperty/IProperty* interface. This error does not represent a serious problem. It is just a warning about correct program use.

**Error occurred while performing search on archive/entity <host/entity\_identifier>.**

This notification informs the user that an error occurred when attempting to search the entire archive or below the selected entity on IMiS®/ARChive Server. This error is sent by the server when searching the archive. This error is critical, and there is a chance that the product manufacturer will need to intervene. We advise users to promptly send a log of the error to the manufacturer at [support@imis.eu](mailto:support@imis.eu).